


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CATERPILLAR 775F HAUL TRUCK 6151 (S/N DLS00524)
Component
Rear Left Differential
Fluid
NOT GIVEN (--- GAL)

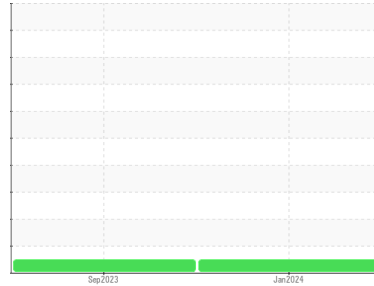

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10002979	TO10002736	---
Sample Date	Client Info			26 Jan 2024	29 Sep 2023	---
Machine Age	hrs	Client Info		1073	542	---
Oil Age	hrs	Client Info		1073	542	---
Oil Changed	Client Info			Not Chngd	Not Chngd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	---





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		72	42	---
Iron	ppm	ASTM D5185m	>500	51	42	---
Chromium	ppm	ASTM D5185m	>3	<1	<1	---
Nickel	ppm	ASTM D5185m	>3	<1	0	---
Titanium	ppm	ASTM D5185m	>2	<1	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>30	3	2	---
Lead	ppm	ASTM D5185m	>13	1	1	---
Copper	ppm	ASTM D5185m	>103	5	4	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		3	3	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		2	2	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		26	26	---
Calcium	ppm	ASTM D5185m		2677	2716	---
Phosphorus	ppm	ASTM D5185m		958	943	---
Zinc	ppm	ASTM D5185m		1104	1149	---
Sulfur	ppm	ASTM D5185m		4307	4368	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>100	32	35	---
Sodium	ppm	ASTM D5185m		4	5	---
Potassium	ppm	ASTM D5185m	>20	1	3	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.06	1.09	---

OIL ANALYSIS REPORT





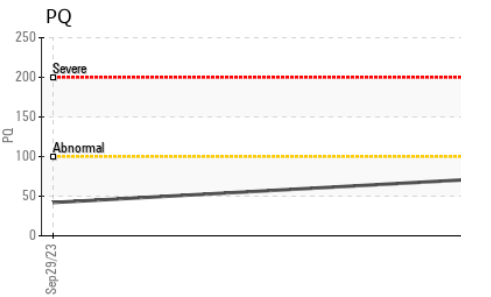
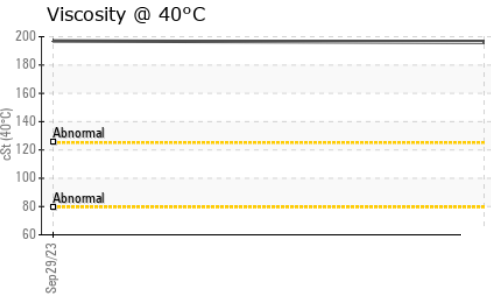
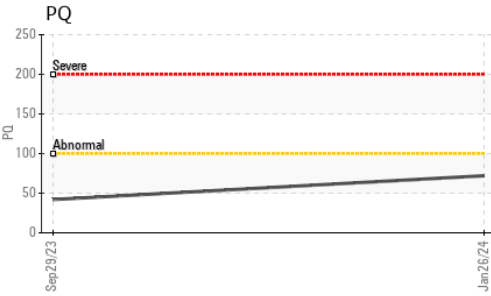
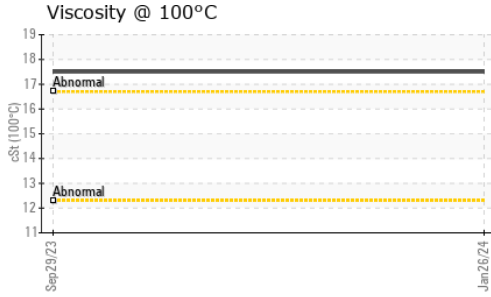


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	196	197	---
Visc @ 100°C	cSt	ASTM D445	17.5	17.5	---
Viscosity Index (VI)	Scale	ASTM D2270	96	95	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

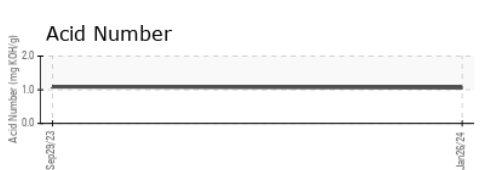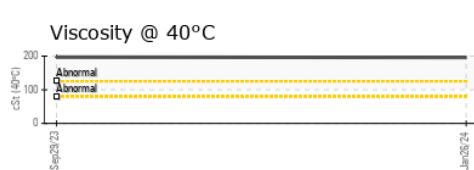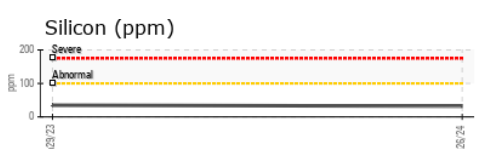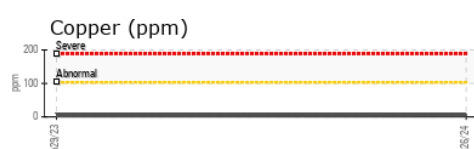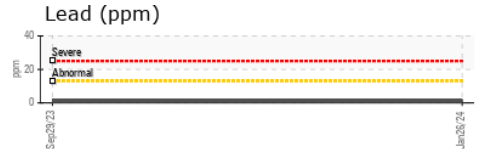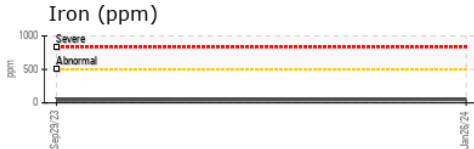

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002979 **Recieved** : 31 Jan 2024
Lab Number : 06076423 **Diagnosed** : 02 Feb 2024
Unique Number : 10858514 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com
 T: (918)928-4575
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)