




OIL ANALYSIS REPORT

Sample Rating Trend

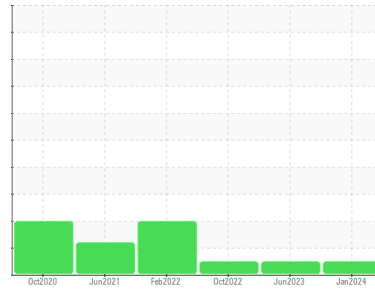

NORMAL



Machine Id
109564

Component
Diesel Engine

Fluid
SHELL ROTELLA T 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			IL0033064	IL0027512	IL0027731
Sample Date	Client Info			24 Jan 2024	09 Jun 2023	27 Oct 2022
Machine Age	mls Client Info			136460	117136	93024
Oil Age	mls Client Info			19324	24112	18962
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	35	35	35
Chromium	ppm	ASTM D5185m	>20	1	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	13	13	17
Lead	ppm	ASTM D5185m	>40	0	1	0
Copper	ppm	ASTM D5185m	>330	2	1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	316	45	▲ 28	45
Barium	ppm	ASTM D5185m	0.0	<1	0	0
Molybdenum	ppm	ASTM D5185m	1.2	36	92	44
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	24	236	▲ 86	450
Calcium	ppm	ASTM D5185m	2292	1873	2367	1849
Phosphorus	ppm	ASTM D5185m	1064	942	1021	1043
Zinc	ppm	ASTM D5185m	1160	1157	1323	1406
Sulfur	ppm	ASTM D5185m	4996	3164	4409	3526



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11	7	8
Sodium	ppm	ASTM D5185m		0	3	2
Potassium	ppm	ASTM D5185m	>20	14	10	19

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	11.9	12.6	13.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.2	26.1	27.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.1	22.5	27.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.7	5	9.4







OIL ANALYSIS REPORT

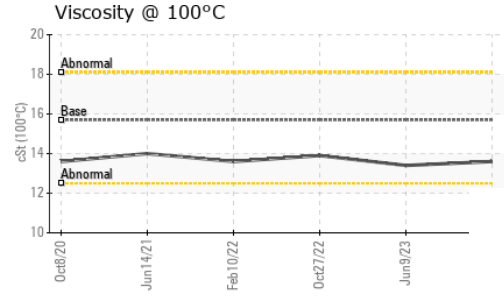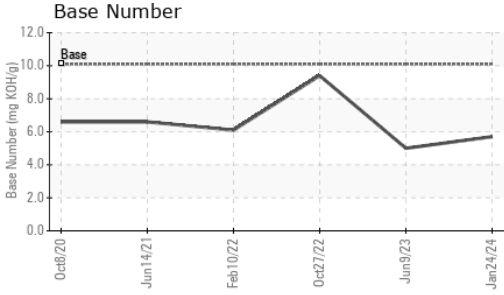

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	13.6	13.4	13.9

GRAPHS

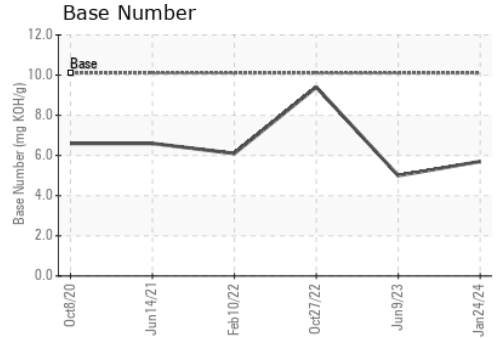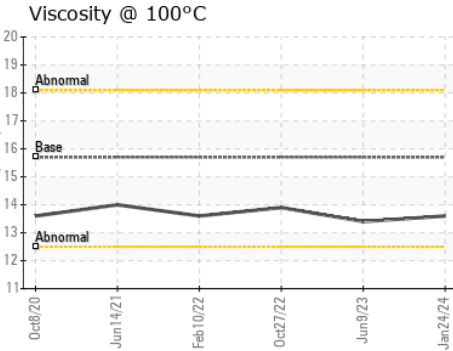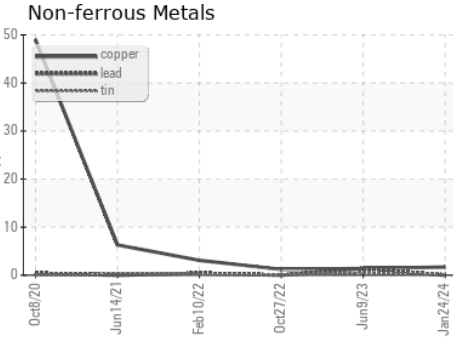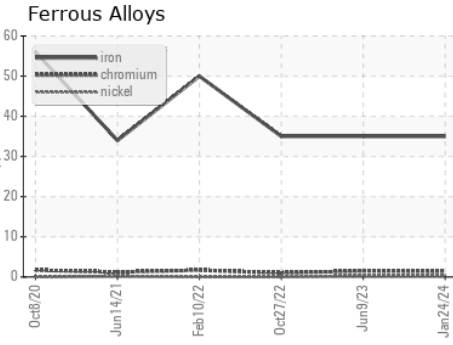

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0033064 **Recieved** : 01 Feb 2024
Lab Number : **06076703** **Diagnosed** : 02 Feb 2024
Unique Number : 10858794 **Diagnostician** : Wes Davis
Test Package : FLEET

IDEALASE OF NORTHWEST WI
 611 HANSEN ROAD
 GREEN BAY, WI
 US 54304
 Contact: GARY KOLTZ
 gkoltz@pcitrucks.com
 T: (920)499-6200
 F: (920)499-5332

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)