



OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Machine Id
5000-1 (S/N 090106)

Component
Hydraulic System

Fluid
SAFETY-KLEEN PERFORMANCE PLUS HYD. AW32 (66 GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PH0002340	---	---
Sample Date	Client Info		26 Jan 2024	---	---
Machine Age	yrs	Client Info	0	---	---
Oil Age	yrs	Client Info	1	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	---	---
Chromium	ppm	ASTM D5185m >20	0	---	---
Nickel	ppm	ASTM D5185m >20	0	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	0	---	---
Lead	ppm	ASTM D5185m >20	<1	---	---
Copper	ppm	ASTM D5185m >20	<1	---	---
Tin	ppm	ASTM D5185m >20	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 11	0	---	---
Barium	ppm	ASTM D5185m 0.0	0	---	---
Molybdenum	ppm	ASTM D5185m 1.2	0	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m 0.0	0	---	---
Calcium	ppm	ASTM D5185m 35	6	---	---
Phosphorus	ppm	ASTM D5185m 324	335	---	---
Zinc	ppm	ASTM D5185m 400	423	---	---
Sulfur	ppm	ASTM D5185m 1528	799	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	0	---	---
Sodium	ppm	ASTM D5185m	<1	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

FLUID CLEANLINESS







	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	▲ 11001	---	---
Particles >6µm	ASTM D7647	>40	▲ 4644	---	---
Particles >14µm	ASTM D7647	>10	▲ 662	---	---
Particles >21µm	ASTM D7647	>3	▲ 177	---	---
Particles >38µm	ASTM D7647	>3	▲ 6	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>16/12/10	▲ 21/19/17	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.26	---	---



OIL ANALYSIS REPORT

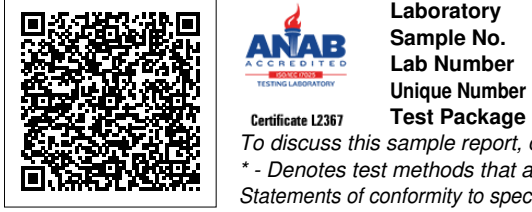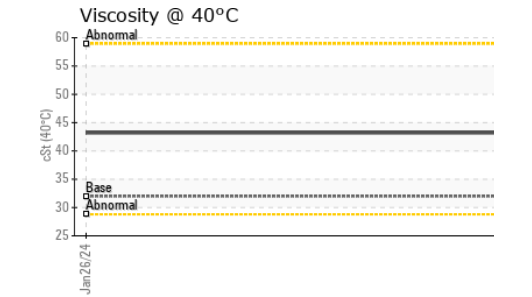
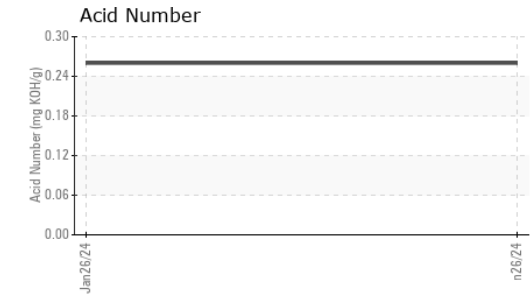
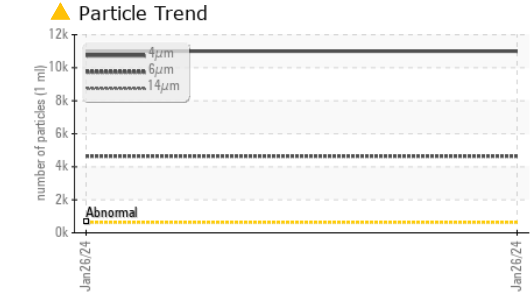
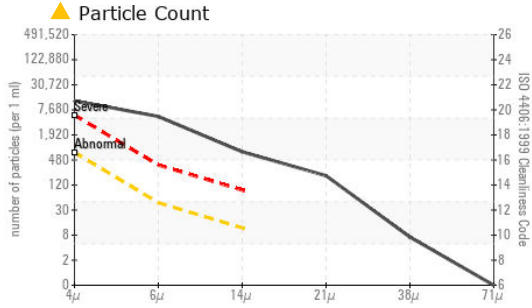


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.0	43.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

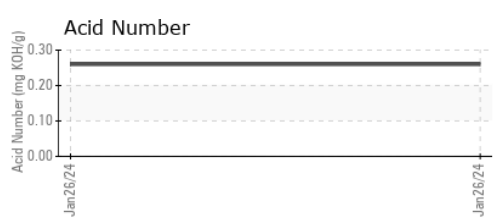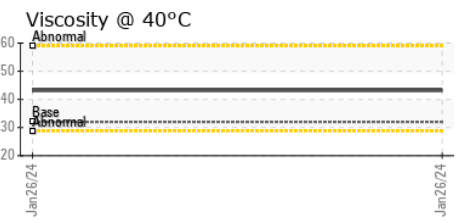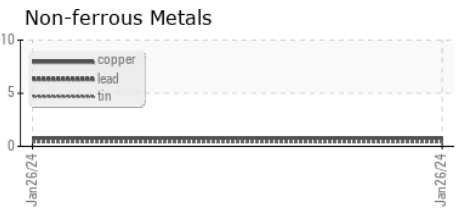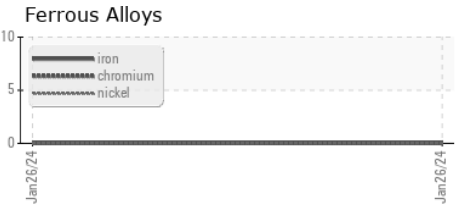

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0002340 **Recieved** : 01 Feb 2024
Lab Number : 06076834 **Diagnosed** : 05 Feb 2024
Unique Number : 10858925 **Diagnostician** : Jonathan Hester
Test Package : PLANT (Additional Tests: PrtFilter)

BSH HOME APPLIANCES
 130 MEMORIAL DR
 JACKSBORO, TN
 US 37757
 Contact: STEVE WILSON
 steve.wilson@bshg.com
 T: (423)563-6119
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)