


Area
Paper Cup Machines
 Machine Id
PMC 1003 POS-218 (S/N 1144378)
 Component
Circulating System
 Fluid
SUMMIT Syngear SH-1032 320 (85 GAL)

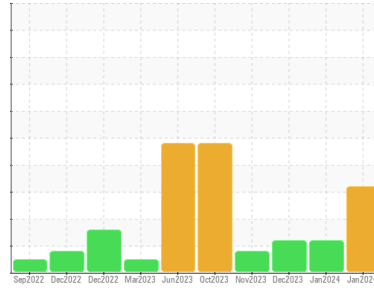

DIAGNOSIS

- ▲ **Recommendation**
 We recommend you service the filters on this component. Resample at the next service interval to monitor.
- ▲ **Wear**
 All component wear rates are normal.
- ▲ **Contamination**
 There is a high amount of particulates present in the oil.
- ▲ **Fluid Condition**
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO50002008	TO50001950	TO50001980
Sample Date	Client Info			27 Jan 2024	21 Jan 2024	27 Dec 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Filtered	Filtered	Filtered
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		16	18	16
Iron	ppm	ASTM D5185m		5	0	6
Chromium	ppm	ASTM D5185m		0	0	<1
Nickel	ppm	ASTM D5185m		▲ 29	0	19
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		0	0	2
Lead	ppm	ASTM D5185m		1	0	0
Copper	ppm	ASTM D5185m		2	3	2
Tin	ppm	ASTM D5185m		1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		97	86	98
Barium	ppm	ASTM D5185m		0	0	21
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		0	3	3
Phosphorus	ppm	ASTM D5185m		461	439	501
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		6701	6315	8569

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		14495	9819	16157
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304		0.012	0.017	0.017
ppm Water	ppm	ASTM D6304		128	179	176

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	▲ 1514	▲ 66864	---
Particles >6µm		ASTM D7647	>320	▲ 825	▲ 5564	---
Particles >14µm		ASTM D7647	>80	▲ 140	35	---
Particles >21µm		ASTM D7647	>20	▲ 47	5	---
Particles >38µm		ASTM D7647	>4	▲ 7	0	---
Particles >71µm		ASTM D7647	>3	1	0	---
Oil Cleanliness		ISO 4406 (c)	>17/15/13	▲ 18/17/14	▲ 23/20/12	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.91	0.67	0.68

OIL ANALYSIS REPORT

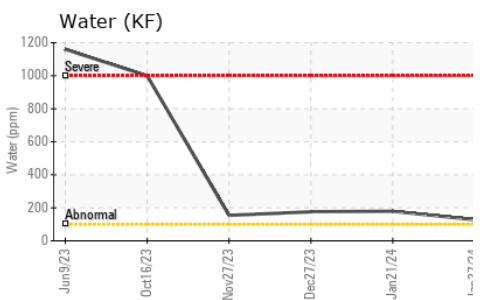
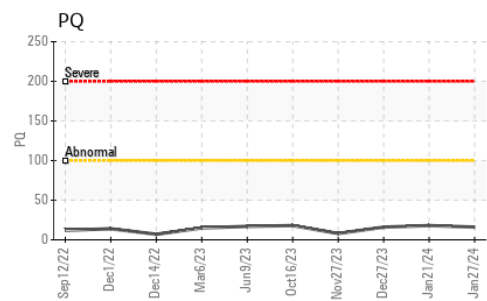
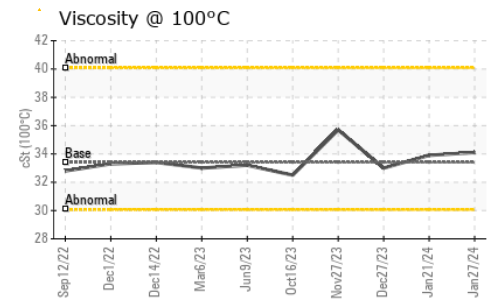
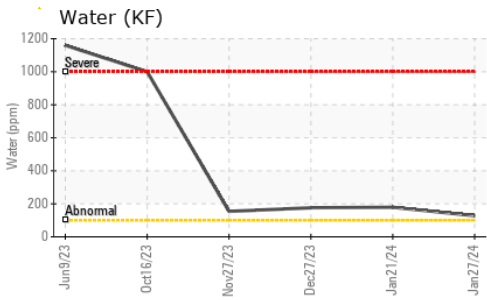
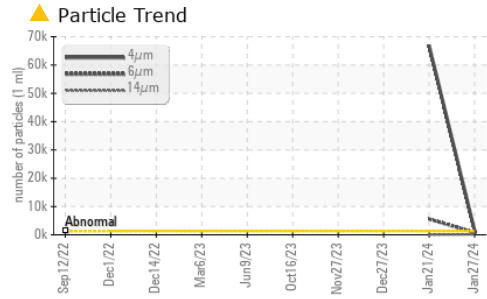


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	MILKY	▲ LAYRD
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	344	332
Visc @ 100°C	cSt	ASTM D445	33.4	34.1	33.9
Viscosity Index (VI)	Scale	ASTM D2270	145	141	144

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

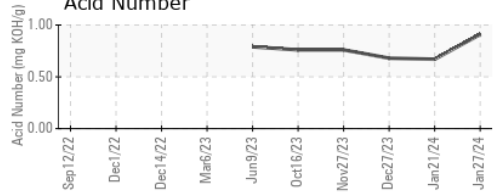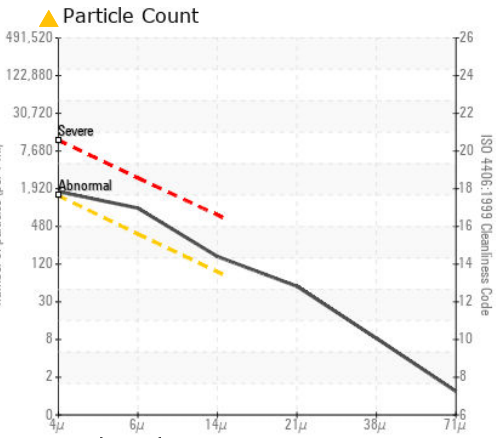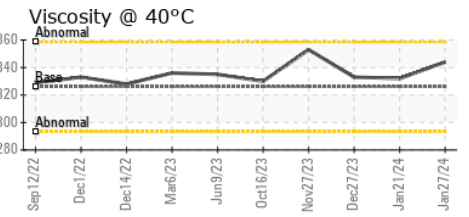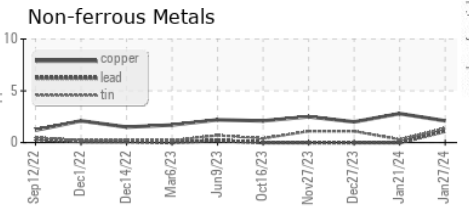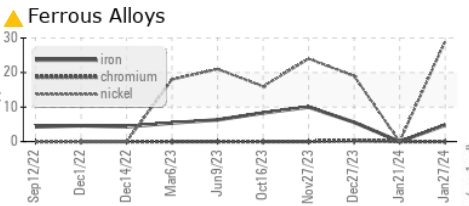

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50002008 **Received** : 01 Feb 2024
Lab Number : 06076839 **Tested** : 07 Feb 2024
Unique Number : 10858930 **Diagnosed** : 07 Feb 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F: