


Area
Paper Cup Machines
 Machine Id
PMC 1003 POS-216 (S/N 159158)
 Component
Circulating System
 Fluid
SUMMIT Syngear SH-1032 320 (85 GAL)

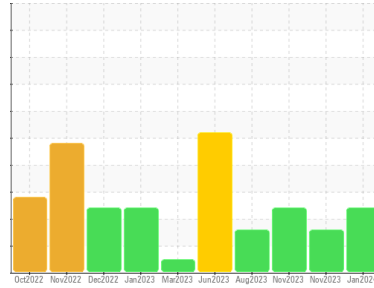

DIAGNOSIS

Recommendation
 We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of particulates present in the oil. Appearance is milky.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		TO50002016	TO50001750	TO50001958
Sample Date	Client Info		29 Jan 2024	16 Nov 2023	07 Nov 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Changed	Not Changed	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		18	12	33
Iron	ppm	ASTM D5185m	3	4	6
Chromium	ppm	ASTM D5185m	0	<1	0
Nickel	ppm	ASTM D5185m	3	1	3
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m	0	2	<1
Lead	ppm	ASTM D5185m	1	0	0
Copper	ppm	ASTM D5185m	<1	1	<1
Tin	ppm	ASTM D5185m	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	8	6	7
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	0	<1	0
Calcium	ppm	ASTM D5185m	0	<1	0
Phosphorus	ppm	ASTM D5185m	153	166	134
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m	1613	1888	1607


CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	1267	1081	1220
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	2
Water	%	ASTM D6304	0.007	0.011	0.008
ppm Water	ppm	ASTM D6304	76	116	84.7

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	▲ 13676	---	▲ 116228
Particles >6µm	ASTM D7647	>320	▲ 3206	---	▲ 28589
Particles >14µm	ASTM D7647	>80	▲ 101	---	▲ 1831
Particles >21µm	ASTM D7647	>20	16	---	▲ 498
Particles >38µm	ASTM D7647	>4	0	---	▲ 17
Particles >71µm	ASTM D7647	>3	0	---	0
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 21/19/14	---	▲ 24/22/18

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.44	0.37	0.38


OIL ANALYSIS REPORT

▲ Particle Trend

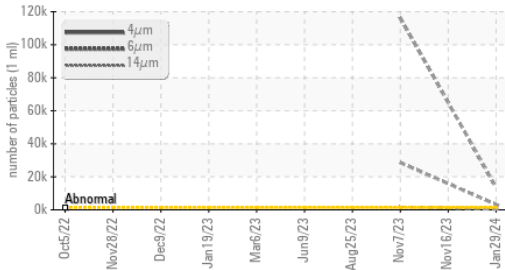


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	▲ MODER	NONE
Debris	scalar	*Visual	NONE	▲ LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	▲ NORML	▲ HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	▲ NEG	NEG	NEG
Free Water	scalar	*Visual	▲ NEG	NEG	NEG

Water (KF)

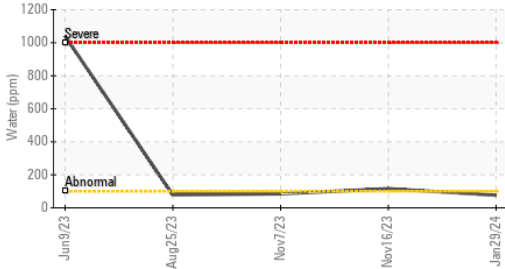

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	312	316
Visc @ 100°C	cSt	ASTM D445	33.4	35.0	34.7
Viscosity Index (VI)	Scale	ASTM D2270	145	157	154


Viscosity @ 100°C

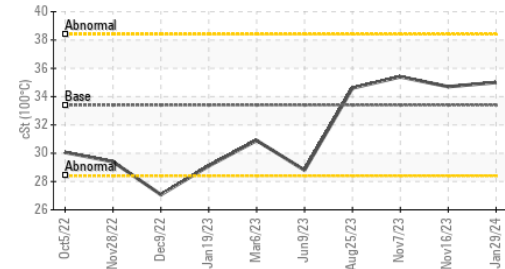

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

Bottom

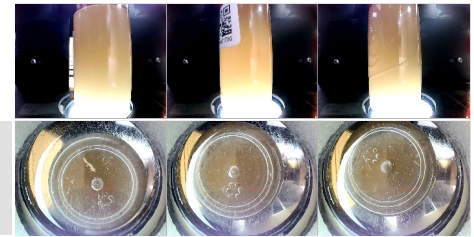


GRAPHS


Ferrous Alloys

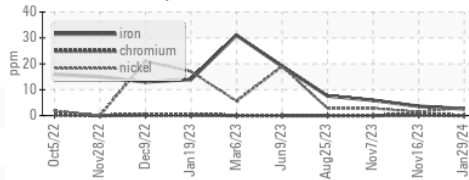


Non-ferrous Metals

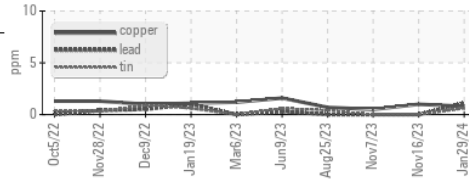


Viscosity @ 40°C

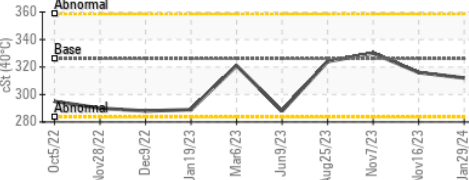


▲ Particle Count

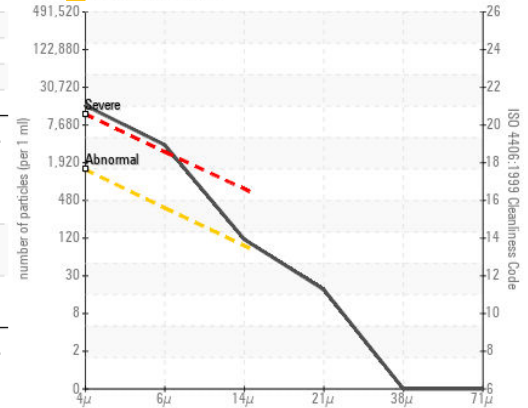


Acid Number

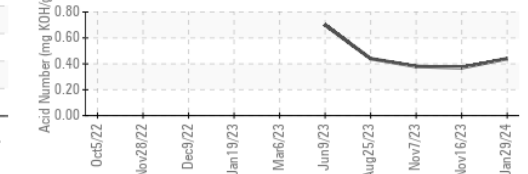

PQ

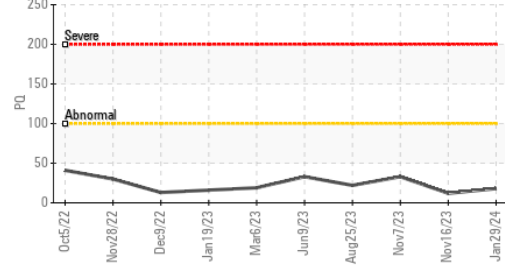

Viscosity @ 100°C

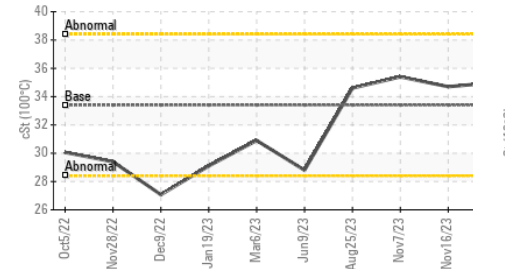

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50002016 **Received** : 01 Feb 2024
Lab Number : 06076846 **Diagnosed** : 03 Feb 2024
Unique Number : 10858937 **Diagnostician** : Don Baldrige

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)