


# **OIL ANALYSIS REPORT**

# KAESER BSD 50 2774222 (S/N 1064)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

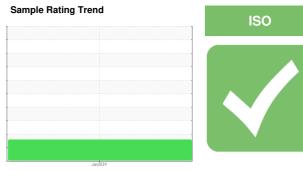

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA001726		
Sample Date		Client Info		26 Jan 2024		
Machine Age	hrs	Client Info		60499		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	6		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m	-	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES	PP		limit/bass		history	history/2
		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	26		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		27		
Sulfur	ppm	ASTM D5185m		17529		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		12		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.012		
ppm Water	ppm	ASTM D6304	>500	120		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3778		
Particles >6µm		ASTM D7647	>1300	<b>1351</b>		
Particles >14µm		ASTM D7647	>80	<b>146</b>		
Particles >21µm		ASTM D7647	>20	<b>47</b>		
Particles >38µm		ASTM D7647	>4	2		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>1</b> 9/18/14		
FLUID DEGRADA	LAOIT	method	limit/base	current	history1	history2
Acid Number (AN)		ACTM DODAE		0.24	— Iliotory I	- mstoryz


Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.34



## **OIL ANALYSIS REPORT**

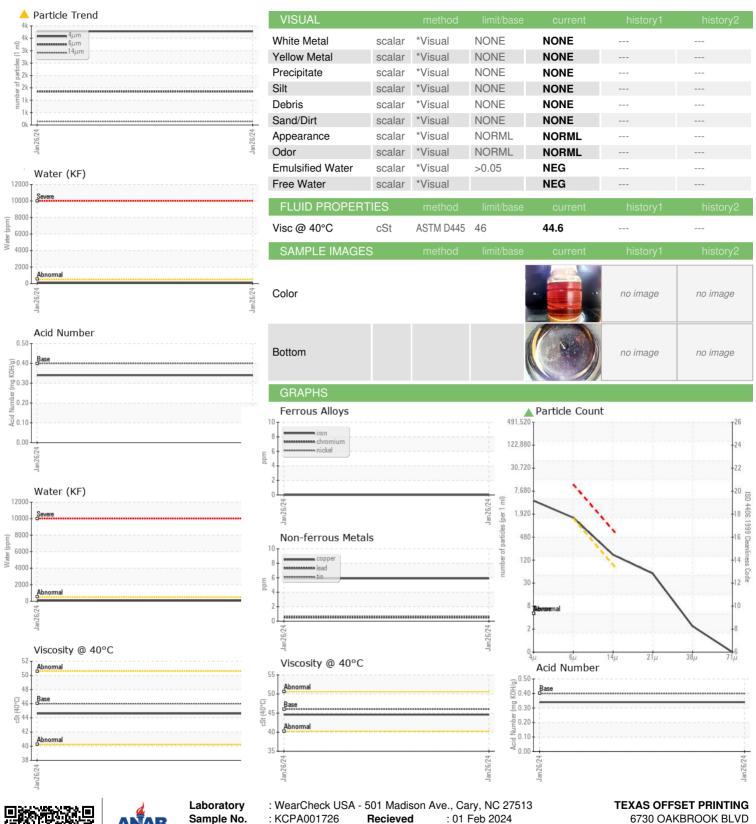



Sample No. Lab Number **Unique Number** 

: 06076862

: KCPA001726 : 10858953

Recieved Diagnosed

: 02 Feb 2024

Diagnostician : Don Baldridge

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DALLAS, TX US 75235

Contact: Service Manager

T: F: