

OIL ANALYSIS REPORT

Sample Rating Trend ISO

^{Machine Id} 7087945 (S/N 1398) Component

Compressor KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


IATION	method	limit/base	current	history1	history2
	Client Info		KCPA008954	KCP46848D	KCP50233
	Client Info		23 Jan 2024	28 Dec 2022	19 Aug 2022
hrs	Client Info		19302	14169	12621
hrs	Client Info		0	1548	2567
	Client Info		Changed	Changed	Changed
			ABNORMAL	ATTENTION	ABNORMAL
	method	limit/base	current	history1	history2
ppm	ASTM D5185m	>50	0	4	3
ppm	ASTM D5185m	>10	0	0	0
ppm	ASTM D5185m	>3	0	0	0
ppm	ASTM D5185m	>3	<1	0	0
ppm	ASTM D5185m	>2	0	0	0
ppm	ASTM D5185m	>10	1	7	5
ppm	ASTM D5185m	>10	<1	0	0
ppm	ASTM D5185m	>50	2	12	9
ppm	ASTM D5185m	>10	<1	0	<1
ppm	ASTM D5185m				
ppm	ASTM D5185m		0	0	0
ppm	ASTM D5185m		0	0	0
	method	limit/base	current	history1	history2
maa	ASTM D5185m		0		0
				0	0
				0	0
					0
			-	1	0
			0	0	0
		500	23	494	344
			6	299	295
	ASTM D5185m		1000	1699	1458
	method	limit/base	current	history1	history2
		limit/base	current	history1	history2
ppm	ASTM D5185m		0	2	0
ppm	ASTM D5185m ASTM D5185m	>25	0 <1	2 <1	0
ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	0 <1 0	2 <1 0	0 0 0 0
ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	0 <1 0 0.003	2 <1 0 0.007	0 0 0 0.005
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	0 <1 0 0.003 29	2 <1 0 0.007 70.9	0 0 0 0.005 55.7
ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05	0 <1 0 0.003 29 current	2 <1 0.007 70.9 history1	0 0 0.005 55.7 history2
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	0 <1 0 0.003 29 current 8661	2 <1 0 0.007 70.9 history1 5102	0 0 0.005 55.7 history2 9421
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	0 <1 0 0.003 29 <u>current</u> 8661 ▲ 3177	2 <1 0 0.007 70.9 history1 5102 ▲ 1895	0 0 0.005 55.7 history2 9421 ▲ 3087
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	0 <1 0 0.003 29 <u>current</u> 8661 ▲ 3177 ▲ 143	2 <1 0 0.007 70.9 history1 5102 ▲ 1895 71	0 0 0 0.005 55.7 history2 9421 ▲ 3087 ▲ 122
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	0 <1 0 0.003 29 <u>current</u> 8661 ▲ 3177 ▲ 143 ▲ 29	2 <1 0 0.007 70.9 history1 5102 ▲ 1895 71 10	0 0 0.005 55.7 history2 9421 ▲ 3087 ▲ 122 ▲ 23
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	0 <1 0 0.003 29 <u>current</u> 8661 ▲ 3177 ▲ 143 ▲ 29 1	2 <1 0 0.007 70.9 history1 5102 ▲ 1895 71 10 0	0 0 0.005 55.7 history2 9421 ▲ 3087 ▲ 122 ▲ 23 1
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	0 <1 0 0.003 29 current 8661 ▲ 3177 ▲ 143 ▲ 29 1 0	2 <1 0 0.007 70.9 history1 5102 ▲ 1895 71 10 0 0	0 0 0.005 55.7 history2 9421 3087 122 23 1 0
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	0 <1 0 0.003 29 <u>current</u> 8661 ▲ 3177 ▲ 143 ▲ 29 1	2 <1 0 0.007 70.9 history1 5102 ▲ 1895 71 10 0	0 0 0.005 55.7 history2 9421 ▲ 3087 ▲ 122 ▲ 23 1
ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	0 <1 0 0.003 29 current 8661 ▲ 3177 ▲ 143 ▲ 29 1 0	2 <1 0 0.007 70.9 history1 5102 ▲ 1895 71 10 0 0	0 0 0 0.005 55.7 history2 9421 ▲ 3087 ▲ 122 ▲ 23 1 0
	hrs hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client InfoClient InfoNrsClient InfohrsClient InfoClient InfoClient InfoClient InfoClient InfoDrmASTM D5185mppmASTM D5185m	Client InfoClient InfoInrsClient InfohrsClient InfoClient InfoInit/baseClient InfoInit/baseClient InfoInit/baseMrsASTM D5185mSATM D5185m>50ppmASTM D5185mASTM D5185m>3ppmASTM D5185mppmASTM D5185m	Client InfoKCPA008954Client Info23 Jan 2024hrsClient Info19302hrsClient Info0Client InfoChangedArrowImit/baseCurrentppmASTM D5185m>500ppmASTM D5185m>30ppmASTM D5185m>30ppmASTM D5185m>30ppmASTM D5185m>30ppmASTM D5185m>30ppmASTM D5185m>3<1	Client Info KCPA008954 KCP46848D Client Info 23 Jan 2024 28 Dec 2022 hrs Client Info 19302 14169 hrs Client Info 0 1548 Client Info 0 1548 Client Info Changed Changed hrs Client Info Changed ATTENTION method Imit/base current history1 ppm ASTM D5185m >50 0 4 ppm ASTM D5185m >10 0 0 ppm ASTM D5185m >3 <10


Report Id: NPIPLA [WUSCAR] 06076874 (Generated: 02/02/2024 17:54:06) Rev: 1


Contact/Location: Service Manager - NPIPLA



OIL ANALYSIS REPORT






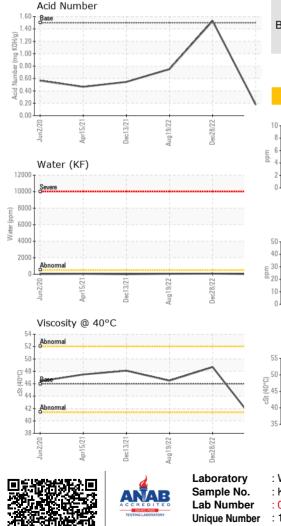


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	39.8	48.7	46.5
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

Color



Bottom

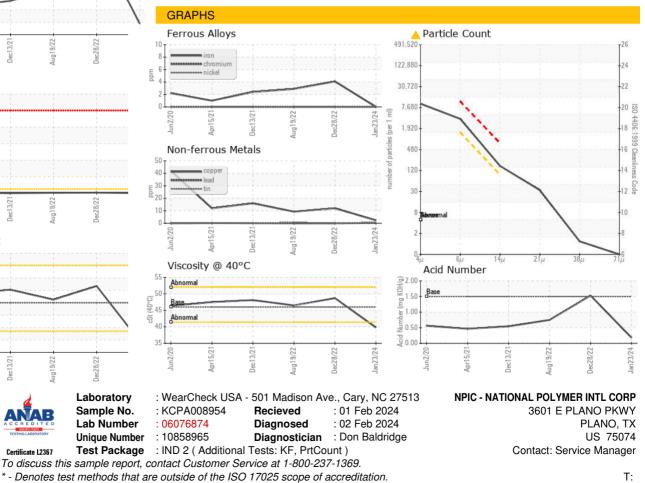

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - NPIPLA

F: