

OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
8392173 (S/N 1143)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KCPA009944	---	---
Sample Date	Client Info	20 Dec 2023	---	---
Machine Age	hrs Client Info	12011	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	0	---	---
Chromium ppm	ASTM D5185m >10	0	---	---
Nickel ppm	ASTM D5185m >3	0	---	---
Titanium ppm	ASTM D5185m >3	<1	---	---
Silver ppm	ASTM D5185m >2	0	---	---
Aluminum ppm	ASTM D5185m >10	<1	---	---
Lead ppm	ASTM D5185m >10	2	---	---
Copper ppm	ASTM D5185m >50	5	---	---
Tin ppm	ASTM D5185m >10	<1	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 0	0	---	---
Barium ppm	ASTM D5185m 90	2	---	---
Molybdenum ppm	ASTM D5185m 0	0	---	---
Manganese ppm	ASTM D5185m	3	---	---
Magnesium ppm	ASTM D5185m 100	63	---	---
Calcium ppm	ASTM D5185m 0	0	---	---
Phosphorus ppm	ASTM D5185m 0	0	---	---
Zinc ppm	ASTM D5185m 0	<1	---	---
Sulfur ppm	ASTM D5185m 23500	18262	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	<1	---	---
Sodium ppm	ASTM D5185m	13	---	---
Potassium ppm	ASTM D5185m >20	<1	---	---
Water %	ASTM D6304 >0.05	0.027	---	---
ppm Water	ASTM D6304 >500	279	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	10538	---	---
Particles >6µm	ASTM D7647 >1300	▲ 4486	---	---
Particles >14µm	ASTM D7647 >80	▲ 836	---	---
Particles >21µm	ASTM D7647 >20	▲ 281	---	---
Particles >38µm	ASTM D7647 >4	▲ 19	---	---
Particles >71µm	ASTM D7647 >3	1	---	---
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 21/19/17	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 1.0	0.39	---	---

OIL ANALYSIS REPORT

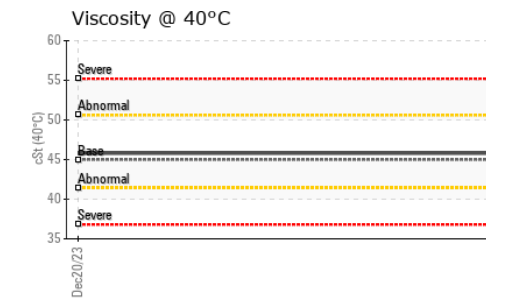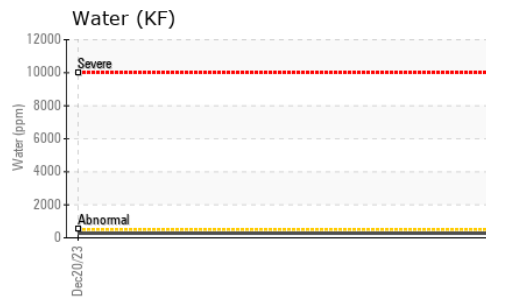
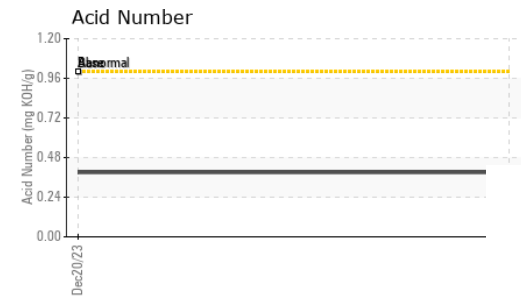
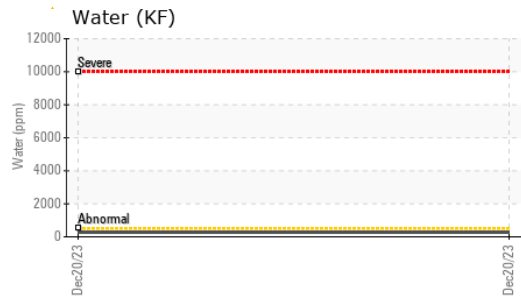
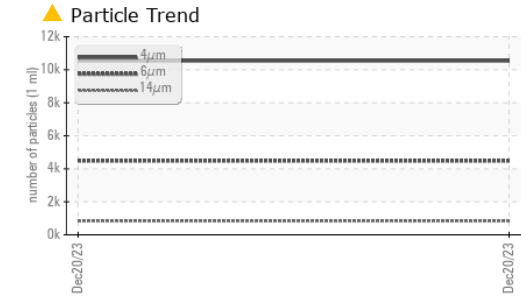


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

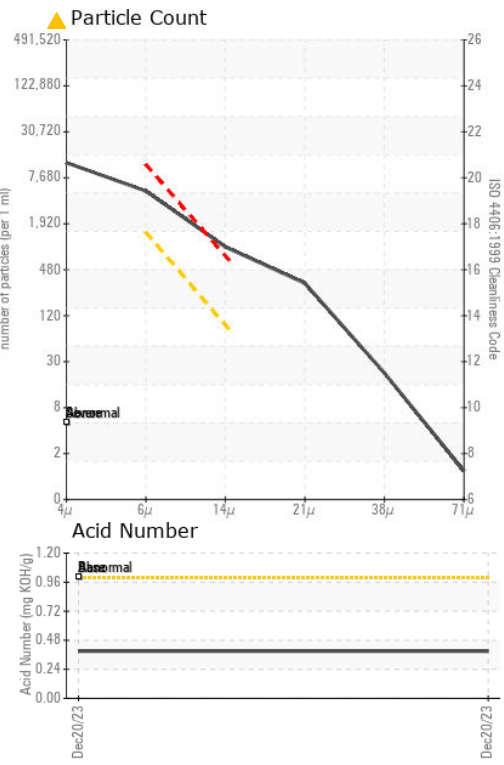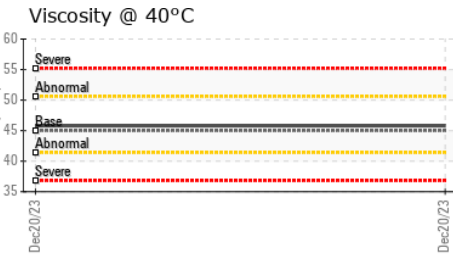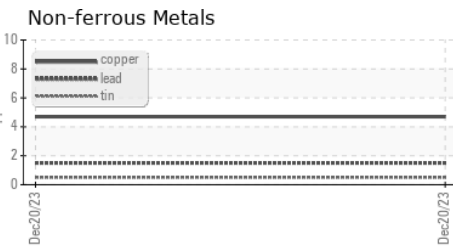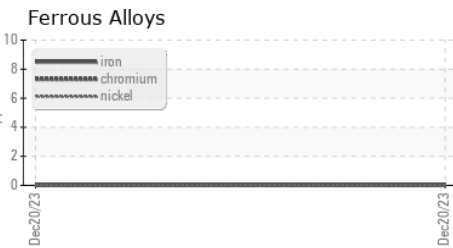

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA009944 **Received** : 01 Feb 2024
Lab Number : 06076903 **Diagnosed** : 02 Feb 2024
Unique Number : 10858994 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

SANISURE
 1230 CALLE SUERTE
 CAMARILLO, CA
 US 93012
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)