


Area  
**PALASYN 45 [45562]**  
Machine Id  
**SULLIVAN PALATEK 19KE000540 - COLORADO MOLDED PLASTICS**  
Component  
**Compressor**

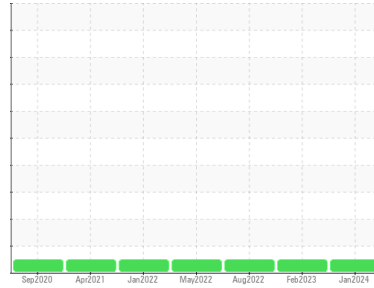

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>UCS06077027</b>	UCS05792959	UCS05630082	
Sample Date	Client Info	<b>24 Jan 2024</b>	16 Feb 2023	15 Aug 2022	
Machine Age	hrs	Client Info	<b>10333</b>	7369	5833
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

**CONTAMINATION** method limit/base current history1 history2

Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
-------	-----------	------	------------	-----	-----

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	<1	0
Phosphorus	ppm	ASTM D5185m	966	<b>485</b>	417	480
Zinc	ppm	ASTM D5185m	0	<b>2</b>	0	0
Sulfur	ppm	ASTM D5185m	1309	<b>761</b>	1134	1279



**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	<b>1</b>	1	2
Sodium	ppm	ASTM D5185m		<b>0</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	<b>0.19</b>	0.17	0.15
------------------	----------	------------	-------	-------------	------	------


# OIL ANALYSIS REPORT

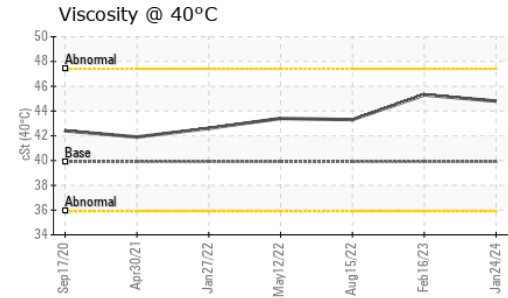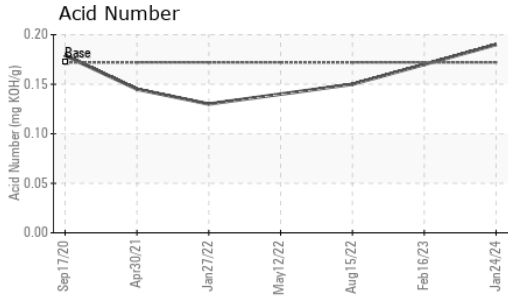





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	MODER	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	39.9	<b>44.8</b>	45.3	43.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

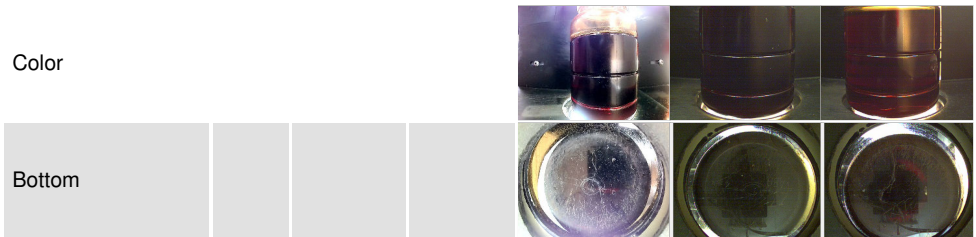

## GRAPHS

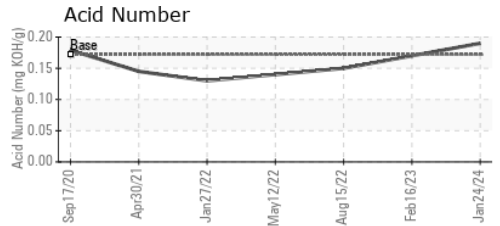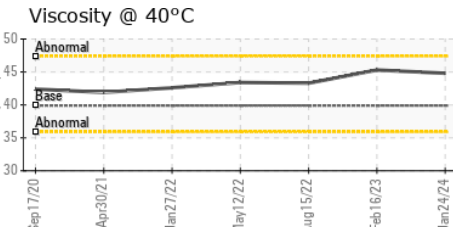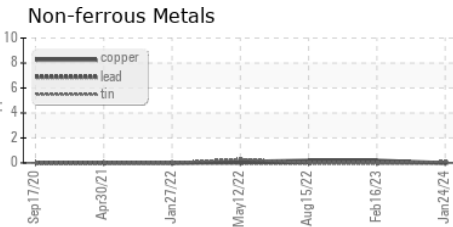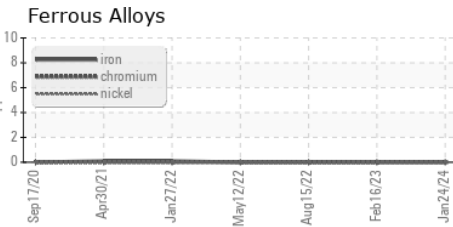

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06077027 **Recieved** : 01 Feb 2024  
**Lab Number** : **06077027** **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10859118 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**COMPRESSION LEASING SERVICES INC**  
 5530 JOLIET ST  
 DENVER, CO  
 US 80239  
 Contact: HEATH NORRIS  
 hnorris@cls-inc.com  
 T: (308)733-4882  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)