



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
HAYSITE 8-1

Component
Heat Transfer Fluid

Fluid
HEAT TRANSFER FLUID ISO 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0884806	---	---
Sample Date	Client Info		31 Jan 2024	---	---
Machine Age	mths	Client Info	8	---	---
Oil Age	mths	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.0601	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	0	---	---
Chromium	ppm	ASTM D5185m	>21	0	---	---
Nickel	ppm	ASTM D5185m	>21	0	---	---
Titanium	ppm	ASTM D5185m	>21	0	---	---
Silver	ppm	ASTM D5185m	>21	0	---	---
Aluminum	ppm	ASTM D5185m	>21	0	---	---
Lead	ppm	ASTM D5185m	>21	0	---	---
Copper	ppm	ASTM D5185m	>21	0	---	---
Tin	ppm	ASTM D5185m	>21	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	<1	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	5	<1	---	---
Calcium	ppm	ASTM D5185m	5	4	---	---
Phosphorus	ppm	ASTM D5185m	250	5	---	---
Zinc	ppm	ASTM D5185m	5	27	---	---
Sulfur	ppm	ASTM D5185m	3000	4	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<1	---	---
Sodium	ppm	ASTM D5185m	>21	0	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		5325	---	---
Particles >6µm	ASTM D7647	>10240000	271	---	---
Particles >14µm	ASTM D7647	>10240000	12	---	---
Particles >21µm	ASTM D7647	>2560000	4	---	---
Particles >38µm	ASTM D7647	>640000	0	---	---
Particles >71µm	ASTM D7647	>160000	0	---	---
Oil Cleanliness	ISO 4406 (c)	>--/30/30	20/15/11	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.41	0.30	---	---



OIL ANALYSIS REPORT

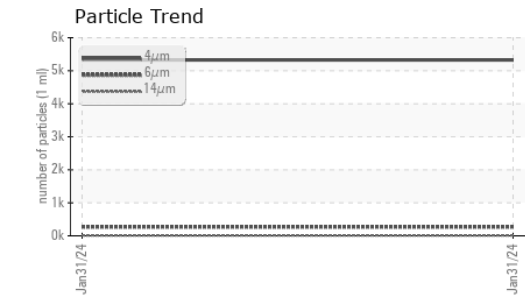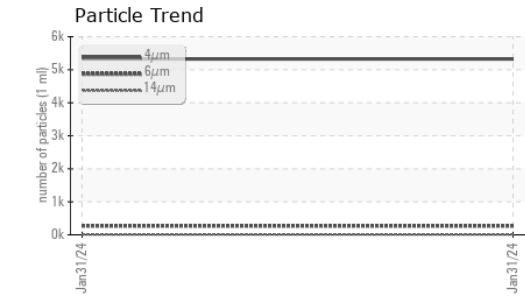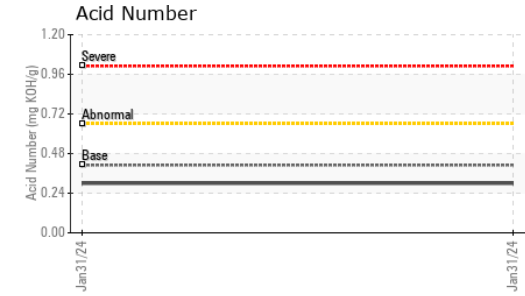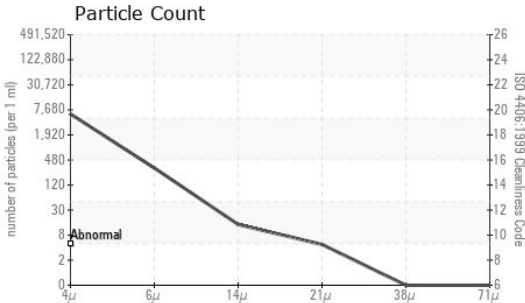


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.0601	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	100	18.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

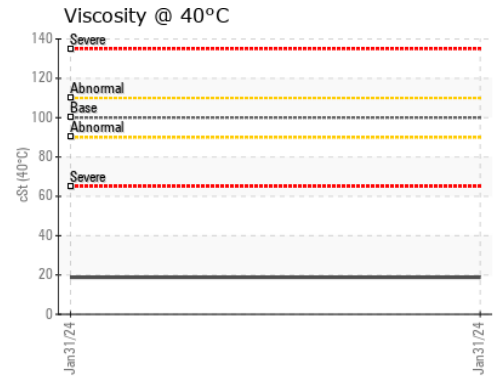

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0884806 **Recieved** : 01 Feb 2024
Lab Number : **06077648** **Diagnosed** : 05 Feb 2024
Unique Number : 10859739 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BEACON LUBRICANTS
 P.O. BOX 754
 EDINBORO, PA
 US 16412

Contact: Brent Hulings
 purchasing@beaconlubricants.com

T: (814)734-7535

F: (814)734-3460