



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
HAYSITE 8-2

Component
Heat Transfer Fluid

Fluid
HEAT TRANSFER FLUID ISO 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0884805 | --- | --- |
| Sample Date | Client Info | | 31 Jan 2024 | --- | --- |
| Machine Age | mths | Client Info | 8 | --- | --- |
| Oil Age | mths | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.0601 | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|----------|--------|-------------|---------|----------|----------|-----|
| Iron | ppm | ASTM D5185m | >200 | 0 | --- | --- |
| Chromium | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Tin | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|-------------|---------|--------------|----------|-----|
| Boron | ppm | ASTM D5185m | 5 | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 5 | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 5 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 5 | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m | 5 | 2 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 250 | <1 | --- | --- |
| Zinc | ppm | ASTM D5185m | 5 | 3 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 3000 | 6 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|-------------|---------|--------------|----------|-----|
| Silicon | ppm | ASTM D5185m | >25 | <1 | --- | --- |
| Sodium | ppm | ASTM D5185m | >21 | 0 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |

FLUID CLEANLINESS





| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 2853 | --- | --- |
| Particles >6µm | ASTM D7647 | >10240000 | 301 | --- | --- |
| Particles >14µm | ASTM D7647 | >10240000 | 9 | --- | --- |
| Particles >21µm | ASTM D7647 | >2560000 | 4 | --- | --- |
| Particles >38µm | ASTM D7647 | >640000 | 0 | --- | --- |
| Particles >71µm | ASTM D7647 | >160000 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >--/30/30 | 19/15/10 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|------------------|----------|------------|---------|-------------|----------|-----|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.41 | 0.24 | --- | --- |



OIL ANALYSIS REPORT

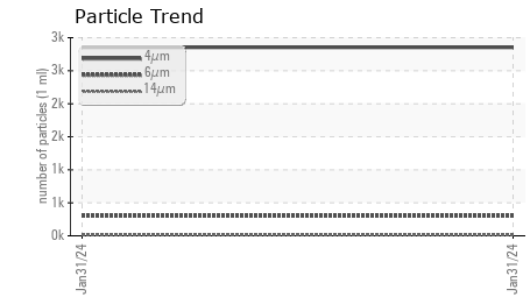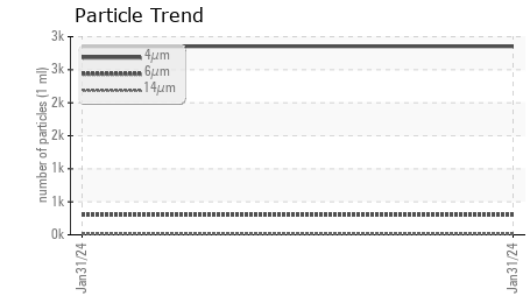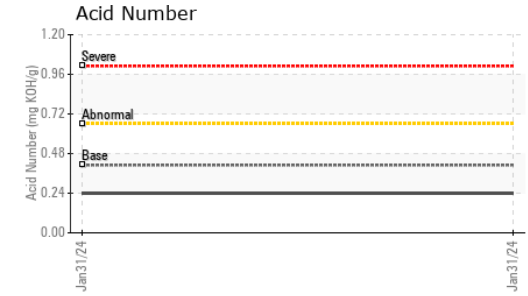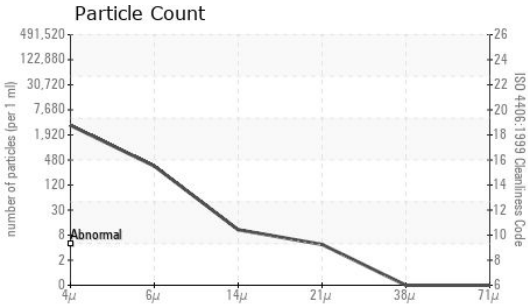


| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.0601 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 40°C | cSt | ASTM D445 | 100 | 18.6 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | |
|--------|--|----------|----------|
| Color | | no image | no image |
| Bottom | | no image | no image |

GRAPHS

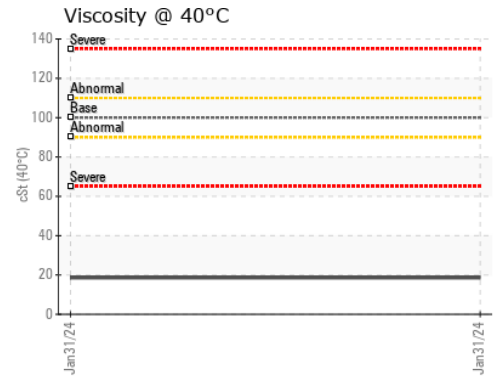

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0884805 **Received** : 01 Feb 2024
Lab Number : 06077649 **Diagnosed** : 05 Feb 2024
Unique Number : 10859740 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BEACON LUBRICANTS
 P.O. BOX 754
 EDINBORO, PA
 US 16412
 Contact: Brent Hulings
 purchasing@beaconlubricants.com
 T: (814)734-7535
 F: (814)734-3460