


## **OIL ANALYSIS REPORT**

### **Sample Rating Trend**







# TURBINE-1

Component

Turbine

**MOBIL SHC 824 (275 GAL)** 

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

1,2017 Mar2018 Jan2019 Nev2019 Sap2020 Jul2021 Mar2022 Mar2023						
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0850000	WC0745755	WC0745754
Sample Date		Client Info		29 Jan 2024	05 Oct 2023	02 Aug 2023
Machine Age	hrs	Client Info		11077	8049	6796
Oil Age	hrs	Client Info		67254	64226	62834
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.03	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>15	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	1
Lead	ppm	ASTM D5185m		2	0	0
Copper	ppm	ASTM D5185m	>5	2	0	<1
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		2	0	<1
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		<1	1	0
Phosphorus	ppm	ASTM D5185m		1077	1031	1024
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		17	15	11
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	0	<1
Potassium	ppm	ASTM D5185m	>20	3	0	0
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2570	1918	445
Particles >6µm		ASTM D7647	>1300	809	565	198
Particles >14µm		ASTM D7647	>160	48	19	24
Particles >21µm		ASTM D7647	>40	11	5	5
Particles >38µm		ASTM D7647	>10	0	2	0
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>20/17/14	19/17/13	18/16/11	16/15/12
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045 0.5

0.22

0.23



## OIL ANALYSIS REPORT

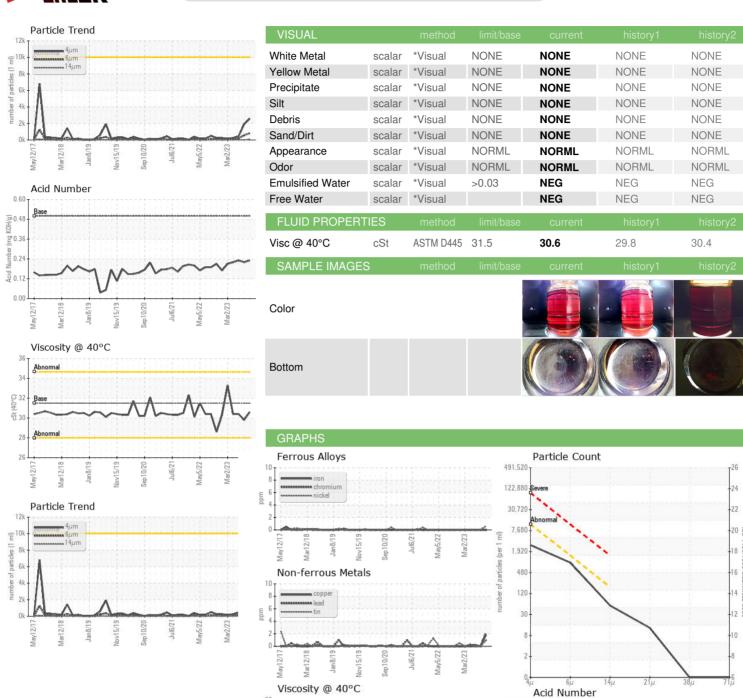





Certificate L2367

Laboratory Sample No. Lab Number

**Unique Number** Test Package

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0850000

: 06077655 : 10859746 : IND 2

: 01 Feb 2024 Recieved : 04 Feb 2024 Diagnosed

(B<sub>0.60</sub> 0.48 0.48

E 0.36 흗 0.24 ≥ 0.12

00.00 Pcid

Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

St (40°C) 32 30

28

26

**GREENE VALLEY LANDFILL** 

9 SOUTH 610 GREENE ROAD

NAPERVILLE, IL US 60565

Contact: CHRIS ADEN

caden@wm.com T: (630)743-4479 F: (630)983-1535

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)