


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

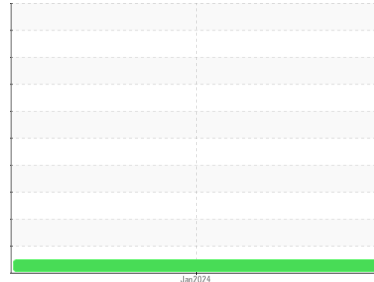

Area
EMPE
Machine Id
P210-15-1041
Component
Hydraulic System
Fluid
TULCO LUBSOIL SUPER HYDRAULIC AW 68 (200 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO5003293	---	---
Sample Date	Client Info		25 Jan 2024	---	---
Machine Age	hrs	Client Info	5550	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	1	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >20	<1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	<1	---	---
Lead	ppm	ASTM D5185m >20	3	---	---
Copper	ppm	ASTM D5185m >20	4	---	---
Tin	ppm	ASTM D5185m >20	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	70	---	---
Calcium	ppm	ASTM D5185m	71	---	---
Phosphorus	ppm	ASTM D5185m 425	329	---	---
Zinc	ppm	ASTM D5185m 500	418	---	---
Sulfur	ppm	ASTM D5185m 1900	1614	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	15	---	---
Sodium	ppm	ASTM D5185m	3	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---
Water	%	ASTM D6304 >0.05	0.008	---	---
ppm Water	ppm	ASTM D6304 >500	85	---	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	1747	---	---
Particles >6µm	ASTM D7647	>1300	634	---	---
Particles >14µm	ASTM D7647	>160	91	---	---
Particles >21µm	ASTM D7647	>40	21	---	---
Particles >38µm	ASTM D7647	>10	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	18/16/14	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.7	0.60	---	---

OIL ANALYSIS REPORT

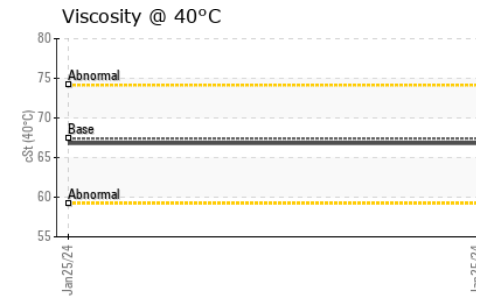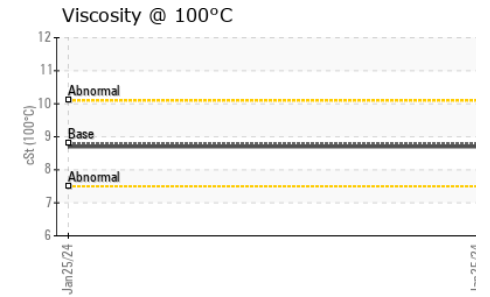
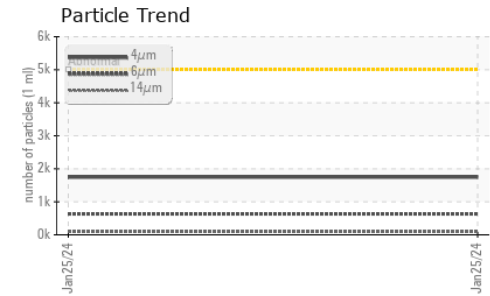
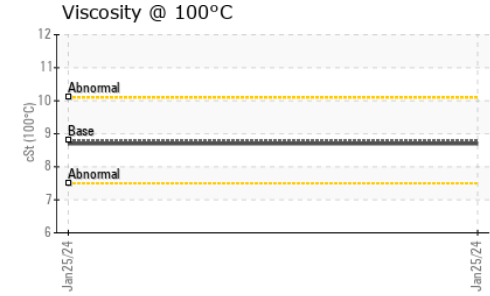
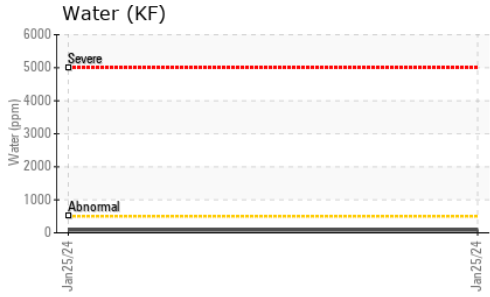


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67.4	66.8	---	---
Visc @ 100°C	cSt	ASTM D445	8.8	8.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	101	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

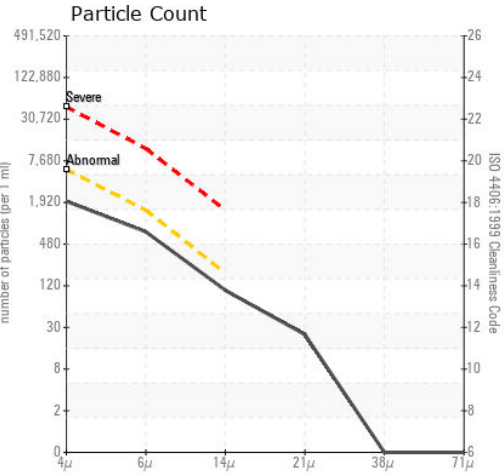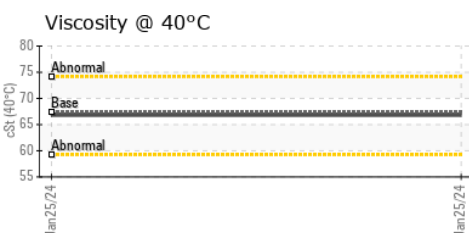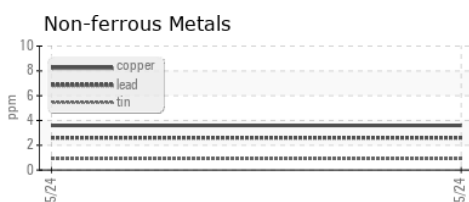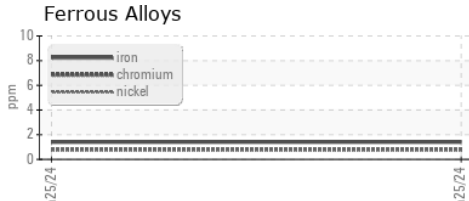

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO5003293 **Received** : 01 Feb 2024
Lab Number : 06077673 **Tested** : 02 Feb 2024
Unique Number : 10859764 **Diagnosed** : 04 Feb 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

JAMAK FABRICATION
 1401 NORTH BOWIE DRIVE
 WEATHERFORD, TX
 US 76086
 Contact: LARRY NORRIS
 lano@jamak.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)