


OIL ANALYSIS REPORT

Sample Rating Trend



WATER

Machine Id

KAESER SK 20 6795452 (S/N 1015)

Component

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		May201	9 May2020	Apr2021 Ja	n2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA008836	KCP28278	KCP26680
Sample Date		Client Info		25 Jan 2024	24 Apr 2021	01 May 2020
Machine Age	hrs	Client Info		16764	14146	6576
Oil Age	hrs	Client Info		0	3000	2000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	6	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	3	<1
Lead	ppm	ASTM D5185m	>10	2	0	0
Copper	ppm	ASTM D5185m	>50	4	3	15
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	1	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		2	0	<1
Magnesium	ppm	ASTM D5185m		2	<1	9
Calcium	ppm	ASTM D5185m		<1	0	0
Phosphorus	ppm	ASTM D5185m	500	214	113	55
Zinc	ppm	ASTM D5185m		206	73	149
Sulfur	ppm	ASTM D5185m		1587	1518	13147
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		3	0	3
Potassium	ppm	ASTM D5185m	>20	4	0	<1
Water	%	ASTM D6304	>0.05	<u> </u>	0.004	0.005
ppm Water	ppm	ASTM D6304	>500	2360	40.0	52.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3628	12862	83472
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u></u> 5732	△ 39407
Particles >14μm		ASTM D7647	>80	△ 336	△ 667	<u>▲</u> 1525
Particles >21µm		ASTM D7647	>20	<u> </u>	△ 93	<u>▲</u> 170
Particles >38μm		ASTM D7647	>4	<u> </u>	0	▲ 12
Particles >71µm		ASTM D7647	>3	<u>^</u> 2	0	<u> </u>
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	<u>^</u> 20/17	<u>22/18</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	4 O T 1 1 D 0 0 4 F				


0.336

0.65

0.317



OIL ANALYSIS REPORT

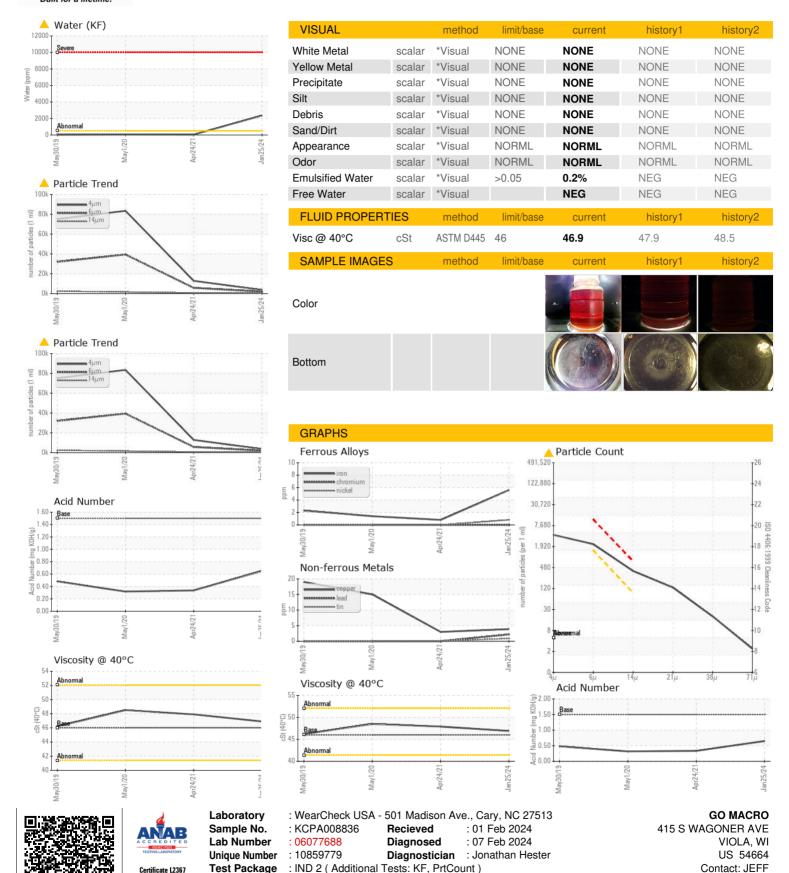

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

jeff@gomacro.com