




# OIL ANALYSIS REPORT

Sample Rating Trend

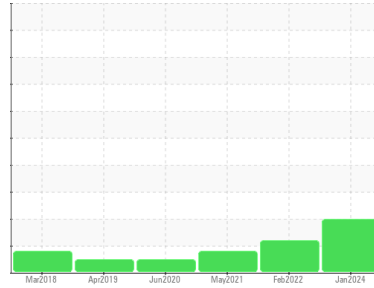

ISO



Machine Id  
**KAESER AS 30 6025844 (S/N 1004)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA011033</b>	KC95562	KC73217
Sample Date	Client Info		<b>24 Jan 2024</b>	15 Feb 2022	20 May 2021
Machine Age	hrs	Client Info	<b>37140</b>	25865	20686
Oil Age	hrs	Client Info	<b>0</b>	3000	3000
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ATTENTION

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>2</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>5</b>	8	10
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	<1	9
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>2</b>	0	0
Magnesium	ppm	ASTM D5185m 90	<b>1</b>	6	<1
Calcium	ppm	ASTM D5185m 2	<b>&lt;1</b>	0	0
Phosphorus	ppm	ASTM D5185m	<b>8</b>	8	5
Zinc	ppm	ASTM D5185m	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>11700</b>	11460	12374

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	1	3
Sodium	ppm	ASTM D5185m	<b>2</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>3</b>	0	0
Water	%	ASTM D6304 >0.05	<b>0.004</b>	0.004	0.008
ppm Water	ppm	ASTM D6304 >500	<b>45</b>	48.2	87.1

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>33970</b>	9109	4084
Particles >6µm	ASTM D7647 >1300		<b>▲ 10942</b>	▲ 3619	1135
Particles >14µm	ASTM D7647 >80		<b>▲ 808</b>	▲ 441	▲ 109
Particles >21µm	ASTM D7647 >20		<b>▲ 175</b>	▲ 91	▲ 37
Particles >38µm	ASTM D7647 >4		<b>▲ 6</b>	2	3
Particles >71µm	ASTM D7647 >3		<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13		<b>▲ 22/21/17</b>	▲ 19/16	▲ 17/14

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.44</b>	0.34	0.364

# OIL ANALYSIS REPORT


## ▲ Particle Trend

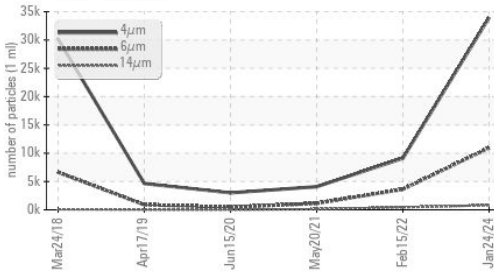


## Water (KF)

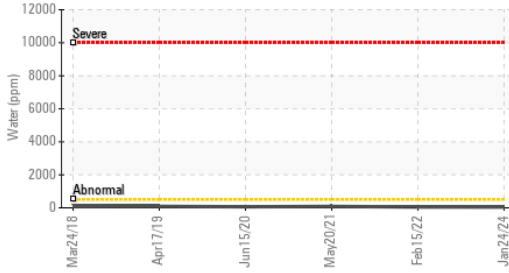


## Acid Number

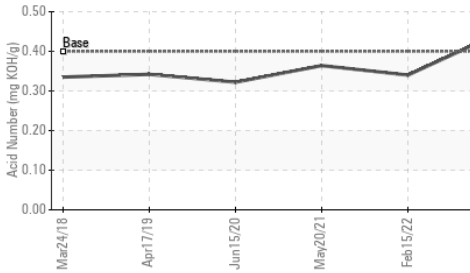

## Water (KF)

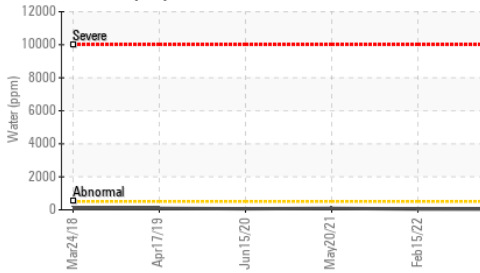

## Viscosity @ 40°C

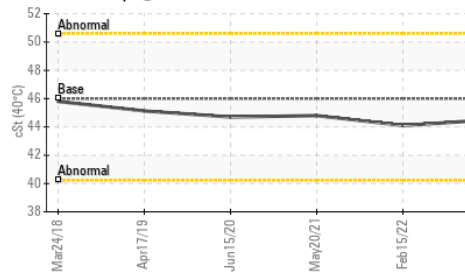


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	<b>44.5</b>	44.1	44.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color

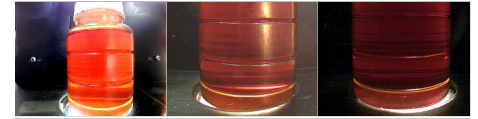


Bottom




## GRAPHS


### Ferrous Alloys

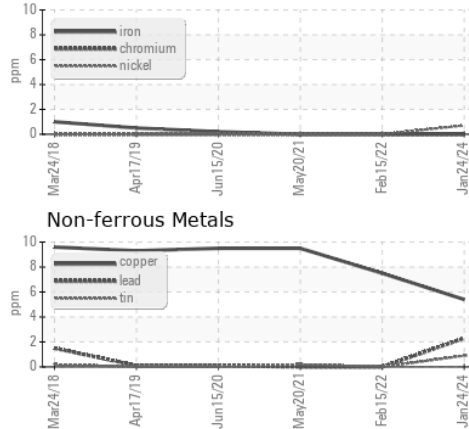


### Non-ferrous Metals

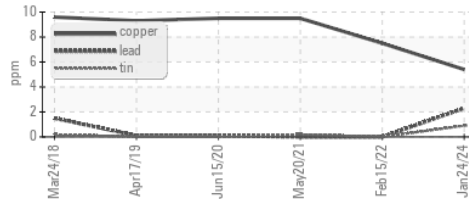


### Viscosity @ 40°C

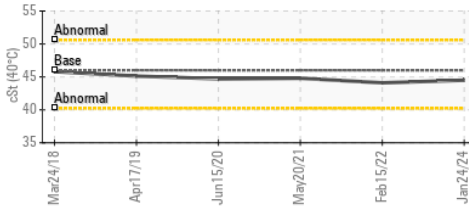

### ▲ Particle Count

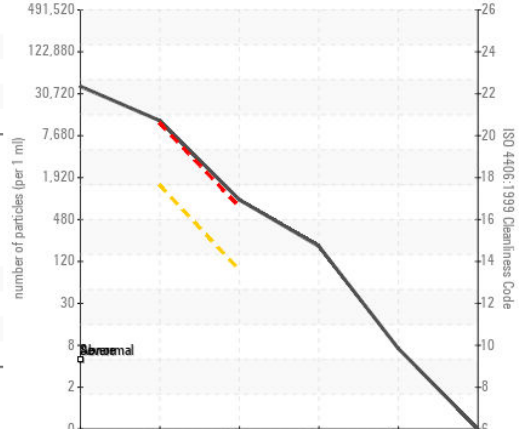

### Acid Number

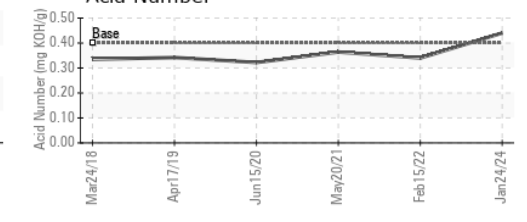

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA011033 **Received** : 01 Feb 2024  
**Lab Number** : 06077691 **Diagnosed** : 04 Feb 2024  
**Unique Number** : 10859782 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**ENGINEERED PLASTIC**  
 420 N UNIVERSAL BLVD  
 WHITEWATER, WI  
 US 53190  
 Contact: R. BOE  
 rboe@macleanfogg.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: