




# OIL ANALYSIS REPORT

Sample Rating Trend

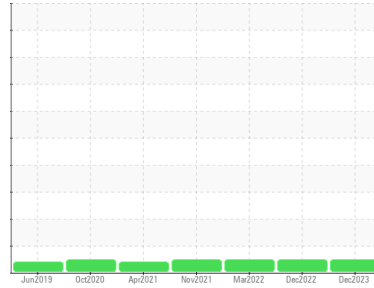

Machine Id  
**KAESER ASD 30 6607891 (S/N 1029)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KC126527</b>	KC108005	KC96174
Sample Date	Client Info	<b>27 Dec 2023</b>	06 Dec 2022	04 Mar 2022
Machine Age	hrs	<b>14083</b>	11161	9181
Oil Age	hrs	<b>0</b>	1899	1202
Oil Changed	Client Info	<b>N/A</b>	Changed	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>2</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>18</b>	14	5
Tin	ppm	ASTM D5185m >10	<b>1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>2</b>	0	0
Magnesium	ppm	ASTM D5185m 90	<b>1</b>	<1	<1
Calcium	ppm	ASTM D5185m 2	<b>&lt;1</b>	0	0
Phosphorus	ppm	ASTM D5185m	<b>2</b>	2	6
Zinc	ppm	ASTM D5185m	<b>35</b>	36	36

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>6</b>	7	4
Sodium	ppm	ASTM D5185m	<b>2</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	0
Water	%	ASTM D6304 >0.05	<b>0.003</b>	0.014	0.003
ppm Water	ppm	ASTM D6304 >500	<b>27</b>	140.4	38.2






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>890</b>	1951	2572
Particles >6µm	ASTM D7647 >1300	<b>218</b>	762	457
Particles >14µm	ASTM D7647 >80	<b>7</b>	15	32
Particles >21µm	ASTM D7647 >20	<b>2</b>	2	6
Particles >38µm	ASTM D7647 >4	<b>0</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	<b>17/15/10</b>	18/17/11	16/12

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.43</b>	0.45	0.47


# OIL ANALYSIS REPORT

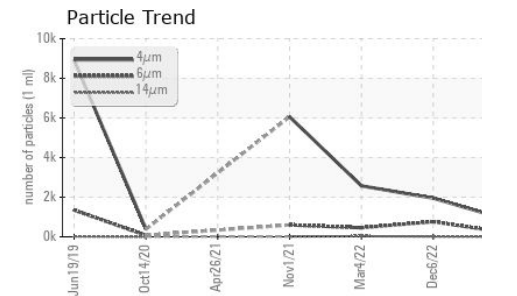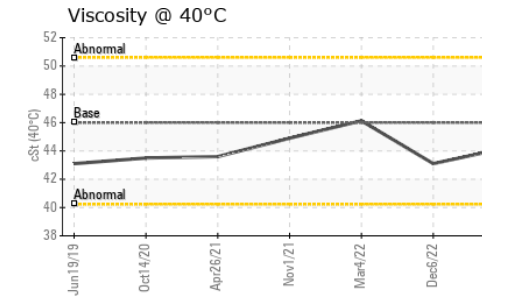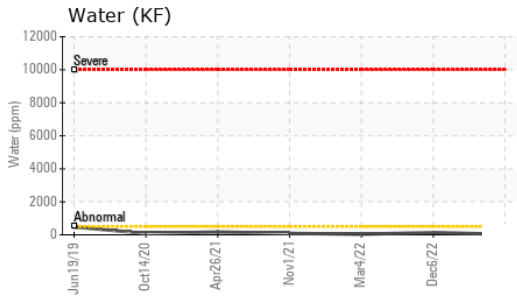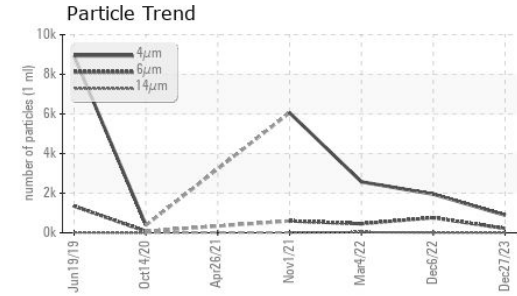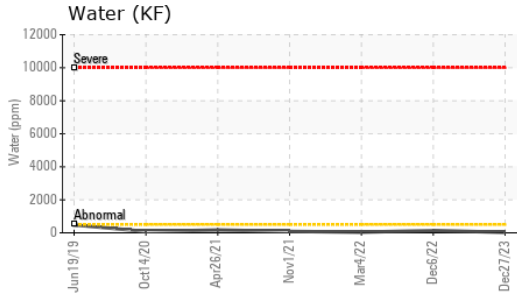






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.2	43.1	46.13

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

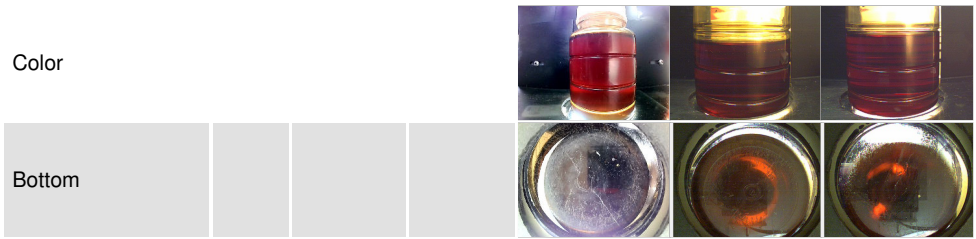

## GRAPHS

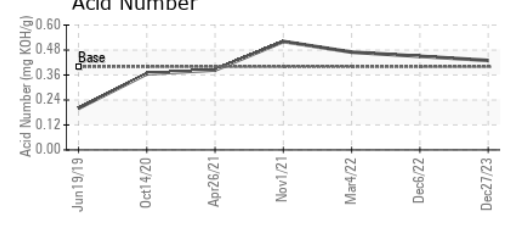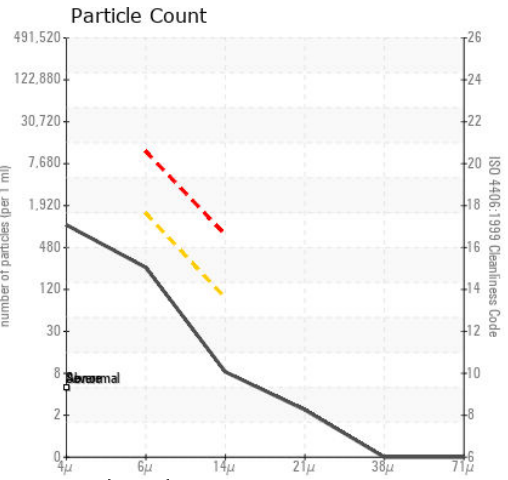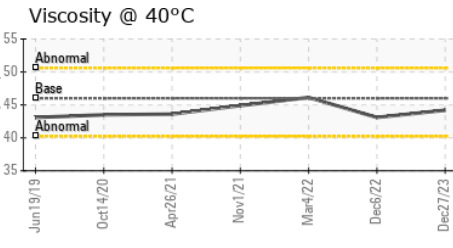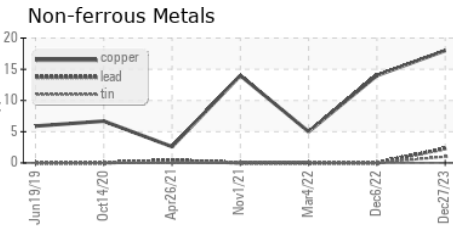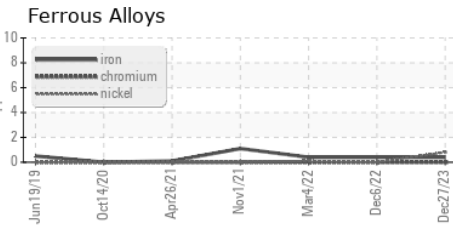

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC126527 **Received** : 01 Feb 2024  
**Lab Number** : 06077700 **Diagnosed** : 04 Feb 2024  
**Unique Number** : 10859791 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**ANSCO MACHINE CO**  
 60 CUYAHOGA FALLS INDUSTRIAL PKWY  
 PENINSULA, OH  
 US 44264  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: