

OIL ANALYSIS REPORT

ISO

KAESER SK 26 SIMPLEX 2172099 (S/N 1338)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SIS REPORT	Sample	Sample Rating Trend					
2099 (S/N 1338)	Jun 2005	Jun 2006 Jul 2007	Jun 2008	Jan 2024			
SAMPLE INFORMATION	method	limit/base	current	h	į		

Sample Number		Client Info		KCPA011067	KC16109	KC13991
Sample Date		Client Info		19 Jan 2024	17 Jun 2008	13 Jul 2007
Machine Age	hrs	Client Info		65028	19569	14888
Oil Age	hrs	Client Info		0	4700	4163
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	<1
Lead	ppm	ASTM D5185m	>25	2	0	0
Copper	ppm	ASTM D5185m	>50	15	36	14
Tin	ppm	ASTM D5185m	>15	<1	0	0
Antimony	ppm	ASTM D5185m			0	3
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		2	0	0
Magnesium	ppm	ASTM D5185m	90	1	0	2
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		<1	0	0
Zinc	ppm	ASTM D5185m		31	0	12
Sulfur	ppm	ASTM D5185m		17042	11613	14110
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	1
Sodium	ppm	ASTM D5185m		3	0	<1
Potassium	ppm	ASTM D5185m	>20	4	5	12
Water	%	ASTM D6304	>0.1	0.007	0.007	0.006
ppm Water	ppm	ASTM D6304	>1000	73		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		36634	28578	294
Particles >6µm		ASTM D7647	>1300	19923	<u>▲</u> 15567	160
Particles >14µm		ASTM D7647	>80	2616	<u>^</u> 2652	27
Particles >21µm		ASTM D7647	>20	499	▲ 895	9
Particles >38µm		ASTM D7647	>4	<u>^</u> 7	<u></u> 138	1
Particles >71μm		ASTM D7647	>3	0	<u> </u>	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/21/19</u>	<u>^</u> 21/19	14/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2


Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.362



OIL ANALYSIS REPORT

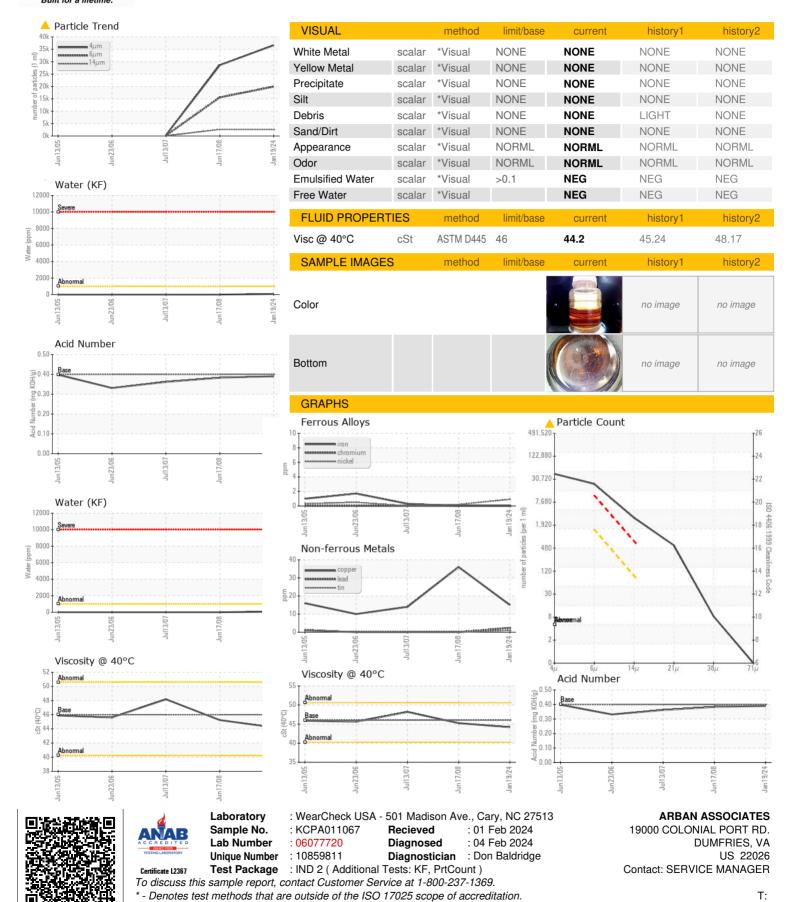

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: