




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR RIG 51-B GEN 1A (S/N 030955)**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL 10W40 (85 GAL)**

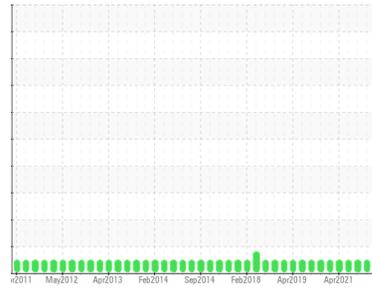

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0031791</b>	RP0022164	RP0022168
Sample Date	Client Info		<b>12 Jan 2024</b>	11 Sep 2022	08 Jun 2022
Machine Age	hrs	Client Info	<b>44270</b>	42594	41786
Oil Age	hrs	Client Info	<b>800</b>	811	817
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>0</b>	0	2
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>176</b>	453	340
Barium	ppm	ASTM D5185m 10	<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m 100	<b>61</b>	85	73
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>431</b>	350	311
Calcium	ppm	ASTM D5185m 3000	<b>1496</b>	1371	1488
Phosphorus	ppm	ASTM D5185m 1150	<b>837</b>	971	996
Zinc	ppm	ASTM D5185m 1350	<b>1021</b>	1185	1181

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	4	3
Sodium	ppm	ASTM D5185m	<b>0</b>	3	6
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	2
Water	%	ASTM D6304 >0.2	<b>NEG</b>	NEG	NEG






## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.2</b>	6.8	7.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.7</b>	21.8	21.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.0</b>	15.6	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.51</b>	6.79	6.29





# OIL ANALYSIS REPORT

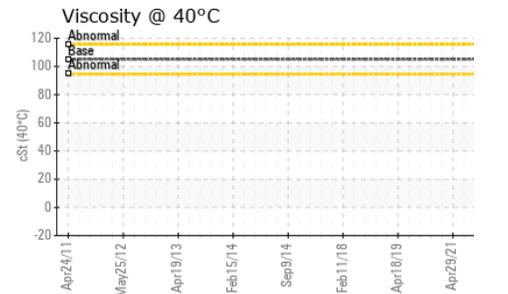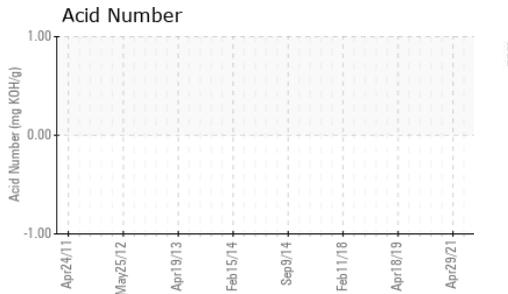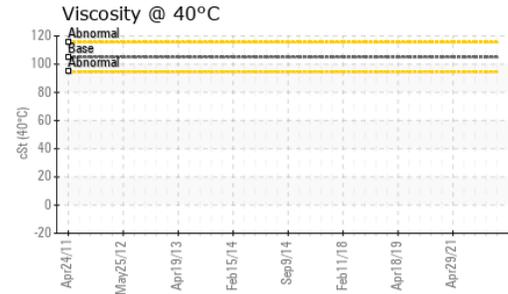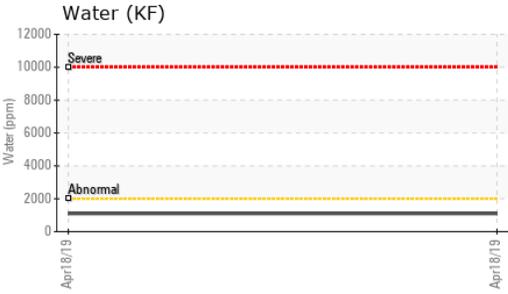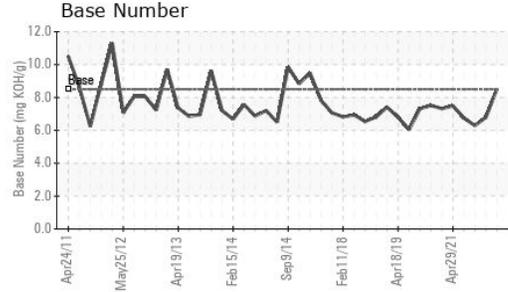

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	13.3

## GRAPHS

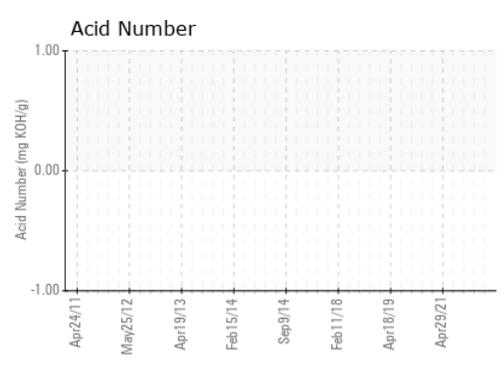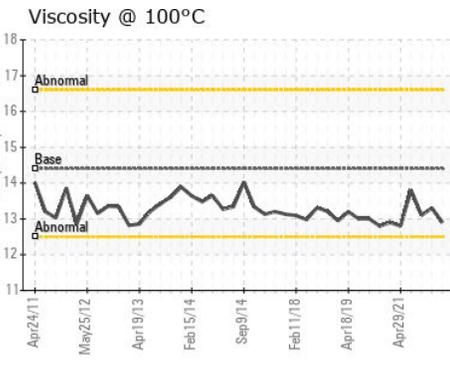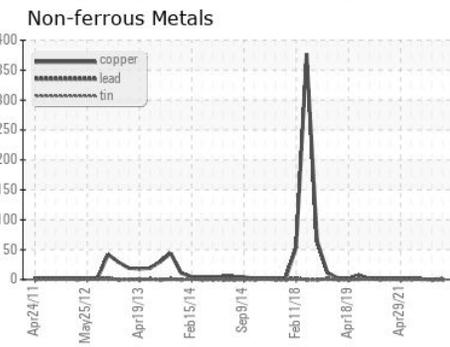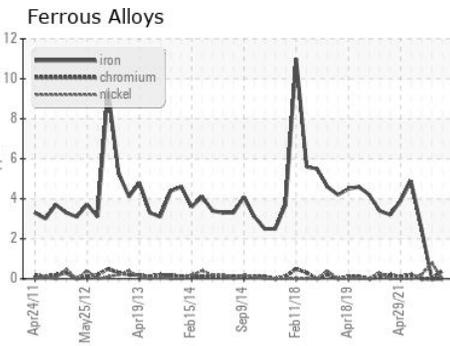

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0031791 **Received** : 01 Feb 2024  
**Lab Number** : 06077806 **Diagnosed** : 05 Feb 2024  
**Unique Number** : 10859897 **Diagnostician** : Sean Felton  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KV100, TBN )

**PARKER WELLBORE**  
 1110 UNIFAB RD  
 NEW IBERIA, LA  
 US 70560  
 Contact: BRENT CARLINE  
 brent.carline@parkerwellbore.com  
 T: (337)364-3122  
 F: (337)364-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)