




COOLANT REPORT

Sample Rating Trend

NORMAL



Area
KANSAS/15/EG - EXCAVATOR
 Machine Id
20.133L [KANSAS^15^EG - EXCAVATOR]
 Component
Coolant
 Fluid
EXTENDED LIFE COOLANT (--- GAL)

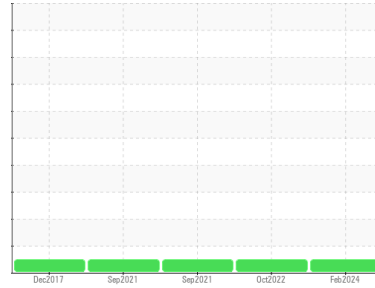

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The fluid is suitable for further service.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

Carboxylate test failed. The glycol level is acceptable. The pH level of this fluid is within the acceptable limits.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0862613	WC0673597	WC0621059
Sample Date	Client Info		14 Feb 2024	03 Oct 2022	27 Sep 2021
Machine Age	hrs	Client Info	7937	7472	7196
Oil Age	hrs	Client Info	0	7472	7196
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

PHYSICAL TEST RESULTS

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		1.068	1.068	---
pH	Scale 0-14	ASTM D1287	8.04	7.69	7.73
Nitrites	ppm	AP-053:2009	560	676	372
Reserve Alkalinity	Scale 0-20	*ASTM D1121	---	---	---
Percentage Glycol	%	ASTM D3321	50.3	50.2	50
Freezing Point	°F	ASTM D3321	-35	-35	-39
Boiling Point	°C	WC Method	225	---	---
Total Dissolved Solids			346.0	345.5	374.0
Carboxylate			fail	pass	fail

CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D6130	3	19	22
Phosphorus	ppm	ASTM D6130	1	0	0
Boron	ppm	ASTM D6130	0	3	0
Molybdenum	ppm	ASTM D6130	734	1124	1075

CORROSION

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D6130	>15	0	0	<1
Aluminum	ppm	ASTM D6130	>10	<1	<1	<1
Copper	ppm	ASTM D6130	>10	1	1	<1
Lead	ppm	ASTM D6130	>10	1	<1	0
Tin	ppm	ASTM D6130	>10	<1	<1	0
Zinc	ppm	ASTM D6130		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Chlorine	ppm	ASTM D6130		9	0	6

CARRIER SALTS


	method	limit/base	current	history1	history2	
Sodium	ppm	ASTM D6130		4401	4727	3464
Potassium	ppm	ASTM D6130		205	423	290







SCALE POTENTIAL

	method	limit/base	current	history1	history2	
Calcium	ppm	ASTM D6130		2	3	2
Magnesium	ppm	ASTM D6130		<1	1	2






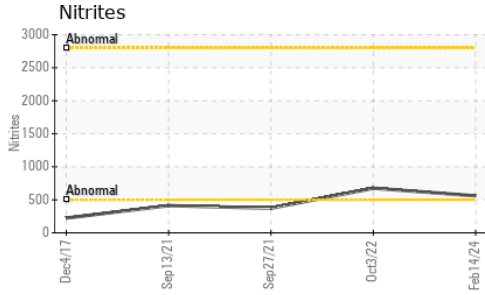


COOLANT REPORT



VISUAL	method	limit/base	current	history1	history2
Coolant Color	*Visual		Red	Pink	Red
Coolant Appearance	*Visual	Clear	normal	normal	normal
Color					
Bottom					

GRAPHS

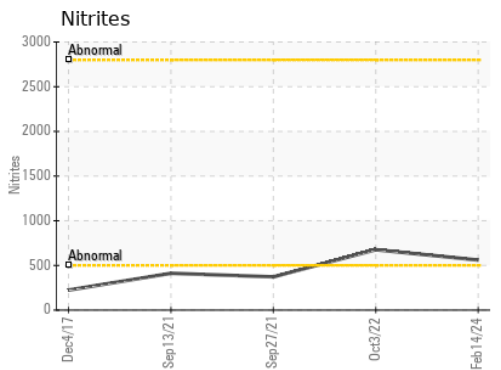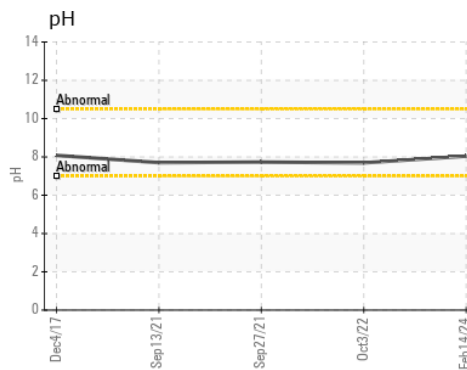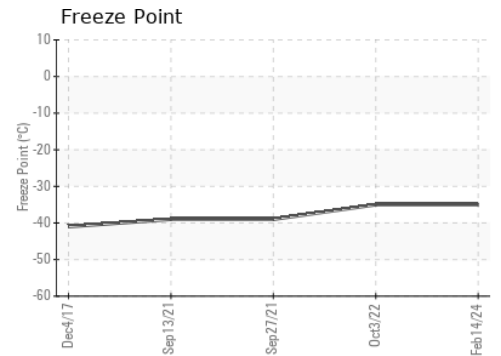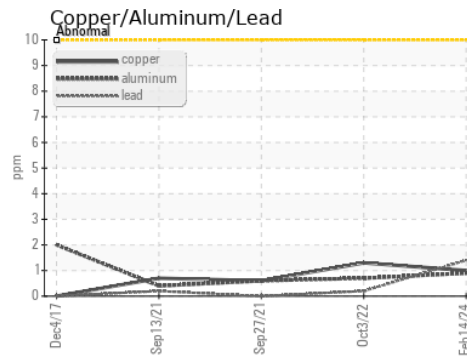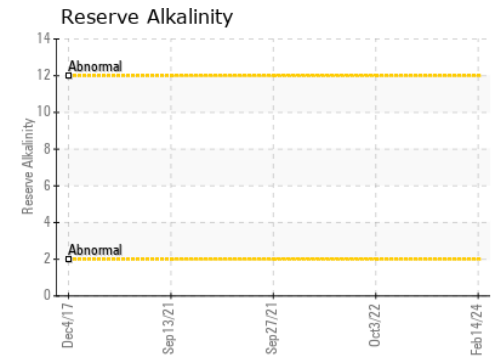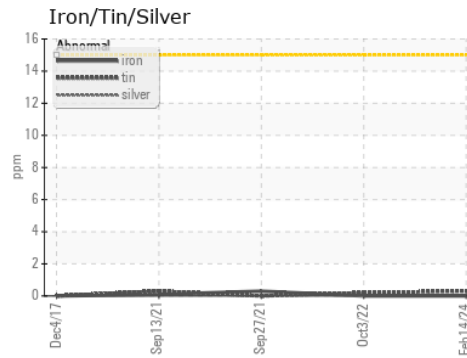

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0862613 **Received** : 22 Feb 2024
Lab Number : 06097355 **Tested** : 27 Feb 2024
Unique Number : 10890208 **Diagnosed** : 27 Feb 2024 - Jonathan Hester
Test Package : COOL- (Additional Tests: BoilingPoint, COOL, GlycolType, ICP)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)