




PROBLEM SUMMARY

Sample Rating Trend

WEAR




Machine Id
T1505
Component
Diesel Engine
Fluid
CHEVRON DELO 400 SDE SAE 15W40 (48 QTS)

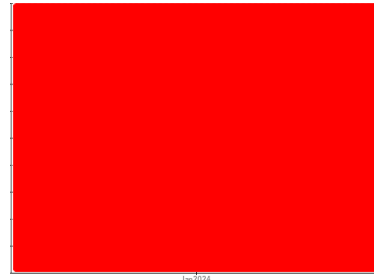


COMPONENT CONDITION SUMMARY

Non-ferrous Metals

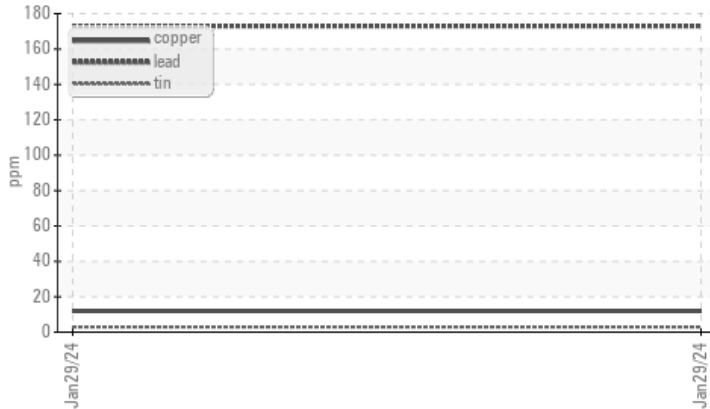

Ferrous Alloys

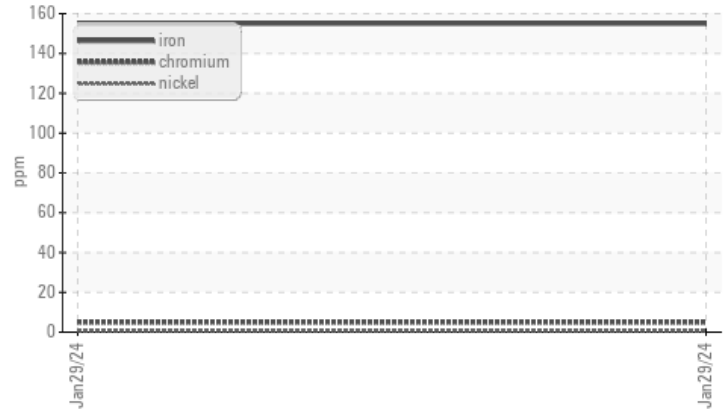

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Iron	ppm	ASTM D5185m	>80	155	---	---
Chromium	ppm	ASTM D5185m	>5	5	---	---
Lead	ppm	ASTM D5185m	>30	173	---	---

Customer Id: ERGNEW604
Sample No.: WC0876901
Lab Number: 06097507
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Inspect Wear Source	---	---	?	We advise that you inspect for the source(s) of wear.
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
T1505
Component
Diesel Engine
Fluid
CHEVRON DELO 400 SDE SAE 15W40 (48 QTS)

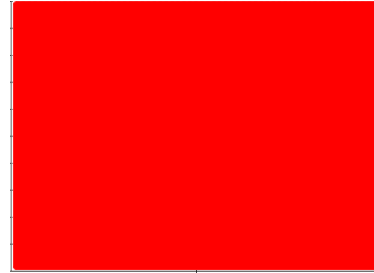

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Wear

Cylinder, crank, or cam shaft wear is indicated. Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0876901	---	---
Sample Date	Client Info		29 Jan 2024	---	---
Machine Age	mls	Client Info	388516	---	---
Oil Age	mls	Client Info	30000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	155	---	---
Chromium	ppm	ASTM D5185m >5	5	---	---
Nickel	ppm	ASTM D5185m >2	<1	---	---
Titanium	ppm	ASTM D5185m	2	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >30	17	---	---
Lead	ppm	ASTM D5185m >30	173	---	---
Copper	ppm	ASTM D5185m >150	12	---	---
Tin	ppm	ASTM D5185m >5	3	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	118	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	175	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	941	---	---
Calcium	ppm	ASTM D5185m	2190	---	---
Phosphorus	ppm	ASTM D5185m 760	1025	---	---
Zinc	ppm	ASTM D5185m 800	1274	---	---
Sulfur	ppm	ASTM D5185m 3000	2894	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	13	---	---
Sodium	ppm	ASTM D5185m	5	---	---
Potassium	ppm	ASTM D5185m >20	19	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	16.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	33.1	---	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	32.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10	7.1	---	---




OIL ANALYSIS REPORT


Non-ferrous Metals

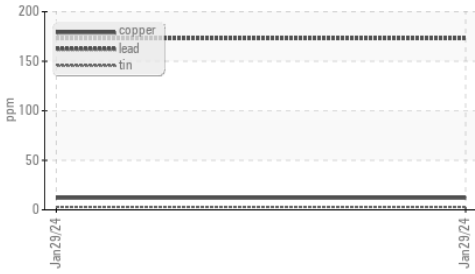


Ferrous Alloys

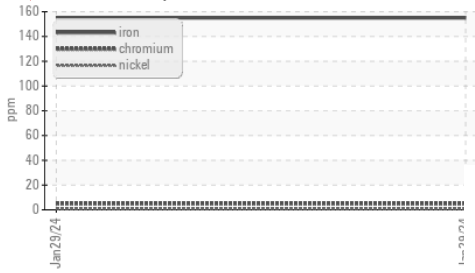

Base Number

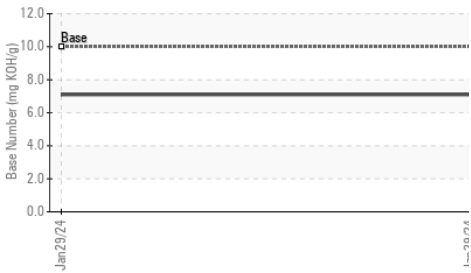

Viscosity @ 100°C

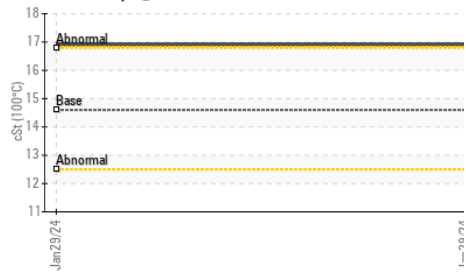


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.6	16.9	---

GRAPHS

Ferrous Alloys

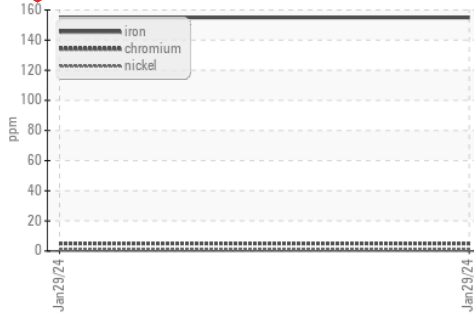


Non-ferrous Metals

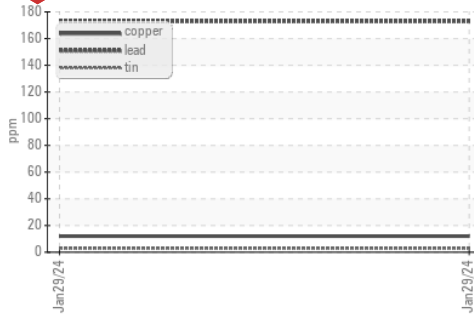

Viscosity @ 100°C



Base Number

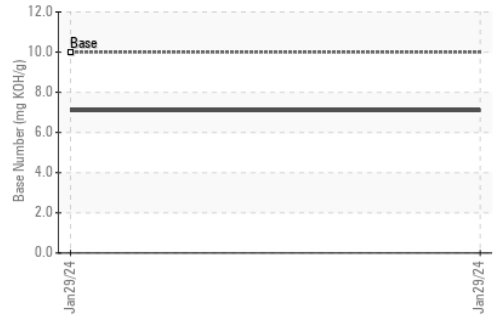

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876901 **Received** : 22 Feb 2024
Lab Number : **06097507** **Tested** : 23 Feb 2024
Unique Number : 10890360 **Diagnosed** : 24 Feb 2024 - Don Baldrige
Test Package : FLEET

Ergon Trucking Inc. - NEW604
 2567 Congo Arroyo
 Newell, WV
 US 26050
 Contact: JASON JULIAN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: