




OIL ANALYSIS REPORT

Sample Rating Trend

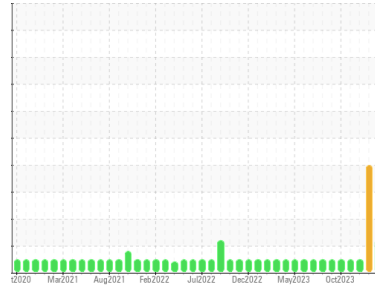

ISO



Area
FLAKER
Machine Id
LINE 1 FLAKER INFEED HPU Reservoir (S/N FL105H20T)
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0834621	WC0782988	WC0834683
Sample Date	Client Info	19 Feb 2024	19 Jan 2024	18 Dec 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	0	0	0
Chromium	ppm ASTM D5185m >20	<1	0	0
Nickel	ppm ASTM D5185m >20	0	0	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >20	0	0	0
Lead	ppm ASTM D5185m >20	0	0	0
Copper	ppm ASTM D5185m >20	0	<1	<1
Tin	ppm ASTM D5185m >20	0	0	0
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 5	<1	<1	0
Barium	ppm ASTM D5185m 5	0	0	0
Molybdenum	ppm ASTM D5185m 5	0	<1	<1
Manganese	ppm ASTM D5185m	0	<1	0
Magnesium	ppm ASTM D5185m 25	6	6	2
Calcium	ppm ASTM D5185m 200	66	66	61
Phosphorus	ppm ASTM D5185m 300	336	317	331
Zinc	ppm ASTM D5185m 370	444	412	416
Sulfur	ppm ASTM D5185m 2500	834	760	815

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	0	0	0
Sodium	ppm ASTM D5185m	<1	1	<1
Potassium	ppm ASTM D5185m >20	0	0	0

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >640	▲ 1064	● 16162	214
Particles >6µm	ASTM D7647 >160	▲ 291	● 3728	66
Particles >14µm	ASTM D7647 >20	13	▲ 45	5
Particles >21µm	ASTM D7647 >4	4	5	2
Particles >38µm	ASTM D7647 >3	1	0	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >16/14/11	▲ 17/15/11	● 21/19/13	15/13/10


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.57	0.24	0.21	0.23




OIL ANALYSIS REPORT


Particle Trend

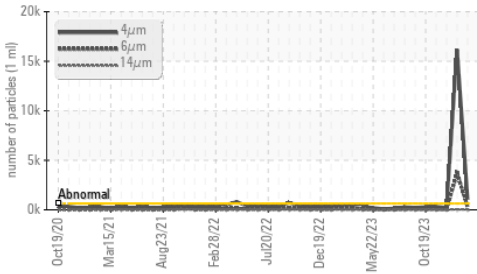


Particle Trend

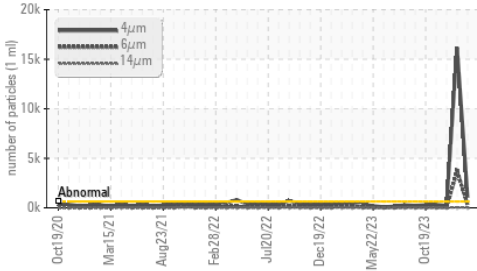

Acid Number

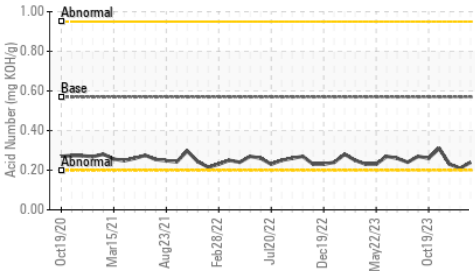

Viscosity @ 40°C

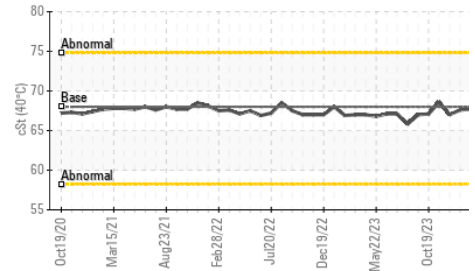

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	67.7	67.6	67.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

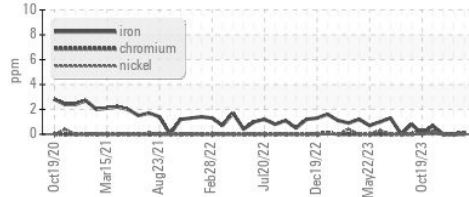


Non-ferrous Metals

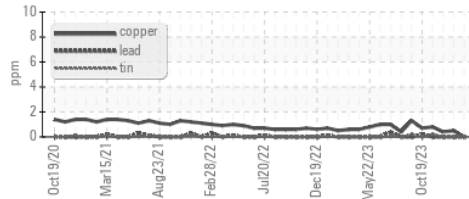


Viscosity @ 40°C

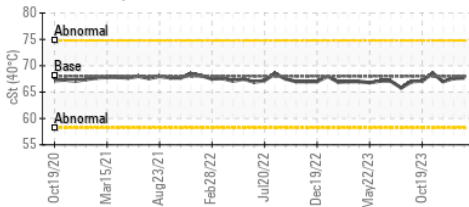

Particle Count

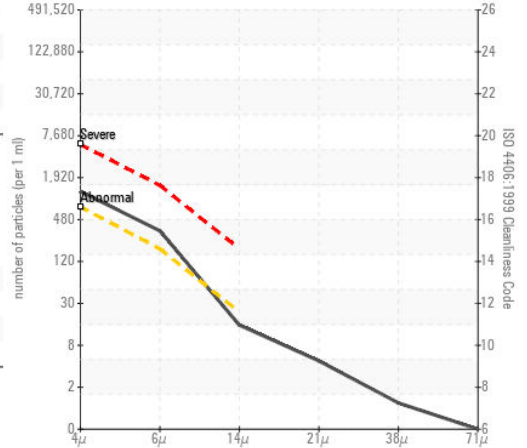

Acid Number

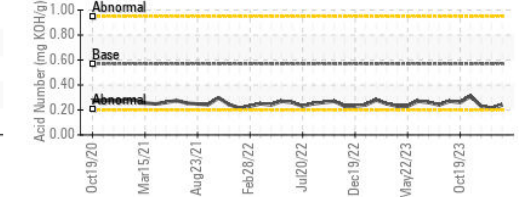

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0834621
 Lab Number : 06097644
 Unique Number : 10890497
 Test Package : IND 2

Received : 22 Feb 2024
 Tested : 23 Feb 2024
 Diagnosed : 23 Feb 2024 - Wes Davis

J.M. Huber Corporation
 PO BOX 38
 CRYSTAL HILL, VA
 US 24539
 Contact: Ted Hudson
 ted.hudson@huber.com
 T: (434)476-6628
 F: (434)476-8133

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)