

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Machine Id **350 (S/N 246969)** Component

Hydraulic System Fluid MOBIL DTE EXCEL ISO 46 (95 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

📥 Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0886737	WC0784137	
Sample Date		Client Info		15 Feb 2024	21 Aug 2023	
Machine Age	hrs	Client Info		22970	0	
Oil Age	hrs	Client Info		22970	0	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	3 6	3 1	
Chromium	ppm	ASTM D5185m	>20	<1	<1	
Nickel	ppm	ASTM D5185m	>20	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	
Lead	ppm	ASTM D5185m	>20	0	0	
		ASTM D5185m	>20	4	4	
Copper Tin	ppm	ASTM D5185m	>20	4	4	
	ppm		>20	-		
Vanadium Cadmium	ppm ppm	ASTM D5185m ASTM D5185m		0	0	
ADDITIVES	ppm	method	limit/base	current	history1	history2
			IIIII Dase		0	
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1	0	
Molybdenum	ppm	ASTM D5185m		0	<1	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		<1	0	
Calcium	ppm	ASTM D5185m		94	112	
Phosphorus	ppm	ASTM D5185m		372	422	
Zinc	ppm	ASTM D5185m		518	597	
Sulfur	ppm	ASTM D5185m		6068	7622	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	2	
Sodium	ppm	ASTM D5185m		3	3	
Potassium	ppm	ASTM D5185m	>20	0	<1	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	333		
Particles >6µm		ASTM D7647	>1300	80		
Particles >14µm		ASTM D7647	>160	9		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>20/17/14	16/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.75	0.69	

Contact/Location: service managear - AMPROC



OIL ANALYSIS REPORT

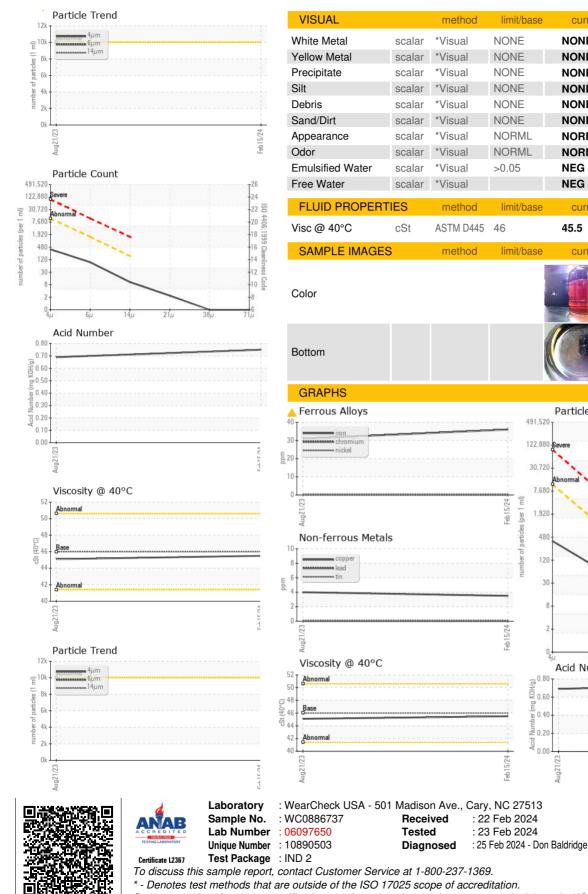

ALLIANCE PRECISION PLASTICS 1220 LEE RD ROCHESTER, NY US 14606 Contact: service managear

214

history1

NONE

NONE

NONE

NONE

MODER

NONE

NORML

NORML

history

historv1

裔

NFG

NEG

45.1

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

curren

current

Particle Count

Acid Number

7.68

1.920

480

120

31

0.40

0.20

0.00

NEG

NEG

45.5

history2

history

history2

no image

no image

4406

:1999 Cle

14

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (716)425-7251

Contact/Location: service managear - AMPROC

T: