

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

41-42-43 Component Hydraulic System Fluid {not provided} (--- GAL)

#### DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## Wear

All component wear rates are normal.

# Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

# Particle Filter (Magn: 200 x)



SAMPLE INFORM	<u>ATION</u>	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0003244		
Sample Date		Client Info		13 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		18		
Phosphorus	ppm	ASTM D5185m		279		
Zinc	ppm	ASTM D5185m		203		
Sulfur	ppm	ASTM D5185m		716		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>		
Particles >6µm		ASTM D7647	>2500	923		
Particles >14µm		ASTM D7647	>320	92		
Particles >21µm		ASTM D7647	>80	24		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>21/17/14</b>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.31		

Report Id: NIPLAN [WUSCAR] 06097657 (Generated: 06/24/2024 12:05:01) Rev: 1

Contact/Location: MIKE GUTYAN - NIPLAN Page 1 of 2



491,52 122 88

Ê 30,720

number of particles (per 1

7 68

1.92 480

120

30

8

14 <sub>官</sub>12k

10k mber of particles (1 8k

6k

41 2 0

0.40

(B/HO)

-B 0.10 0.00

65

60


5 

4(

35

ŝ 45

# **OIL ANALYSIS REPORT**

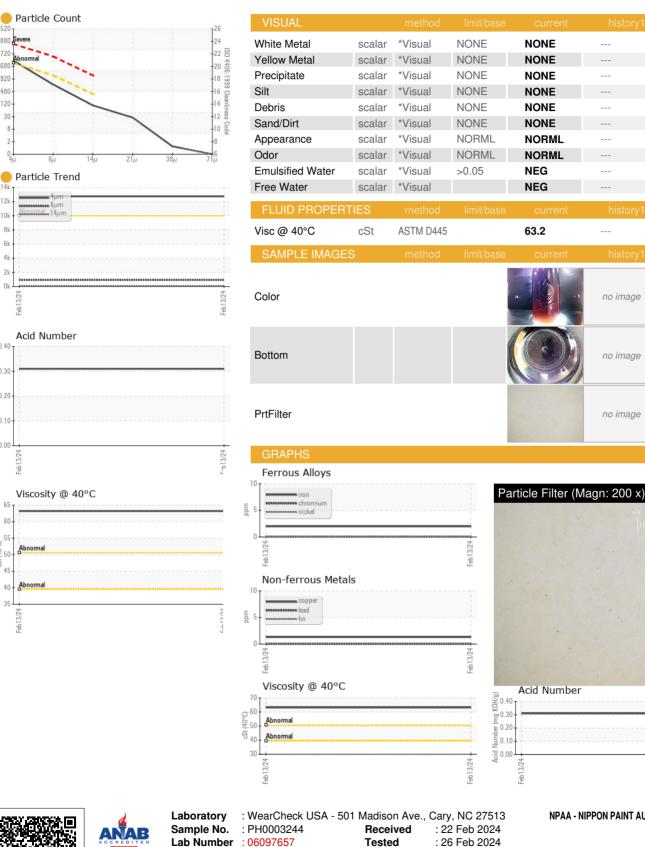

NPAA - NIPPON PAINT AUTOMOTIVE AMERICAS 2701 E 170TH ST LANSING, IL : 26 Feb 2024 - Jonathan Hester US 60438 Contact: MIKE GUTYAN wcgfldemo@gmail.com T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Report Id: NIPLAN [WUSCAR] 06097657 (Generated: 06/24/2024 12:05:01) Rev: 1

Certificate 12367

Unique Number : 10890510

Test Package : PLANT (Additional Tests: PrtFilter)

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Diagnosed

Contact/Location: MIKE GUTYAN - NIPLAN

no image

no image

no image

no imade

no imade

no image

3/24 eb1