

## **OIL ANALYSIS REPORT**

# Area MS-103 B38374 - AIR COMPRESSOR #7 100 HP SCREW INGERSOLL-RAND (S/N FF1411U98049)

Component Compressor Fluid

INGERSOLL-RAND SSR ULTRA COOLANT (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

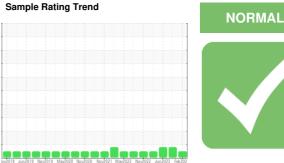




SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0894906	WC0826167	WC0799682
Sample Date		Client Info		18 Feb 2024	20 Aug 2023	06 Jun 2023
Machine Age	hrs	Client Info		127121	125202	123747
Oil Age	hrs	Client Info		9945	9000	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	2	1
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	500	872	811	867
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	2	3	2
Calcium	ppm	ASTM D5185m	0	3	4	5
Phosphorus	ppm	ASTM D5185m	20	2	3	<1
Zinc	ppm	ASTM D5185m	0	2	12	11
Sulfur	ppm	ASTM D5185m	200	371	442	416
CONTAMINANTS	8	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	<1
Sodium	ppm	ASTM D5185m		13	32	25
Potassium	ppm	ASTM D5185m	>20	2	4	4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	490		
Particles >6µm		ASTM D7647	>2500	168		
Particles >14µm		ASTM D7647	>320	25		
Particles >21µm		ASTM D7647	>80	8		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/15/12		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.30	0.647	0.45
				• • • • •		


Report Id: HORAUS [WUSCAR] 06097665 (Generated: 02/25/2024 10:15:35) Rev: 1


Contact/Location: RYAN LOWE - HORAUS




## **OIL ANALYSIS REPORT**

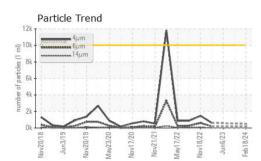

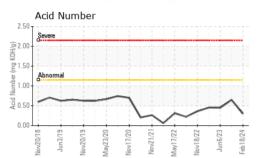






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	🔺 MODER	A MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.4	53.3	54.6	54.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

Bottom

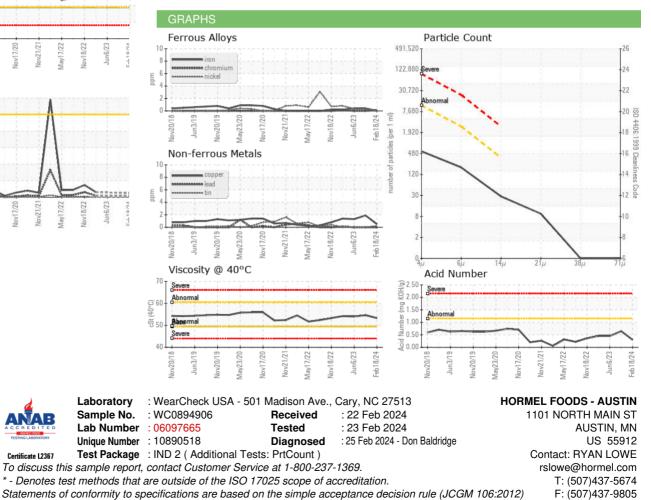

Certificate L2367

Contact/Location: RYAN LOWE - HORAUS