


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



MS-103

B38375 - COMPRESSOR AIR ROTARY SCREW INGERSOLL RAND SSR-EPE100-25 #6 (S/N FF1412U98050)

Component

Compressor Fluid

INGERSOLL-RAND SSR ULTRA COOLANT (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

(GAL)		lov2018 Jun201	19 Nov2019 May2020 Nov20	120 Aug ² 021 Feb ² 022 Aug ² 022 Ju	m2023 Feb202	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0894904	WC0826186	WC0814186
Sample Date		Client Info		18 Feb 2024	20 Aug 2023	06 Jun 2023
Machine Age	hrs	Client Info		94542	191397	189885
Oil Age	hrs	Client Info		9466	6321	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	500	775	789	909
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	<1	<1	0
Calcium	ppm	ASTM D5185m	0	5	4	2
Phosphorus	ppm	ASTM D5185m	20	1	2	0
Zinc	ppm	ASTM D5185m	0	0	3	<1
Sulfur	ppm	ASTM D5185m	200	358	358	340
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	2	2
Sodium	ppm	ASTM D5185m		34	30	16
Potassium	ppm	ASTM D5185m	>20	2	3	2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	366	978	646
Particles >6μm		ASTM D7647	>2500	108	279	209
Particles >14μm		ASTM D7647	>320	18	78	27
Particles >21μm		ASTM D7647	>80	4	31	9
Particles >38µm		ASTM D7647	>20	1	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/14/11	17/15/13	17/15/12
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Aoid Number (AN)	ma I/OII/-	ACTM DODAE		0.541	0.20	0.01

Acid Number (AN)


mg KOH/g ASTM D8045


0.39


0.21




OIL ANALYSIS REPORT









VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

1 LOID I HOI LITTILO		memou			HISTORY	riistoryz	
Visc @ 40°C	cSt	ASTM D445	49.4	54.1	52.5	52.2	


	GES

Color

Bottom





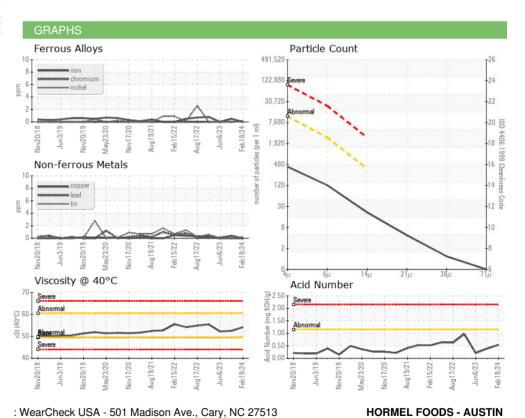





Laboratory Sample No. Lab Number : 06097666 Unique Number: 10890519

: WC0894904

Received **Tested**

Diagnosed

: 23 Feb 2024

: 22 Feb 2024

: 25 Feb 2024 - Don Baldridge

US 55912 Contact: RYAN LOWE rslowe@hormel.com

T: (507)437-5674 F: (507)437-9805

1101 NORTH MAIN ST

Certificate L2367

Test Package: IND 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AUSTIN, MN