

# **OIL ANALYSIS REPORT**



**VIS DEBRIS** 



# 6829016 (S/N 1006)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### Wear

All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Ap	2021	Jun 2023 Feb 202	14	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011766	KCPA002174	KCP36808
Sample Date		Client Info		09 Feb 2024	19 Jun 2023	05 Apr 2021
Machine Age	hrs	Client Info		8640	7555	4400
Oil Age	hrs	Client Info		0	0	0
Oil Changed	1113	Client Info		N/A	N/A	Changed
Sample Status		Oliciti IIIIo		ABNORMAL	ABNORMAL	ABNORMAL
·				-		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	2	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	34	0	10
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	100	72	35	57
Calcium	ppm	ASTM D5185m	0	4	0	0
Phosphorus	ppm	ASTM D5185m	0	2	0	<1
Zinc	ppm	ASTM D5185m	0	6	11	0
Sulfur	ppm	ASTM D5185m	23500	18627	22216	18275
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	2	1
Sodium	ppm	ASTM D5185m			0	0
Potassium	le le	710 TW DO TOOTH		16	8	9
Folassium	ppm	ASTM D5185m	>20	16 2	2	4
Water			>0.05			-
	ppm	ASTM D5185m		2	2	4
Water	ppm % ppm	ASTM D5185m ASTM D6304	>0.05	2 0.021	2 0.010	4 0.016
Water ppm Water	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304	>0.05 >500	2 0.021 214	2 0.010 100.3	4 0.016 168.8
Water ppm Water FLUID CLEANLIN	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method	>0.05 >500 limit/base	2 0.021 214	2 0.010 100.3 history1	4 0.016 168.8 history2
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	2 0.021 214 current	2 0.010 100.3 history1 11446	4 0.016 168.8 history2
Water ppm Water  FLUID CLEANLIN Particles >4µm Particles >6µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	2 0.021 214 current	2 0.010 100.3 history1 11446 • 3400	4 0.016 168.8 history2
Water ppm Water  FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	2 0.021 214 current	2 0.010 100.3 history1 11446 3400 226	4 0.016 168.8 history2
Water ppm Water  FLUID CLEANLIN  Particles >4μm  Particles >6μm  Particles >14μm  Particles >21μm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	2 0.021 214 current 	2 0.010 100.3 history1 11446 3400 226 54	4 0.016 168.8 history2
Water ppm Water  FLUID CLEANLIN  Particles >4μm  Particles >6μm  Particles >14μm  Particles >21μm  Particles >38μm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	2 0.021 214 current  	2 0.010 100.3 history1 11446	4 0.016 168.8 history2
Water ppm Water  FLUID CLEANLIN  Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	2 0.021 214 current 	2 0.010 100.3  history1 11446  3400  226  54 2 0	4 0.016 168.8 history2  




# **OIL ANALYSIS REPORT**








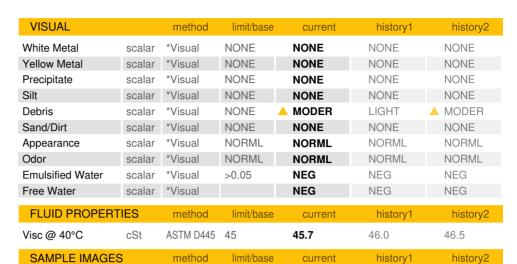



Color







## **GRAPHS**













Report Id: NPSSPA [WUSCAR] 06097672 (Generated: 02/25/2024 10:30:42) Rev: 1

Laboratory Sample No. Lab Number Unique Number: 10890525

: KCPA011766 : 06097672

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

**Tested** Diagnosed

: 22 Feb 2024 : 25 Feb 2024

: 25 Feb 2024 - Don Baldridge

1400 KLEPPE LN SPARKS, NV US 89431 Contact: R. DENTON rdenton@npsgglobal.com

**NPSG GLOBAL LLC** 

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: