




OIL ANALYSIS REPORT

Sample Rating Trend

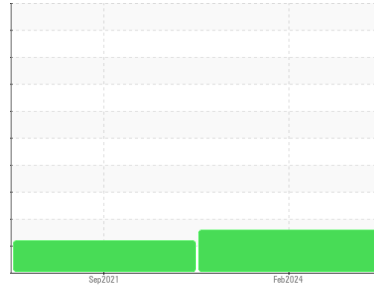

WATER



Machine Id
KAESER 3416719 (S/N 1391)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA011614	KCP36415	---
Sample Date	Client Info			12 Feb 2024	22 Sep 2021	---
Machine Age	hrs	Client Info		24625	20592	---
Oil Age	hrs	Client Info		0	1483	---
Oil Changed	Client Info			N/A	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>3	0	0	---
Titanium	ppm	ASTM D5185m	>3	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	<1	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>50	3	2	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Antimony	ppm	ASTM D5185m		---	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	9	---
Barium	ppm	ASTM D5185m	90	2	2	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	100	23	74	---
Calcium	ppm	ASTM D5185m	0	2	<1	---
Phosphorus	ppm	ASTM D5185m	0	2	6	---
Zinc	ppm	ASTM D5185m	0	<1	6	---
Sulfur	ppm	ASTM D5185m	23500	18663	17750	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	14	---
Sodium	ppm	ASTM D5185m		6	12	---
Potassium	ppm	ASTM D5185m	>20	0	1	---
Water	%	ASTM D6304	>0.05	▲ 0.093	0.019	---
ppm Water	ppm	ASTM D6304	>500	▲ 930	197.5	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1153	7960	---
Particles >6µm		ASTM D7647	>1300	209	▲ 1909	---
Particles >14µm		ASTM D7647	>80	11	▲ 183	---
Particles >21µm		ASTM D7647	>20	4	▲ 67	---
Particles >38µm		ASTM D7647	>4	1	4	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	17/15/11	▲ 18/15	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36	0.380	---


OIL ANALYSIS REPORT

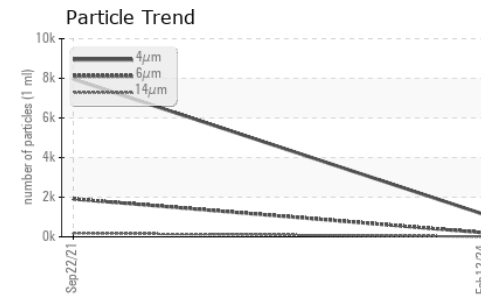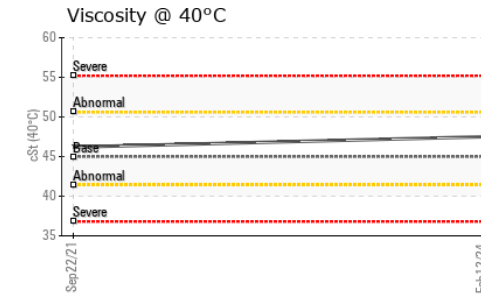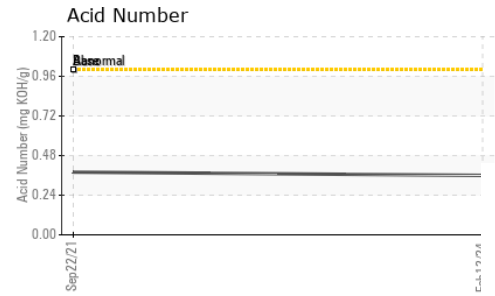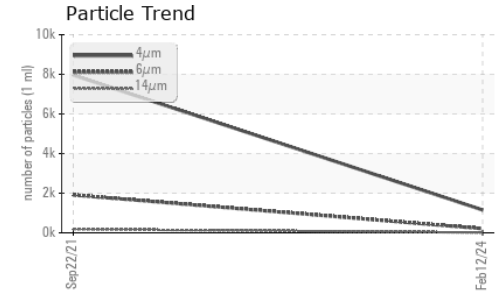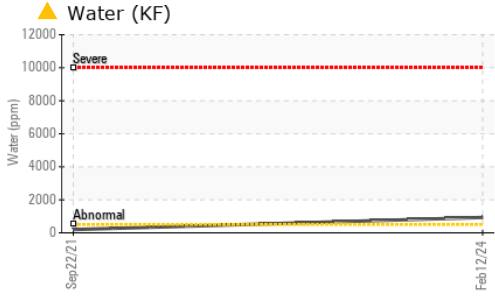






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	0.2%	NEG
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.5	46.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

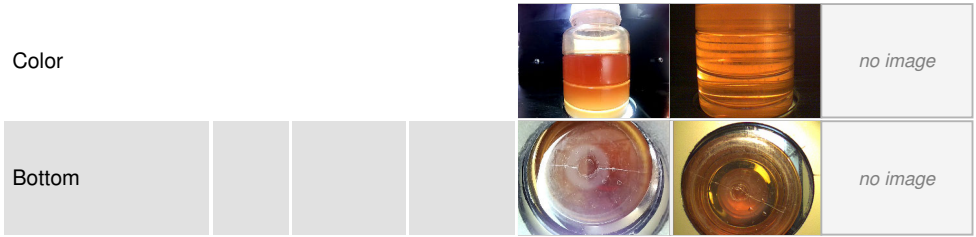

GRAPHS

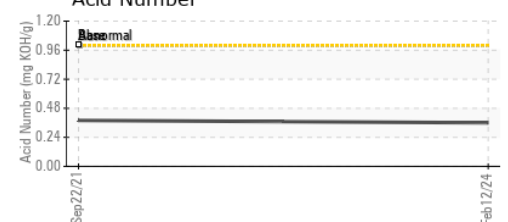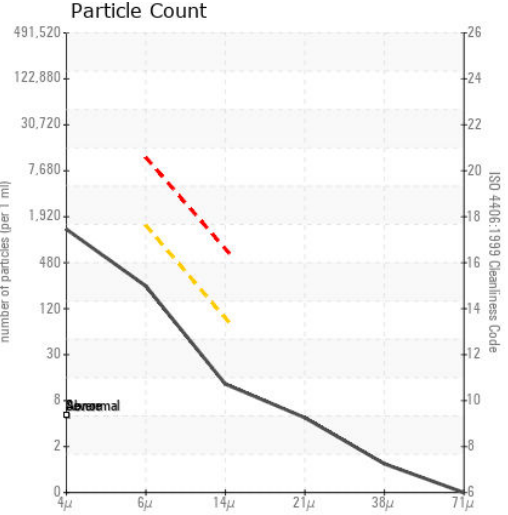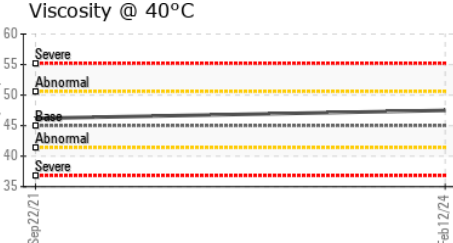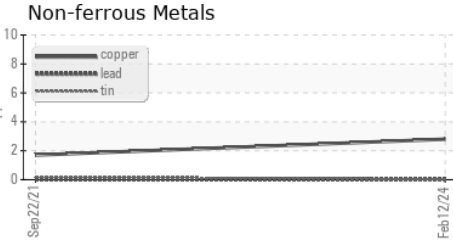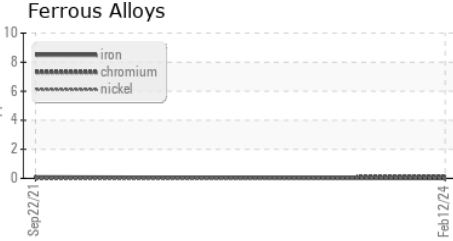

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA011614 **Received** : 22 Feb 2024
Lab Number : 06097676 **Tested** : 27 Feb 2024
Unique Number : 10890529 **Diagnosed** : 27 Feb 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

MARQUIS AUTO BODY
 950 PETALUMA HILL RD
 SANTA ROSA, CA
 US 95404
 Contact: TROY
 troy@marquisautobody.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)