

OIL ANALYSIS REPORT

Sample Rating Trend ISO ISO

Machine Id 2350965 (S/N 1034) Component Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	AHON	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA008555	KCP54328	KCP32994
Sample Date		Client Info		15 Feb 2024	17 Jan 2023	27 Apr 2021
Machine Age	hrs	Client Info		119685	113000	100467
Oil Age	hrs	Client Info		0	3000	0
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	8	7	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
	ppin		1	-	-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	1	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	0	26	0
Calcium	ppm	ASTM D5185m	0	1	0	0
Phosphorus	ppm	ASTM D5185m	0	3	24	2
Zinc	ppm	ASTM D5185m	0	0	25	0
Sulfur	ppm	ASTM D5185m	23500	13043	22960	11155
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	15	11	2
Sodium	ppm	ASTM D5185m		<1	8	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.003	0.012	0.018
ppm Water	ppm	ASTM D6304	>500	34	125.0	187.9
	ESS	method	limit/base	current	history1	history2
FLUID CLEANLIN						
FLUID CLEANLIN		ASTM D7647		34478	11414	
		ASTM D7647 ASTM D7647	>1300	34478 11485	11414 2 931	
Particles >4μm Particles >6μm						
Particles >4μm Particles >6μm Particles >14μm		ASTM D7647	>80	<u> </u>	▲ 2931▲ 205	
Particles >4μm Particles >6μm Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647	>80	▲ 11485 ▲ 997	 2931 205 70 	
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	 11485 997 221 5 	 2931 205 70 12 	
Particles >4μm Particles >6μm Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	 11485 997 221 	 2931 205 70 	
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4 >3	 11485 997 221 5 0 	 2931 205 70 12 7 	


Report Id: PACTRA [WUSCAR] 06097694 (Generated: 02/25/2024 10:38:23) Rev: 1

Contact/Location: ANTHONY REYES - PACTRA




OIL ANALYSIS REPORT

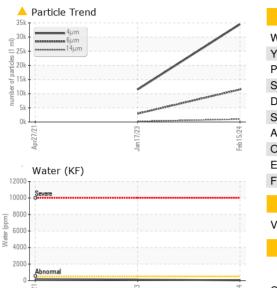

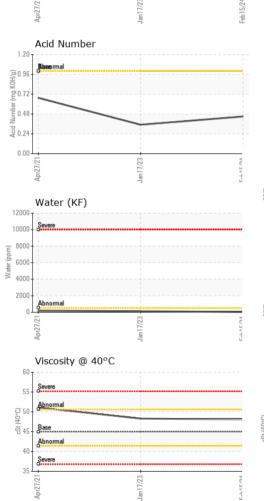

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.1	48.3	51.1
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color				a.		

Bottom

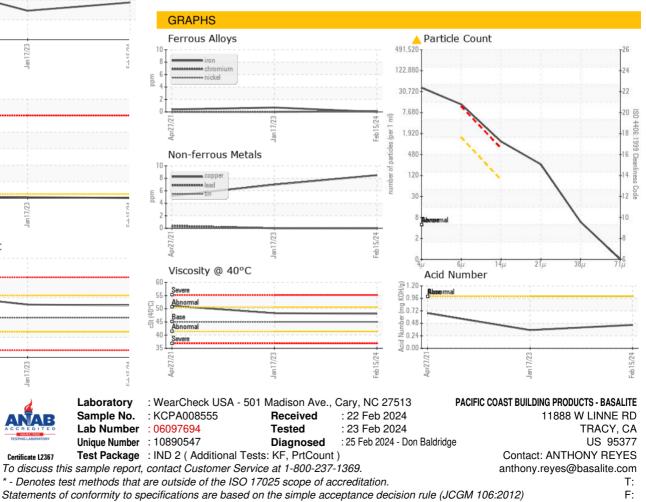

Certificate L2367

ñ

Contact/Location: ANTHONY REYES - PACTRA