




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

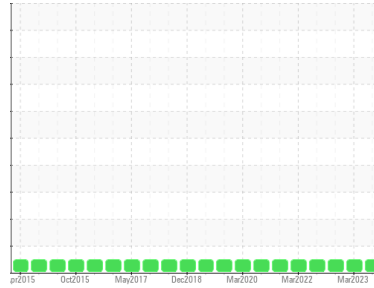

Area
FOUR MILE RIDGE [200005315]
 Machine Id
83308 SITE 2
 Component
Wind Turbine Gearbox
 Fluid
CASTROL OPTIGEAR SYNTHETIC X 320 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX012342	NX012345	NX011117
Sample Date	Client Info		20 Feb 2024	08 Mar 2023	31 Oct 2022
Machine Age	hrs	Client Info	70197	64437	61948
Oil Age	hrs	Client Info	70197	64437	61948
Oil Changed	Client Info		Not Changed	Not Changd	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>80	14	12	12	
Iron	ppm	ASTM D5185m	>150	4	1	2
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	7	<1	0
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>50	5	3	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		33	0	35
Barium	ppm	ASTM D5185m		2	0	2
Molybdenum	ppm	ASTM D5185m	1150	851	575	561
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		10	8	6
Calcium	ppm	ASTM D5185m	2000	1564	1115	1061
Phosphorus	ppm	ASTM D5185m	400	361	294	271
Zinc	ppm	ASTM D5185m	0	0	0	1
Sulfur	ppm	ASTM D5185m	1850	2301	1398	1639

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	10	8	8
Sodium	ppm	ASTM D5185m	>20	2	6	7
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.05	0.003	0.013	0.013
ppm Water	ppm	ASTM D6304	>500	33	131.9	131.7

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		19521	9083	318
Particles >6µm	ASTM D7647	>2500	147	1330	78
Particles >14µm	ASTM D7647	>320	11	70	6
Particles >21µm	ASTM D7647	>80	7	20	2
Particles >38µm	ASTM D7647	>20	1	0	0
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/15	21/14/11	20/18/13	15/13/10

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	1.13	0.56	0.90




OIL ANALYSIS REPORT

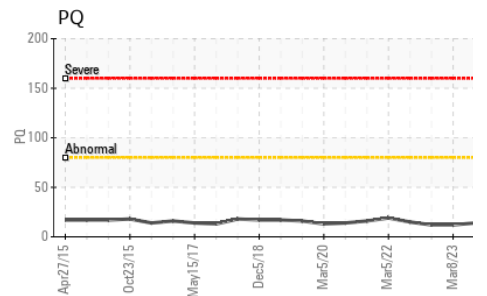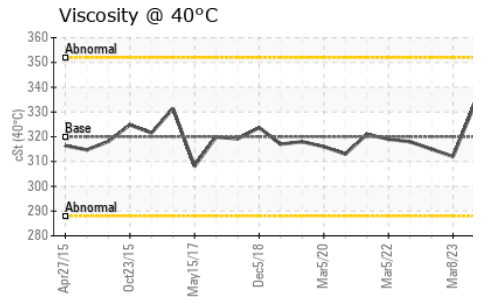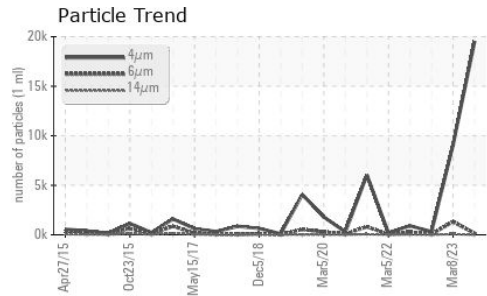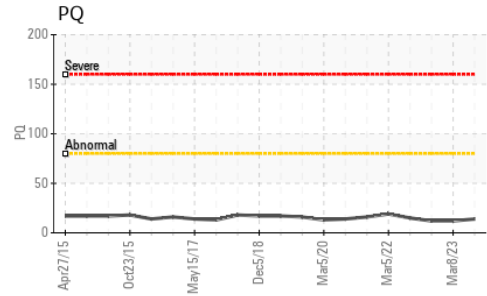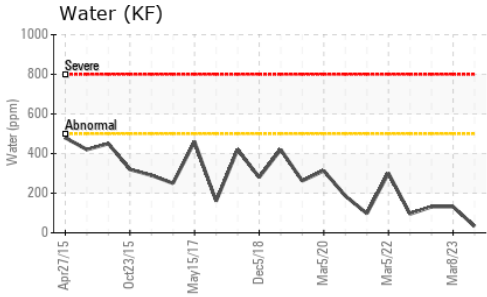





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 320	333	312	315

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

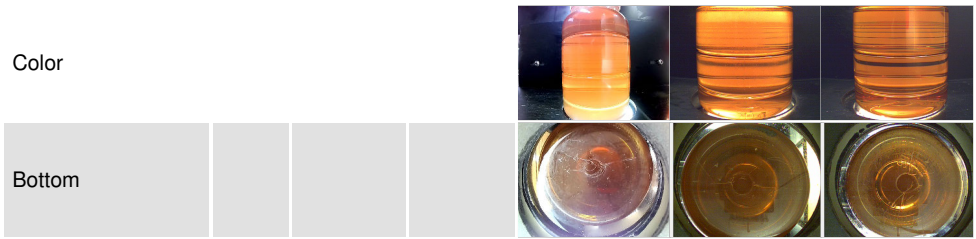

GRAPHS

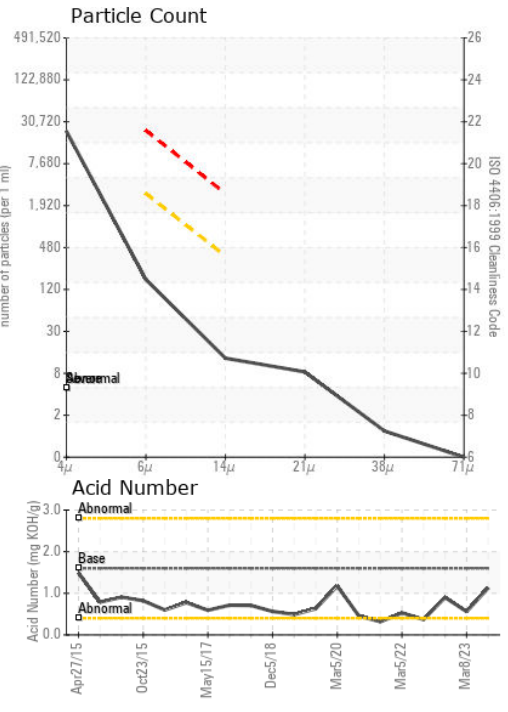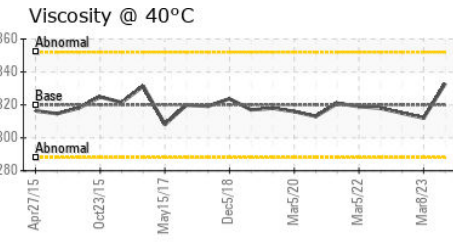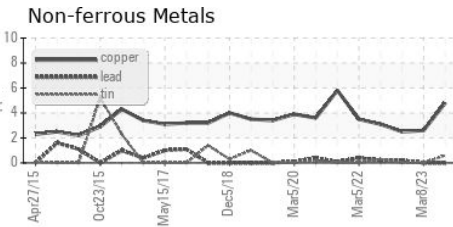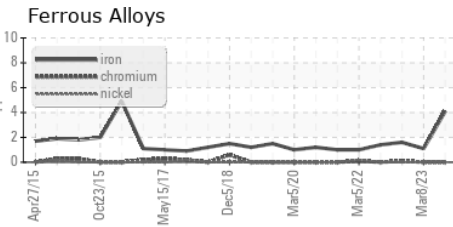

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX012342 **Received** : 22 Feb 2024
Lab Number : 06097712 **Tested** : 23 Feb 2024
Unique Number : 10890565 **Diagnosed** : 25 Feb 2024 - Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

NORDEX USA - Chicago
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606
 Contact: DEVIN LINEHAN
 DLinehan@nordex-online.com
 T: (312)386-4124
 F: (312)386-7102

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)