

# **OIL ANALYSIS REPORT**

## Area AIRLUBE 268 [1402468] ATLAS COPCO 10CA-CMP-100A - SEWARD PP NRG (S/N AIF118557) Component

Compressor

## DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

## Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

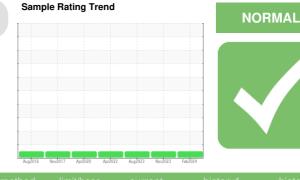


| SAMPLE INFORM    | IATION   | method      | limit/base | current     | history1    | history2    |
|------------------|----------|-------------|------------|-------------|-------------|-------------|
| Sample Number    |          | Client Info |            | UCH06097834 | UCH06005805 | UCH05936223 |
| Sample Date      |          | Client Info |            | 16 Feb 2024 | 01 Nov 2023 | 11 Aug 2023 |
| Machine Age      | hrs      | Client Info |            | 0           | 0           | 0           |
| Oil Age          | hrs      | Client Info |            | 0           | 0           | 0           |
| Oil Changed      |          | Client Info |            | N/A         | Not Changd  | Changed     |
| Sample Status    |          |             |            | NORMAL      | NORMAL      | NORMAL      |
| CONTAMINATION    | N        | method      | limit/base | current     | history1    | history2    |
| Water            |          | WC Method   | >0.1       | NEG         | NEG         | NEG         |
| WEAR METALS      |          | method      | limit/base | current     | history1    | history2    |
| Iron             | ppm      | ASTM D5185m | >50        | 0           | 0           | <1          |
| Chromium         | ppm      | ASTM D5185m | >5         | <1          | <1          | 0           |
| Nickel           | ppm      | ASTM D5185m |            | <1          | 0           | <1          |
| Titanium         | ppm      | ASTM D5185m |            | <1          | 0           | 0           |
| Silver           | ppm      | ASTM D5185m |            | <1          | <1          | 0           |
| Aluminum         | ppm      | ASTM D5185m | >15        | <1          | 2           | 0           |
| Lead             | ppm      | ASTM D5185m | >65        | <1          | <1          | <1          |
| Copper           | ppm      | ASTM D5185m | >65        | <1          | <1          | 1           |
| Tin              | ppm      | ASTM D5185m | >10        | <1          | 0           | 0           |
| Vanadium         | ppm      | ASTM D5185m |            | 0           | 0           | 0           |
| Cadmium          | ppm      | ASTM D5185m |            | <1          | 0           | 0           |
| ADDITIVES        |          | method      | limit/base | current     | history1    | history2    |
| Boron            | ppm      | ASTM D5185m | 0.6        | 0           | 0           | 0           |
| Barium           | ppm      | ASTM D5185m | 0.1        | 5           | 7           | 2           |
| Molybdenum       | ppm      | ASTM D5185m | 0          | <1          | 0           | 0           |
| Manganese        | ppm      | ASTM D5185m | 0.4        | <1          | 0           | 0           |
| Magnesium        | ppm      | ASTM D5185m | 0          | 0           | <1          | <1          |
| Calcium          | ppm      | ASTM D5185m | 0          | 0           | <1          | 12          |
| Phosphorus       | ppm      | ASTM D5185m | 337        | 256         | 276         | 291         |
| Zinc             | ppm      | ASTM D5185m | 0.1        | 2           | 0           | <1          |
| Sulfur           | ppm      | ASTM D5185m | 1096       | 1347        | 1261        | 886         |
| CONTAMINANTS     |          | method      | limit/base | current     | history1    | history2    |
| Silicon          | ppm      | ASTM D5185m | >35        | 3           | <1          | <1          |
| Sodium           | ppm      | ASTM D5185m |            | 0           | 0           | 0           |
| Potassium        | ppm      | ASTM D5185m | >20        | <1          | <1          | <1          |
| FLUID DEGRADA    | TION     | method      | limit/base | current     | history1    | history2    |
| Acid Number (AN) | mg KOH/g | ASTM D8045  | 0.414      | 0.05        | 0.099       | 0.14        |




# **OIL ANALYSIS REPORT**





| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | LIGHT    |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.1       | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPERT    | IES    | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 67.21      | 63.6    | 62.6     | 65.1     |
| SAMPLE IMAGES    | 3      | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            |         |          |          |
| Bottom           |        |           |            |         |          |          |

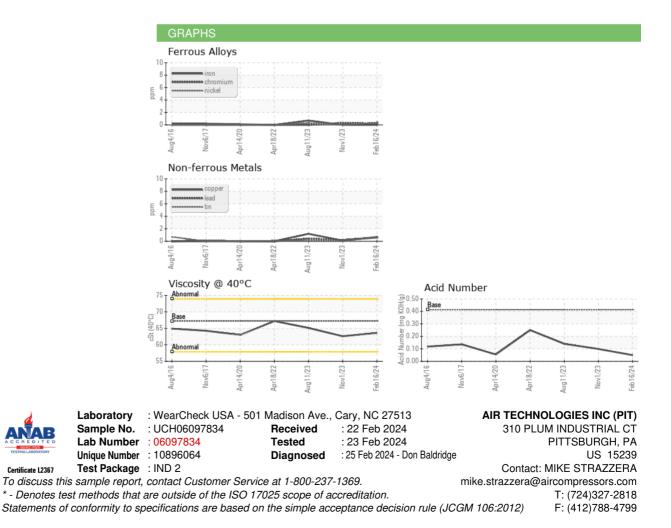

Certificate L2367

Contact/Location: MIKE STRAZZERA - UCAIRPIT