



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id


**505**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON HP 15W40 (--- GAL)**

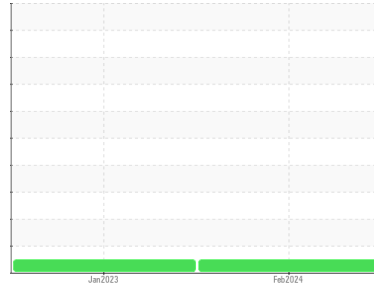

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0906244</b>	WC0727245	---
Sample Date	Client Info			<b>13 Feb 2024</b>	18 Jan 2023	---
Machine Age	mls	Client Info		<b>169808</b>	160173	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>30</b>	32	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>14</b>	6	---
Barium	ppm	ASTM D5185m		<b>0</b>	1	---
Molybdenum	ppm	ASTM D5185m		<b>65</b>	61	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>912</b>	880	---
Calcium	ppm	ASTM D5185m		<b>1107</b>	1074	---
Phosphorus	ppm	ASTM D5185m		<b>1043</b>	951	---
Zinc	ppm	ASTM D5185m		<b>1247</b>	1174	---
Sulfur	ppm	ASTM D5185m		<b>2974</b>	2920	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	---
Sodium	ppm	ASTM D5185m		<b>2</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.0</b>	10.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.7</b>	20.6	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.9</b>	16.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.0</b>	7.9	---











# OIL ANALYSIS REPORT

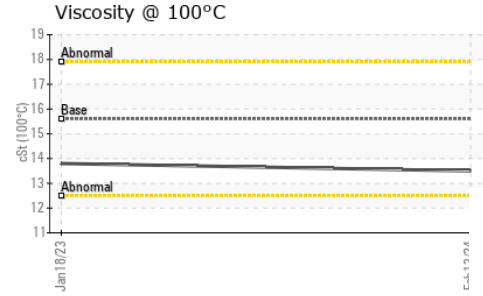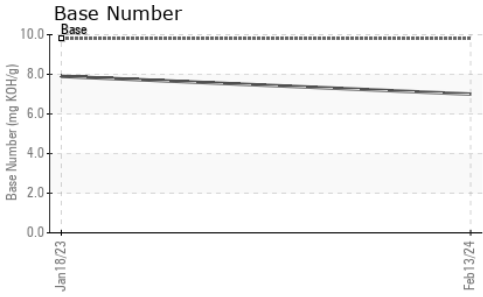

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	13.5	13.8

### GRAPHS

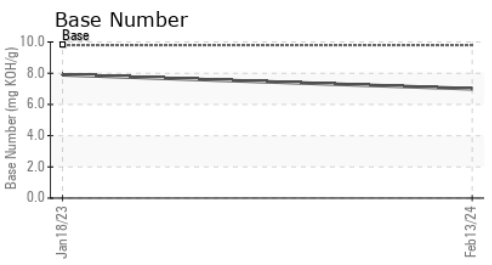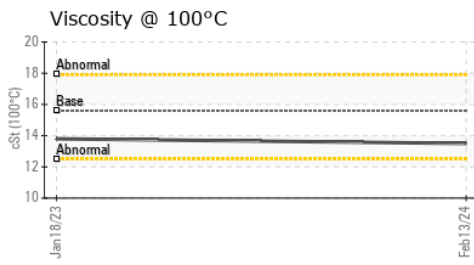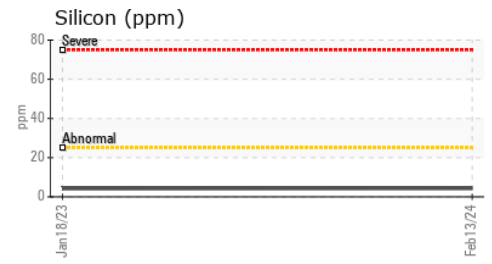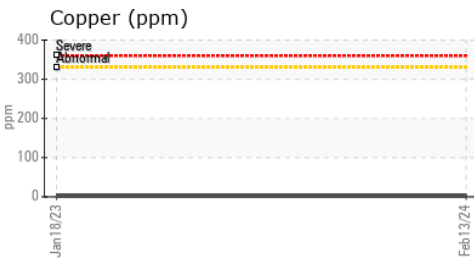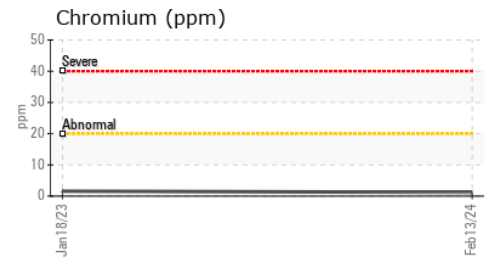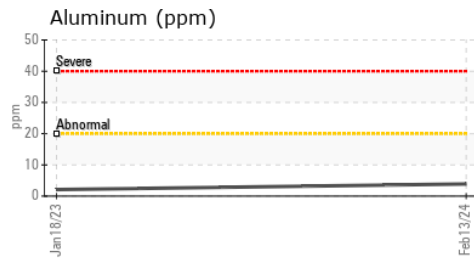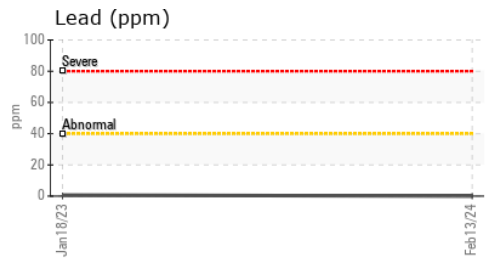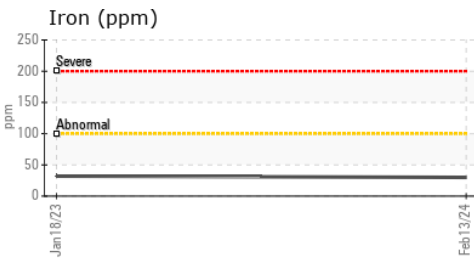

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0906244 **Received** : 23 Feb 2024  
**Lab Number** : 06098134 **Tested** : 25 Feb 2024  
**Unique Number** : 10896364 **Diagnosed** : 25 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**WAYNE CO SCHOOL BUS GARAGE**  
 1603 SALEM CHURCH RD  
 GOLDSBORO, NC  
 US 27530  
 Contact: BRANDON BRIGGS  
 brandonbriggs@wcps.org  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)