




# OIL ANALYSIS REPORT

Sample Rating Trend

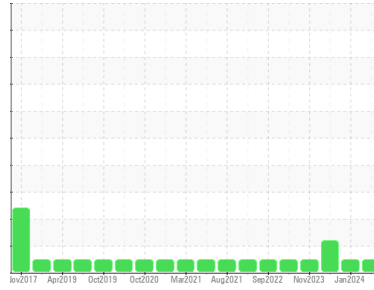

**NORMAL**



Machine Id  
**PETERBILT 6626**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0871030</b>	WC0871015	WC0871012
Sample Date	Client Info		<b>10 Feb 2024</b>	27 Jan 2024	25 Jan 2024
Machine Age	hrs	Client Info	<b>600</b>	600	450
Oil Age	hrs	Client Info	<b>600</b>	600	450
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>10</b>	13	29
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	8
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>8</b>	10	6
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>58</b>	58	53
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>836</b>	781	806
Calcium	ppm	ASTM D5185m 3000	<b>1125</b>	1183	1065
Phosphorus	ppm	ASTM D5185m 1150	<b>962</b>	942	939
Zinc	ppm	ASTM D5185m 1350	<b>1093</b>	1080	1057
Sulfur	ppm	ASTM D5185m 4250	<b>2854</b>	2777	2801

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	5	4
Sodium	ppm	ASTM D5185m >158	<b>4</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>8</b>	0	23

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	9.5	13.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.6</b>	21.1	26.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	17.6	▲ 29.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>7.4</b>	7.3	4.6











# OIL ANALYSIS REPORT

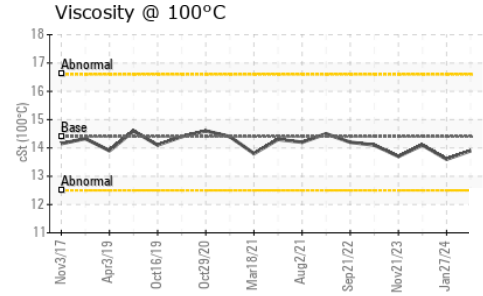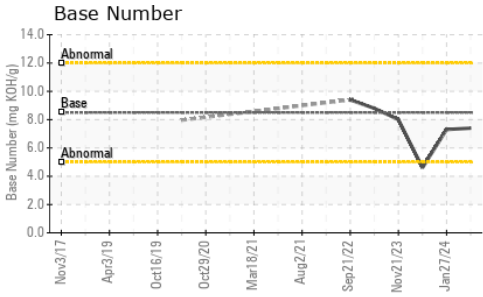

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	13.6	14.1

## GRAPHS

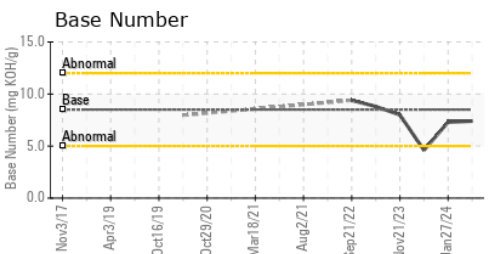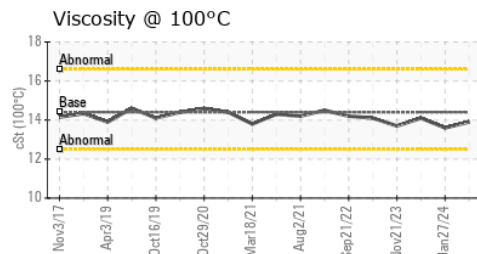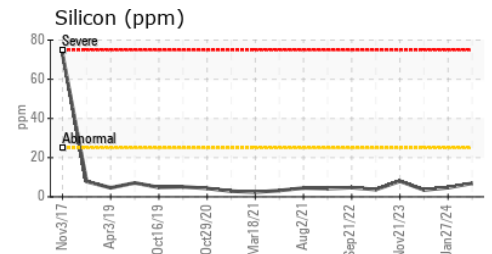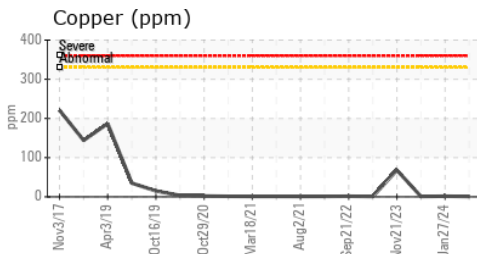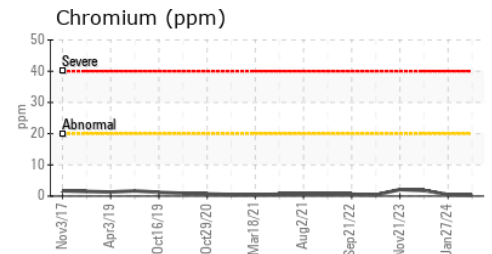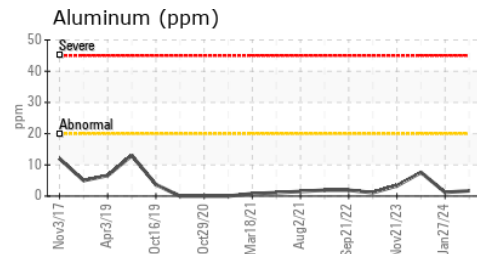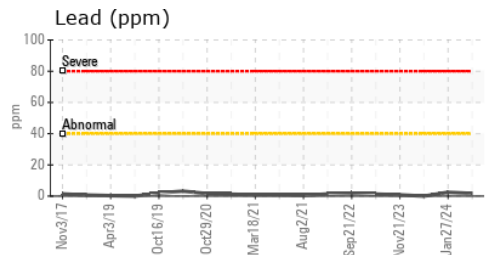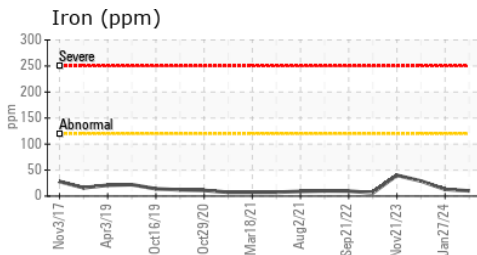

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0871030 **Received** : 23 Feb 2024  
**Lab Number** : 06098195 **Tested** : 25 Feb 2024  
**Unique Number** : 10896425 **Diagnosed** : 25 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**INTERSTATE WASTE-CHESTER**  
 89 BLACK MEADOW RD  
 CHESTER, NY  
 US 10918  
 Contact: ROB CLARKE  
 rclarke@interstatewaste.com  
 T:  
 F: (845)572-3301

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)