


# **OIL ANALYSIS REPORT**

# PRECISION EDGE 140327 [0029-2024] 600-SP-NC-D-116A

Component

**Hydraulic System** 

{not provided} (--- Oz)





## DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

## Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		,		Feb 2024		
SAMPLE INFORM	MATION	method				history2
Sample Number		Client Info		WC06098373		
Sample Date		Client Info		08 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		5		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		20		
Calcium	ppm	ASTM D5185m		4673		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		2		
Sulfur	ppm	ASTM D5185m		21683		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	6		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1083		
Particles >6µm		ASTM D7647		133		
Particles >14µm		ASTM D7647	>160	6		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/10		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
A	1/011/	ACTM DODAE		0.450		


Acid Number (AN)

mg KOH/g ASTM D8045

0.459



# **OIL ANALYSIS REPORT**

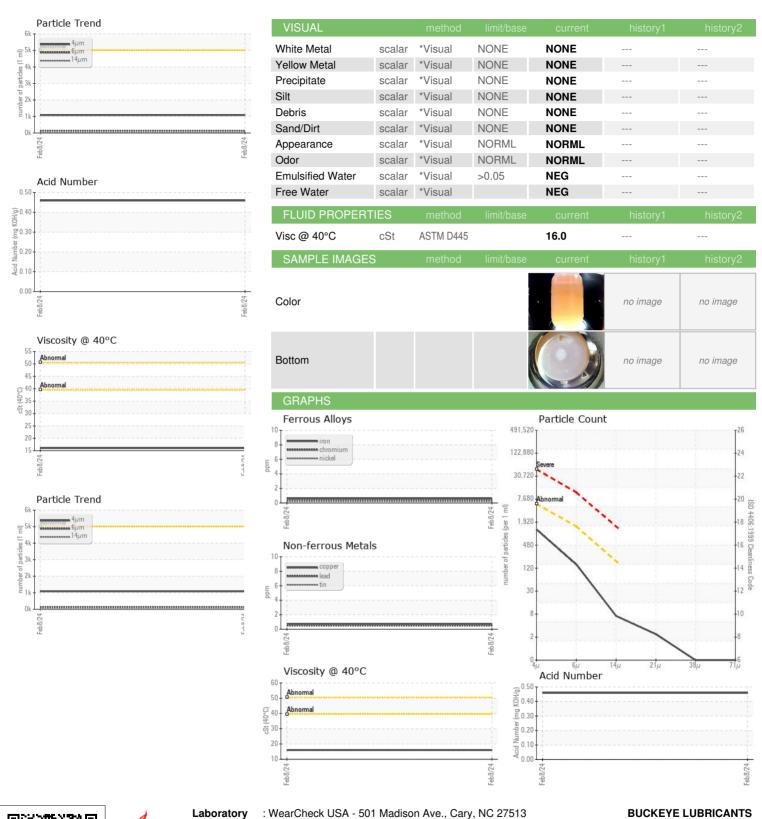





Certificate L2367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: WC06098373 Lab Number : 06098373 Unique Number: 10896603 Test Package : IND 2

Received **Tested** 

: 26 Feb 2024 Diagnosed

: 26 Feb 2024 - Don Baldridge

: 23 Feb 2024

US 44146 Contact: TOM GARGANTA sales@buckeyelubricants.com

Contact/Location: TOM GARGANTA - BUCBED

T: (216)581-3600 F: (216)581-2734

20801 SALISBURY RD

BEDFORD, OH

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)