

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **1** Component **Hydraulic System** Fluid **{not provided} (--- GAL)**

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.


Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Particle Filter (Magn: 200 x)

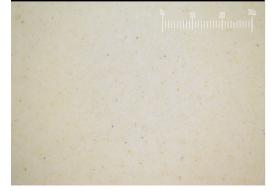

				Feb 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0001334		
Sample Date		Client Info		22 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	3		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		5		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		61		
Phosphorus	ppm	ASTM D5185m		251		
Zinc	ppm	ASTM D5185m		272		
Sulfur	ppm	ASTM D5185m		3435		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm		>15	2		
Sodium	ppm	ASTM D5185m	210	0		
Potassium	ppm	ASTM D5185m	>20	3		
FLUID CLEANLIN		method	limit/base		history1	history2
Particles >4µm	LOO	ASTM D7647	>10000	▲ 14940		
Particles >4µm		ASTM D7647 ASTM D7647	>2500	1334		
Particles >0µm		ASTM D7647 ASTM D7647	>320	25		
Particles >21µm		ASTM D7647 ASTM D7647	>320	3		
			>00	3		
Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647		0		
Oil Cleanliness			>4	0		
		ISO 4406 (c)	>20/18/15			
FLUID DEGRADA		method	limit/base		history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.44		
1./(8.21) Boy: 1			Contact/L	ocation: CHARL		

Report Id: ASHNEWPA [WUSCAR] 06098376 (Generated: 02/28/2024 11:48:21) Rev: 1

Contact/Location: CHARLENE WARCHOL - ASHNEWPA



491.520 122 88

Ê 30,720

number of particles (per 1

7,68

1.92 480

120

30

8

16k

14 Î

12

0

0.50

(B/HOX Ê0.30 E 0.20

Pio 0.1 0.00

55

50 49


()-0+ 40

30

25 Feb22/24

ž 3! eb22/

OIL ANALYSIS REPORT

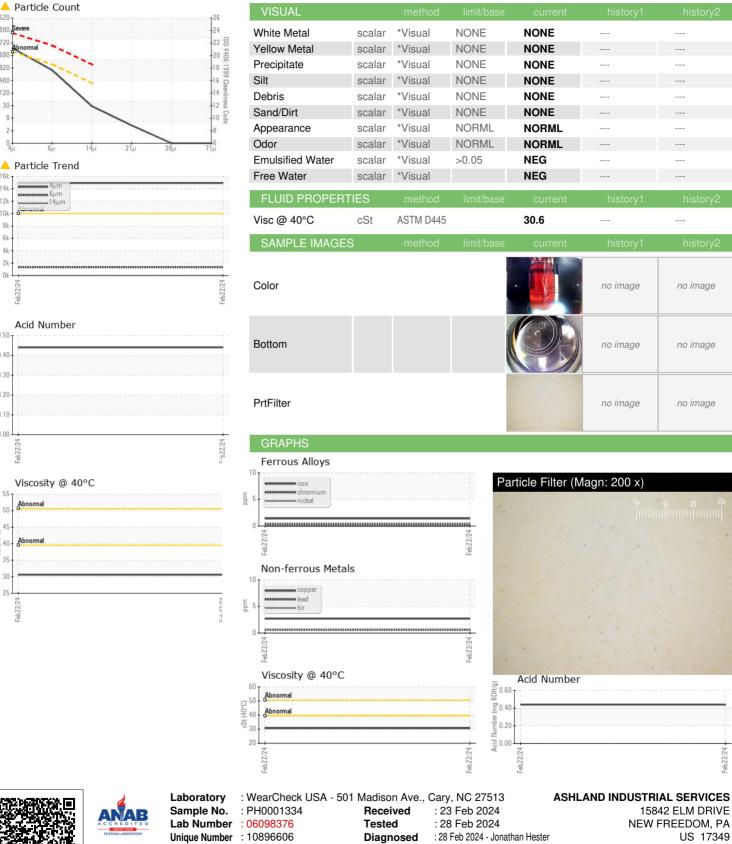

Test Package : PLANT (Additional Tests: PrtFilter) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ASHNEWPA [WUSCAR] 06098376 (Generated: 02/28/2024 11:48:21) Rev: 1

Contact/Location: CHARLENE WARCHOL - ASHNEWPA

US 17349

T: F:

cwarchol@aisco.org

Contact: CHARLENE WARCHOL

no image

no imade

no image