

# **OIL ANALYSIS REPORT**



ISO

# KAESER 7824086

#### Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP50396		
Sample Date		Client Info		07 Feb 2024		
Machine Age	hrs	Client Info		20418		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m		2		
Tin	ppm	ASTM D5185m	>10	2 <1		
Vanadium	ppm	ASTM D5185m	~10	0		
Cadmium	ppm	ASTM D5185m		۰ <1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	32		
Molybdenum	ppm	ASTM D5185m	00	< <u>1</u>		
Manganese	ppm	ASTM D5185m		<1		
Magnesium		ASTM D5185m	90	65		
Calcium	ppm ppm	ASTM D5185m		3		
		ASTM D5185m	2	0		
Phosphorus	ppm			-		
Zinc	ppm	ASTM D5185m		6		
Sulfur	ppm	ASTM D5185m		19485		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		19		
Potassium	ppm	ASTM D5185m	>20	4		
Water	%	ASTM D6304	>0.05	0.016		
ppm Water	ppm	ASTM D6304	>500	168		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
		ASTM D7647		102605		
Particles >4µm						
		ASTM D7647	>1300	<u> </u>		
Particles >4µm		ASTM D7647 ASTM D7647	>1300 >80	▲ 44915▲ 3342		
Particles >4μm Particles >6μm Particles >14μm			>80			
Particles >4μm Particles >6μm Particles >14μm Particles >21μm		ASTM D7647	>80	<b>A</b> 3342		
Particles >4μm Particles >6μm		ASTM D7647 ASTM D7647	>80 >20 >4	▲ 3342 ▲ 672		
Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	<ul><li>▲ 3342</li><li>▲ 672</li><li>▲ 9</li></ul>		
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4 >3	<ul> <li>3342</li> <li>672</li> <li>9</li> <li>1</li> </ul>		



Built for a lifetime

120

.100 

80

40

20

0

12000

1000

800 (maa)

600 Water 400

200

0.50

(B/HOX Ē0.3

E 0.20

Pio 0.1

0.00

1000

600 Water (

4000

200

52

50

48

(J) 46 55 (40°C) Bas

43

40

3


-9-


-6

-9

49

arti 60



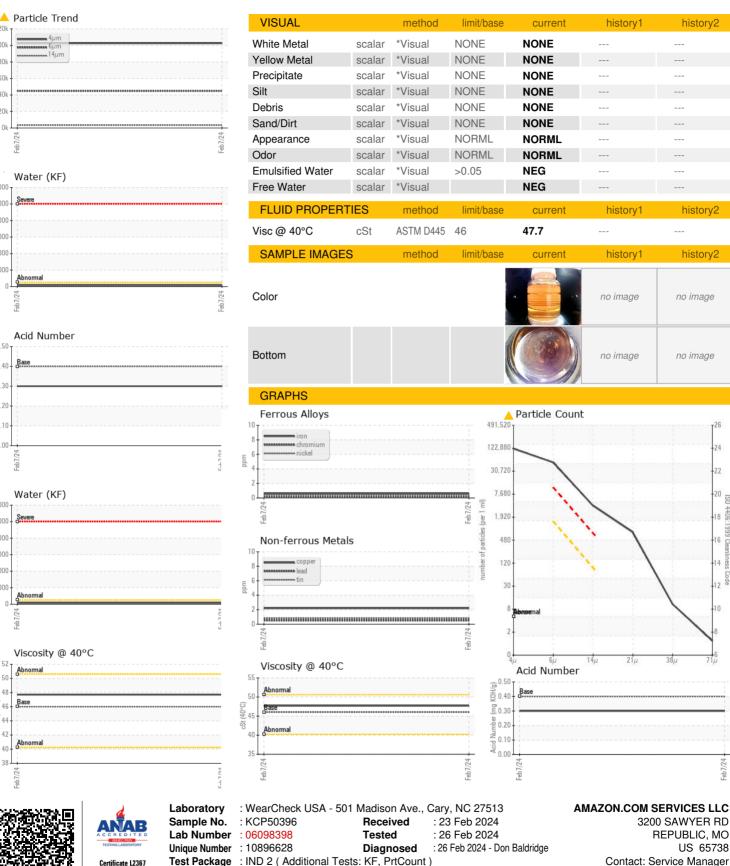

3200 SAWYER RD REPUBLIC, MO US 65738 Contact: Service Manager

38

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

history2

history2

history2

no image

no imade

4406

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.