

# **OIL ANALYSIS REPORT**

## Sample Rating Trend



KAESER 7854297

#### Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

# Contamination


There is a moderate amount of particulates present in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP50386		
Sample Date		Client Info		07 Feb 2024		
Machine Age	hrs	Client Info		18831		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum		ASTM D5185m	>10	<1		
	ppm					
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm		>50	4		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	10		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	59		
Calcium	ppm	ASTM D5185m	2	1		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		4		
Sulfur	ppm	ASTM D5185m		18419		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		19		
Potassium	ppm	ASTM D5185m	>20	4		
Water	%	ASTM D6304	>0.05	0.021		
ppm Water	ppm	ASTM D6304	>500	214		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5147		
		ASTM D7647	>1300	<b>1534</b>		
Particles >6µm			>80	<b>9</b> 3		
		ASTM D7647	>00			
Particles >14µm		ASTM D7647 ASTM D7647		19		
Particles >14µm Particles >21µm						
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647	>20 >4	19		
Particles >14μm Particles >21μm Particles >38μm Particles >71μm		ASTM D7647 ASTM D7647	>20 >4	19 0		
Particles >14μm Particles >21μm Particles >38μm	TION	ASTM D7647 ASTM D7647 ASTM D7647	>20 >4 >3	19 0 0		

# COMPRESSOR Built for a lifetime




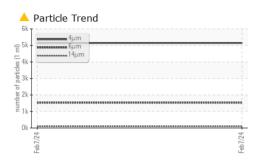

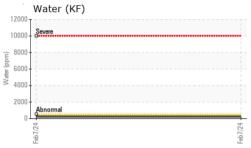

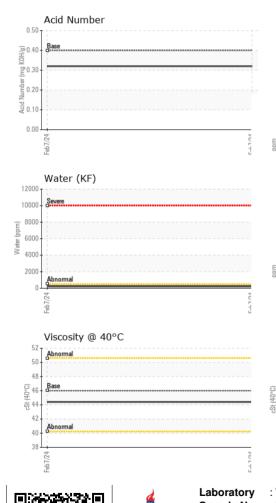

Ś

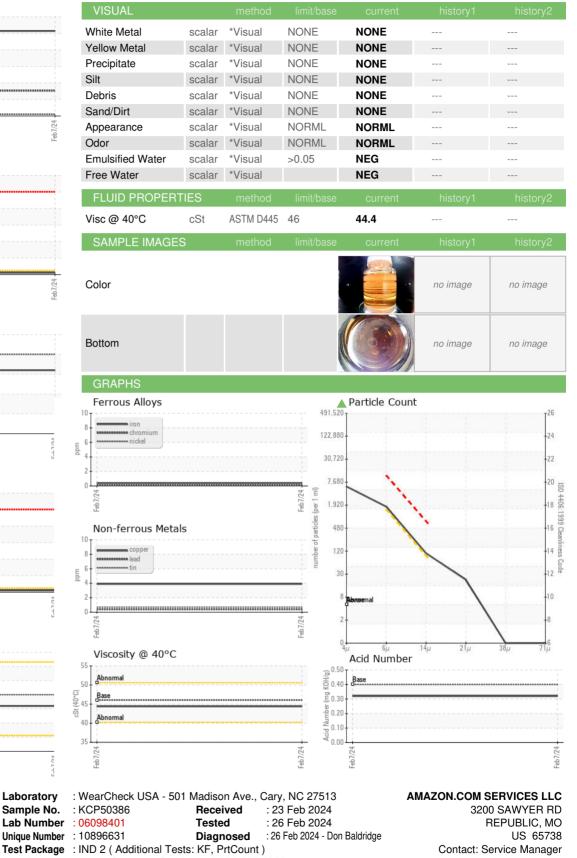

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Sample No.

Lab Number