


## **OIL ANALYSIS REPORT**





Machine Id **1422485 (S/N 02612020)** Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011768		
Sample Date		Client Info		08 Feb 2024		
Machine Age	hrs	Client Info		25592		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	15		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	5		
Molybdenum	ppm	ASTM D5185m	0	<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	0		
Zinc	ppm	ASTM D5185m	0	3		
Sulfur	ppm	ASTM D5185m	23500	19107		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	0.009		
ppm Water	ppm	ASTM D6304	>500	91		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15017		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<b>A</b> 237		
Particles >21µm		ASTM D7647	>20	<mark>人</mark> 63		
Particles >38µm		ASTM D7647	>4	2		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/19/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.48		

Contact/Location: INFO ? - DUASANCA







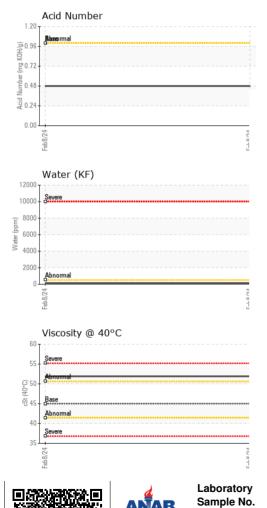

Certificate L2367

# **OIL ANALYSIS REPORT**

VISUAL		method	limit/base	current	history1	history
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERTI	IES	method	limit/base	current	history1	history
Visc @ 40°C	cSt	ASTM D445	45	51.9		
SAMPLE IMAGES		method	limit/base	current	history1	history
Color					no image	no imag
Bottom			1		no image	no image
GRAPHS						
Ferrous Alloys				Particle Count		
10 8			491,520	1		
contraction chromium			122,880	-		
			30,720			****
2-						
0			7,680			
Feb8/24			per 1 ml			
Non-ferrous Metals			300 H		<b>N</b>	
<sup>15</sup> T	,		of bar			
copper lead			Feb8/24 1000 1 ml) 1260 1 ml)	1	1	
E .			30	)-		
5 -			8		1	
0						
Feb8/24			Feb8/24	+		1
ت Viscosity @ 40°C			<u>د</u> (	4μ 6μ	14μ 21μ	38µ 71
60 T			<sub>B</sub> 1.20	Acid Number		
55 - Severe			HO 96	<b>Base</b> rmal		
() 50 + Abnormal Base Abnormal			ຍັ 0.72			
40 Abnormal			4 0.48	1		
35 Severe			(B)HO3 0.96 (B)HO3 0.96 (B)HO3 0.96 (B) 0.97 (B) 0.97 (B) 0.96 (B) 0.97 (B) 0.96 (B) 0.96 (B) 0.96 (B) 0.96 (B) 0.96 (B) 0.96 (B) 0.96 (B) HO3 0.96 (B) 0.96			
Feb8/24			Feb 8/24	Feb8/24		
Fee			Fet	<u>a</u>		
: WearCheck USA - 501	Madiso	on Ave., Carv	, NC 27513		DU-ALL ANC	DIZING CO
: KCPA011768	Rece	ived : 23	3 Feb 2024		730 (	CHESTNUT
: 06098435	Teste	e <b>d</b> : 26	5 Feb 2024		:	SAN JOSE
: 10896665		nosed : 26	Feb 2024 - Don	Doldrid		US 95

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

info@gmpplating.com