

OIL ANALYSIS REPORT

Sample Rating Trend



GREENERD 250 TON (S/N 9503851)

Hydraulic System

DENNIS BURKE AW 46 (310 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			May2021	Feb2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST43913	ST42234	
Sample Date		Client Info		13 Feb 2024	07 May 2021	
Machine Age	mths	Client Info		0	0	
Oil Age	mths	Client Info		113	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	<1	
Chromium	ppm	ASTM D5185m	>20	5	2	
Nickel	ppm	ASTM D5185m	>20	<1	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		<1	<1	
Aluminum	ppm	ASTM D5185m	>20	<1	0	
Lead	ppm	ASTM D5185m	>20	<1	0	
Copper	ppm	ASTM D5185m	>20	3	<1	
Tin	ppm	ASTM D5185m	>20	<1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		<1	0	
	ppm		11			
ADDITIVES		method	limit/base		history1	history2
Boron	ppm	ASTM D5185m		<1	2	
Barium	ppm	ASTM D5185m		5	0	
Molybdenum	ppm	ASTM D5185m		1	<1	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m		3	4	
Calcium	ppm	ASTM D5185m		27	27	
Phosphorus	ppm	ASTM D5185m		295	326	
Zinc	ppm	ASTM D5185m		402	389	
Sulfur	ppm	ASTM D5185m		1063	859	
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	<1	
Sodium	ppm	ASTM D5185m		0	2	
Potassium	ppm	ASTM D5185m	>20	<1	<1	
Water	%	ASTM D6304	>0.05	0.005	0.001	
ppm Water	ppm	ASTM D6304	>500	56	8.4	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	7139		
Particles >6µm		ASTM D7647	>2500	999		
Particles >14µm		ASTM D7647	>320	24		
Particles >21µm		ASTM D7647	>80	3		
Particles >38µm		ASTM D7647	>20	0		
Particles >71μm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/17/12		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.38	0.420	
	0 - 0					

Report Id: SENSHA [WUSCAR] 06098440 (Generated: 02/26/2024 09:32:23) Rev: 1


Contact/Location: MATT CINELLI - SENSHA



OIL ANALYSIS REPORT

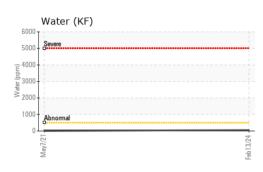



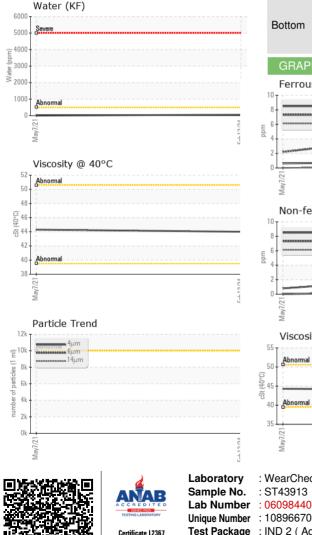





Test Package : IND 2 (Additional Tests: KF) To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Tested

Diagnosed

: 26 Feb 2024

: 26 Feb 2024 - Wes Davis

SHARON, MA

T: (781)784-1400

Contact: MATT CINELLI

mcinelli@metalbellows.com

US 02067

F: