

# **OIL ANALYSIS REPORT**

Sample Rating Trend



INGERSOLL RAND MVP-Oneok

Component

**Rotary Compressor** 

INGERSOLL-RAND SSR ULTRA COOLANT (--- GAL)

# DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data update for particle count.

#### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


( GAL)				Feb2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		URI000005		
Sample Date		Client Info		20 Feb 2024		
Machine Age	hrs	Client Info		4771		
Oil Age	hrs	Client Info		4771		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Vater		WC Method	>0.6	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>70	0		
Chromium	ppm	ASTM D5185m	>10	0		
lickel	ppm	ASTM D5185m		1		
itanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
luminum	ppm	ASTM D5185m	>3	<1		
.ead	ppm	ASTM D5185m	>4	0		
Copper	ppm	ASTM D5185m	>20	<1		
-in	ppm	ASTM D5185m	>3	<1		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	500	272		
Nolybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
/lagnesium	ppm	ASTM D5185m	0	2		
Calcium	ppm	ASTM D5185m	0	3		
Phosphorus	ppm	ASTM D5185m	20	20		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	200	378		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>45	1		
Sodium	ppm	ASTM D5185m		47		
otassium	ppm	ASTM D5185m	>20	6		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history?
Particles >4µm		ASTM D7647	>10000	2662		
Particles >6µm		ASTM D7647	>2500	205		
Particles >14µm		ASTM D7647	>320	4		
Particles >21µm		ASTM D7647	>80	1		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Dil Cleanliness		ISO 4406 (c)	>20/18/15	19/15/9		
FLUID DEGRADA	ATION _	method	limit/base	current	history1	history
Aoid Number (AN)	та КОЦ/а	VCTM DOUVE		0.27		

Acid Number (AN)

mg KOH/g ASTM D8045



## **OIL ANALYSIS REPORT**

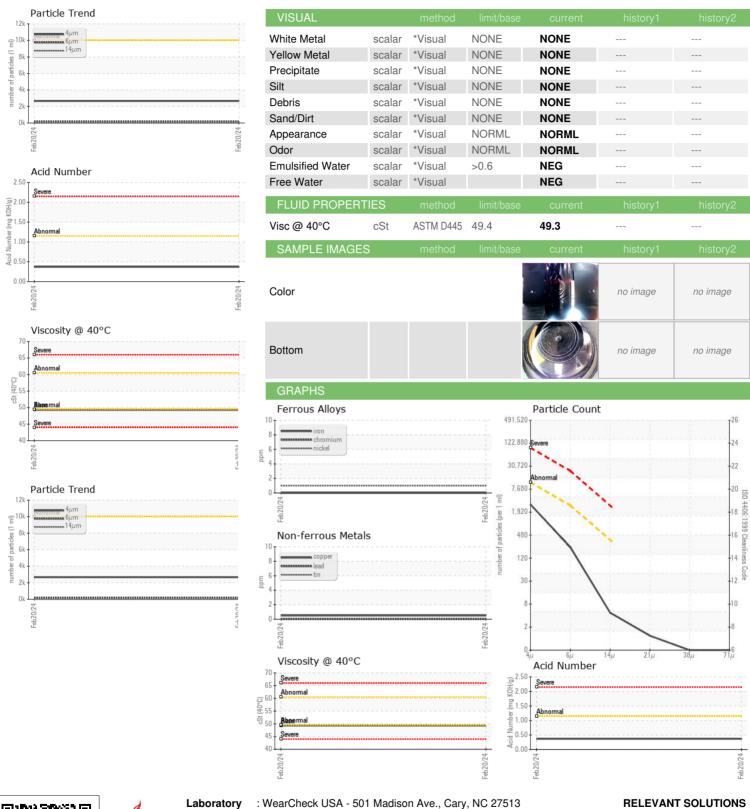





Report Id: UCRELHOU [WUSCAR] 06098546 (Generated: 02/28/2024 16:12:53) Rev: 2

Laboratory Sample No.

: URI0000005 Lab Number : 06098546

**Unique Number** : 10896776

Received **Tested** 

Diagnosed

: 23 Feb 2024 : 28 Feb 2024 : 28 Feb 2024 - Doug Bogart

9900 SAM HOUSTON CENTRE DRIVE

HOUSTON, TX US 77064 Contact: SHAWN TACKETT

Test Package: IND 2 (Additional Tests: PRTCOUNT) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

shawn.tackett@relevantsolutions.com T:

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: