




# OIL ANALYSIS REPORT

## Sample Rating Trend

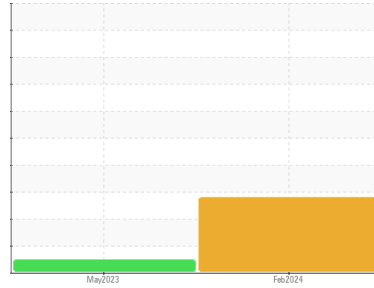

**DIRT**



Machine Id

**49**

Component

**Diesel Engine**

Fluid

**SHELL ROTELLA T 15W40 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

#### ▲ Wear

All component wear rates are normal.

#### ▲ Contamination

Fuel content negligible. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

#### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0867905</b>	WC0740553	---
Sample Date	Client Info		<b>22 Feb 2024</b>	22 May 2023	---
Machine Age	mls	Client Info	<b>0</b>	0	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>34</b>	26	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>▲ 15</b>	5	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>56</b>	<1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	316	<b>36</b>	13	---
Barium	ppm	ASTM D5185m	0.0	<b>5</b>	0	---
Molybdenum	ppm	ASTM D5185m	1.2	<b>44</b>	64	---
Manganese	ppm	ASTM D5185m		<b>5</b>	<1	---
Magnesium	ppm	ASTM D5185m	24	<b>802</b>	768	---
Calcium	ppm	ASTM D5185m	2292	<b>1230</b>	1325	---
Phosphorus	ppm	ASTM D5185m	1064	<b>697</b>	1038	---
Zinc	ppm	ASTM D5185m	1160	<b>859</b>	1270	---
Sulfur	ppm	ASTM D5185m	4996	<b>2326</b>	3907	---

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>▲ 27</b>	4	---
Sodium	ppm	ASTM D5185m		<b>7</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>61</b>	2	---
Fuel	%	ASTM D3524	>5	<b>1.7</b>	<1.0	---
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	---

### INFRA-RED






	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.1</b>	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.5</b>	19.0	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.3</b>	14.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>7.9</b>	8.8	---











# OIL ANALYSIS REPORT

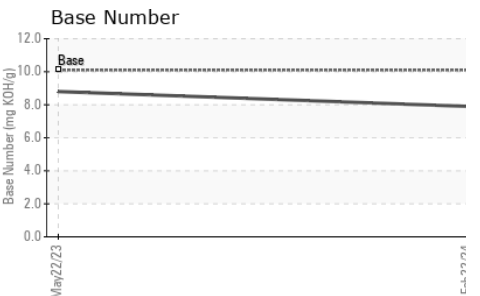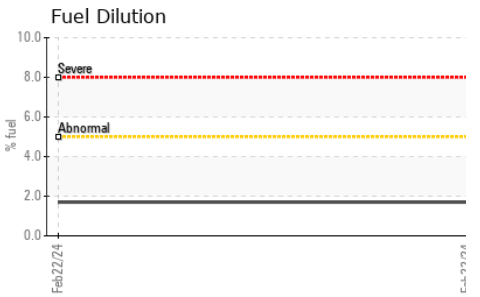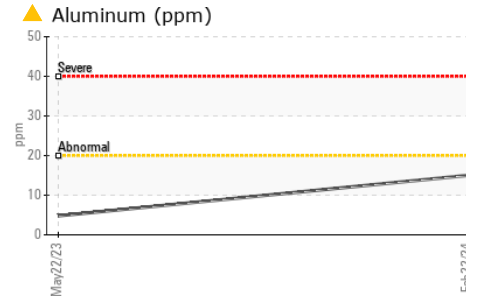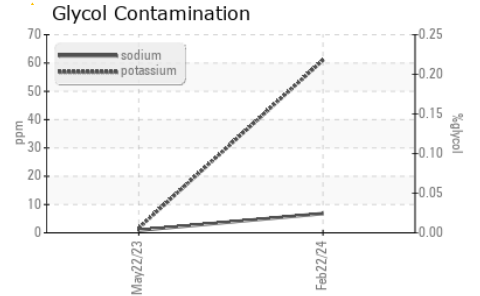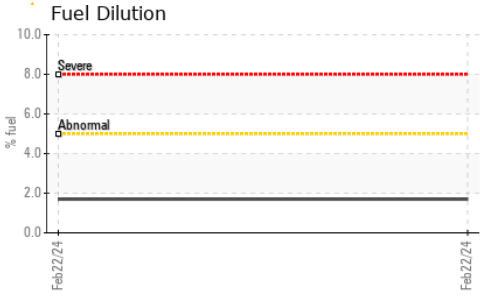

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.7	▲ 11.3	13.6

### GRAPHS

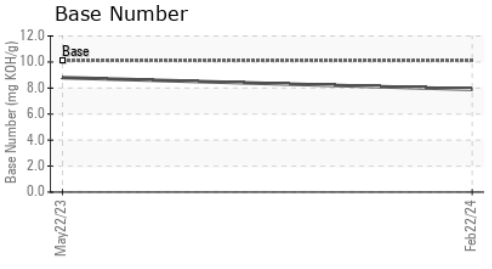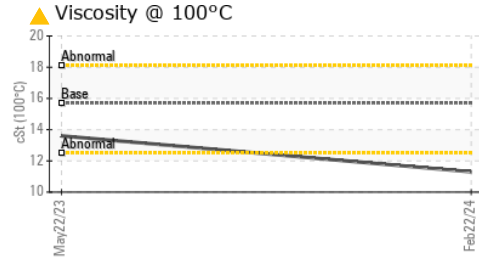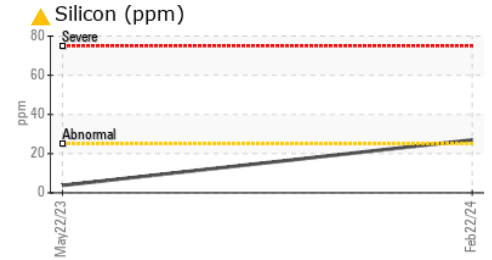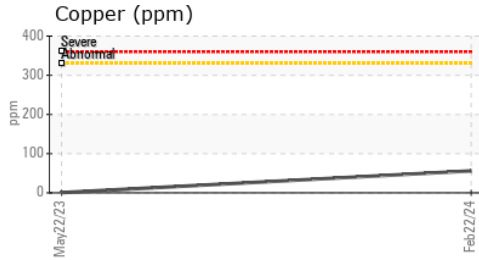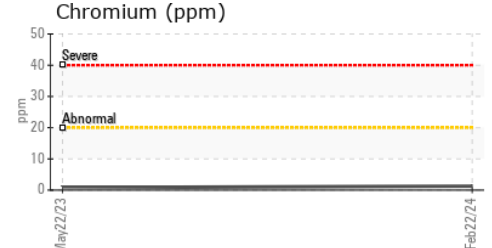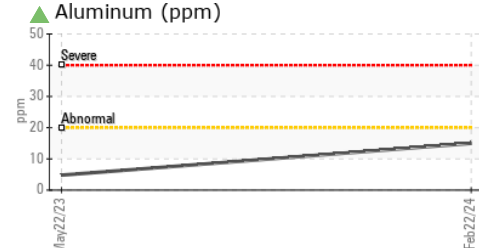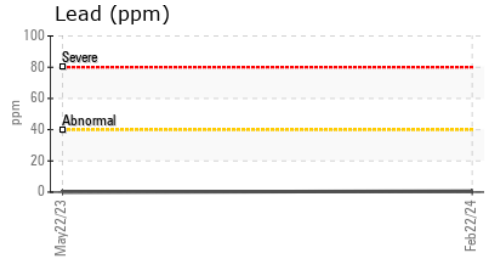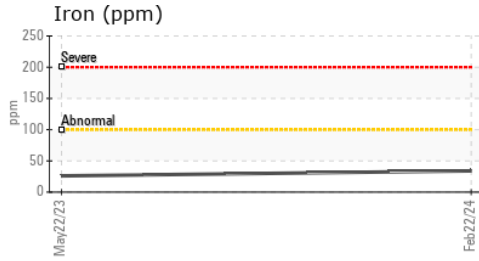

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0867905      **Received** : 23 Feb 2024  
**Lab Number** : 06098968      **Tested** : 27 Feb 2024  
**Unique Number** : 10897198      **Diagnosed** : 27 Feb 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, Glycol, PercentFuel, TBN )

**ANSON CO SCHOOL BUS GARAGE**  
 89 BOGGAN CUT RD  
 WADESBORO, NC  
 US 28135  
 Contact: MATT POWELL  
 powell.berkeley@anson.k12.nc.us

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)