


# **OIL ANALYSIS REPORT**

# <sup>Area</sup>[212410]

# AMERICAN 4029NS-10T30 ACME CORRUGATED (S/N 10404)

**Hydraulic System** 

AW HYDRAULIC OIL ISO 46 (--- GAL)





## DIAGNOSIS Recommendation

### Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match

indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |                       |            | Feb 2024    |          |          |
|------------------|----------|-----------------------|------------|-------------|----------|----------|
| SAMPLE INFOR     | MATION   | method                | limit/base | current     | history1 | history2 |
| Sample Number    |          | Client Info           |            | WC0858572   |          |          |
| Sample Date      |          | Client Info           |            | 11 Feb 2024 |          |          |
| Machine Age      | hrs      | Client Info           |            | 0           |          |          |
| Oil Age          | hrs      | Client Info           |            | 0           |          |          |
| Oil Changed      |          | Client Info           |            | Filtered    |          |          |
| Sample Status    |          |                       |            | NORMAL      |          |          |
| CONTAMINATIO     | N        | method                | limit/base | current     | history1 | history2 |
| Water            |          | WC Method             | >0.1       | NEG         |          |          |
| WEAR METALS      |          | method                | limit/base | current     | history1 | history2 |
| Iron             | ppm      | ASTM D5185m           | >20        | 0           |          |          |
| Chromium         | ppm      | ASTM D5185m           |            | 0           |          |          |
| Nickel           | ppm      | ASTM D5185m           | >10        | 0           |          |          |
| Titanium         | ppm      | ASTM D5185m           |            | 0           |          |          |
| Silver           | ppm      | ASTM D5185m           |            | 0           |          |          |
| Aluminum         | ppm      | ASTM D5185m           | >10        | 0           |          |          |
| Lead             | ppm      | ASTM D5185m           | >10        | 0           |          |          |
| Copper           | ppm      |                       | >75        | 1           |          |          |
| Tin              | ppm      | ASTM D5185m           | >10        | 0           |          |          |
| Vanadium         | ppm      | ASTM D5185m           | 710        | 0           |          |          |
| Cadmium          | ppm      | ASTM D5185m           |            | 0           |          |          |
| ADDITIVES        | ''       | method                | limit/base | current     | history1 | history2 |
| Boron            | nnm      | ASTM D5185m           | 5          | 0           |          |          |
| Barium           | ppm      | ASTM D5185m           | 5          | 0           |          |          |
| Molybdenum       | ppm      | ASTM D5185m           | 5          | 0           |          |          |
| Manganese        | ppm      | ASTM D5185m           | 3          | 0           |          |          |
| Magnesium        | ppm      | ASTM D5185m           | 25         | 16          |          |          |
| Calcium          | ppm      | ASTM D5185m           | 200        | 52          |          |          |
| Phosphorus       | ppm      | ASTM D5185m           | 300        | 259         |          |          |
| Zinc             |          | ASTM D5185m           | 370        | 280         |          |          |
| Sulfur           | ppm      | ASTM D5185m           | 2500       | 643         |          |          |
| CONTAMINANTS     |          |                       | limit/base |             |          |          |
| Silicon          |          | method<br>ASTM D5185m |            | current     | history1 | history2 |
| Sodium           | ppm      | ASTM D5185m           | >20        | <1<br>0     |          |          |
| Potassium        | ppm      | ASTM D5185m           | >20        | 0           |          |          |
|                  | ppm      |                       |            |             |          |          |
| FLUID CLEANLIN   | VESS     | method                | limit/base | current     | history1 | history2 |
| Particles >4µm   |          | ASTM D7647            | . 5000     | 1164        |          |          |
| Particles >6µm   |          | ASTM D7647            |            | 223         |          |          |
| Particles >14µm  |          | ASTM D7647            | >640       | 11          |          |          |
| Particles >21µm  |          | ASTM D7647            |            | 4           |          |          |
| Particles >38µm  |          | ASTM D7647            | >40        | 0           |          |          |
| Particles >71µm  |          | ASTM D7647            |            | 17/15/11    |          |          |
| Oil Cleanliness  |          | ISO 4406 (c)          | >/19/16    | 17/15/11    |          |          |
| FLUID DEGRADA    |          | method                | limit/base | current     | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045            | 0.57       | 0.26        |          |          |



# **OIL ANALYSIS REPORT**

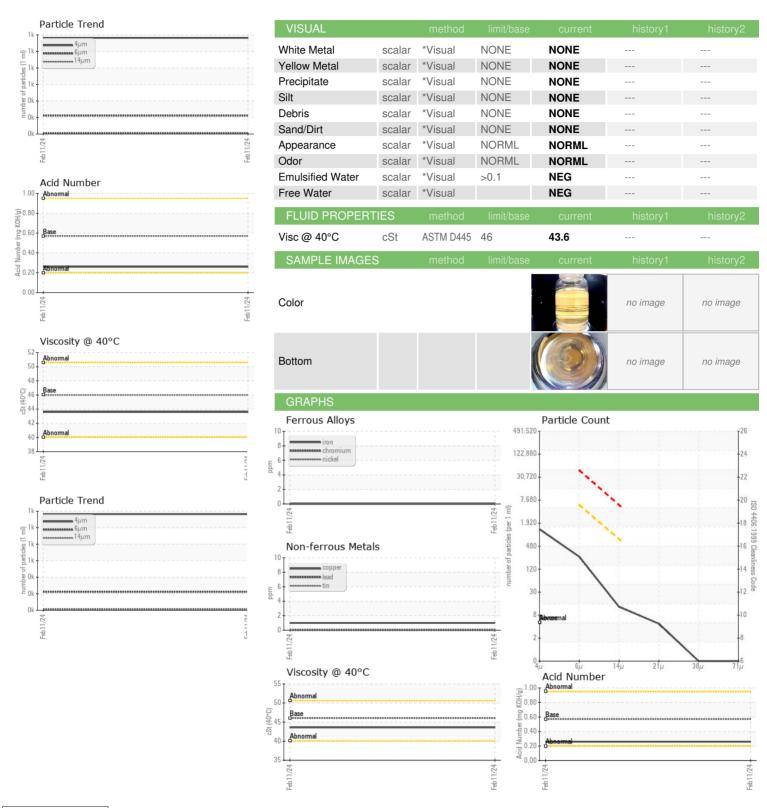





Certificate L2367

Laboratory Sample No. Lab Number

Unique Number: 10897346

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0858572 : 06099116

Test Package : IND 2

Received : 23 Feb 2024 **Tested** Diagnosed

: 26 Feb 2024 : 26 Feb 2024 - Wes Davis **ADVANCED EQUIPMENT SALES** 535 HAGEY RD SOUDERTON, PA US 18964

Contact: JEFF BURNLEY

jburnley@aesales.net T: (215)723-7200

F: (215)723-7201

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)