




OIL ANALYSIS REPORT

Sample Rating Trend

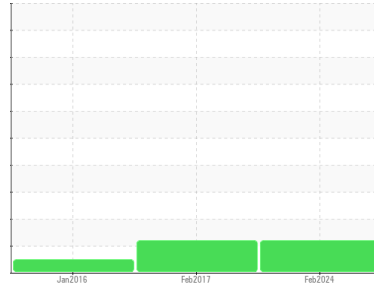

ISO



Machine Id
0-1823-0000

Component
Turbine
Fluid
MOBIL JET OIL II (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0903667	WCI2302187	WCI2279361
Sample Date	Client Info		09 Feb 2024	19 Feb 2017	14 Jan 2016
Machine Age	hrs	Client Info	4166	0	0
Oil Age	hrs	Client Info	4166	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >15	0	2	2
Chromium	ppm	ASTM D5185m >4	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	<1	<1	<1
Lead	ppm	ASTM D5185m	1	4	4
Copper	ppm	ASTM D5185m >5	2	3	2
Tin	ppm	ASTM D5185m >5	<1	0	<1
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	1	15	12

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	<1
Manganese	ppm	ASTM D5185m	<1	0	0
Magnesium	ppm	ASTM D5185m	<1	<1	0
Calcium	ppm	ASTM D5185m	<1	<1	0
Phosphorus	ppm	ASTM D5185m	2523	2080	2155
Zinc	ppm	ASTM D5185m	0	1	<1
Sulfur	ppm	ASTM D5185m	39	20	0

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	1	2	2
Sodium	ppm	ASTM D5185m	0	<1	<1
Potassium	ppm	ASTM D5185m >20	<1	0	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	▲ 11476	▲ 9546	275
Particles >6µm	ASTM D7647	>640	▲ 1438	▲ 872	150
Particles >14µm	ASTM D7647	>80	45	35	25
Particles >21µm	ASTM D7647	>20	12	8	8
Particles >38µm	ASTM D7647	>4	2	2	1
Particles >71µm	ASTM D7647	>3	0	1	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 21/18/13	▲ 20/17/12	15/14/12



OIL ANALYSIS REPORT

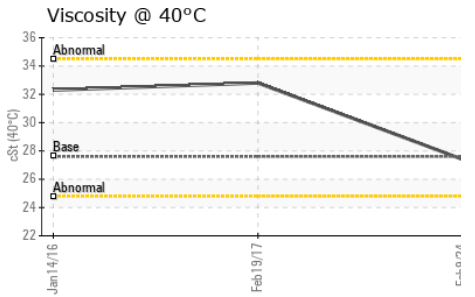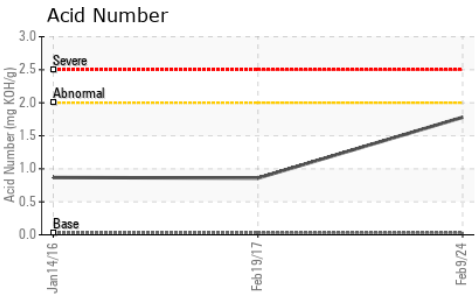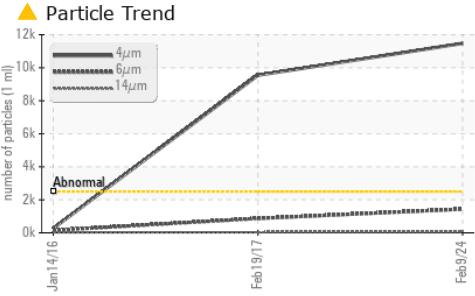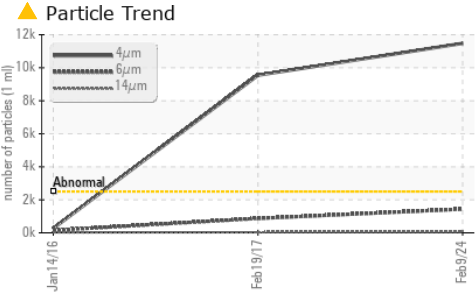


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.03	1.78	0.859	0.868





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	27.6	27.4	32.8	32.3

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

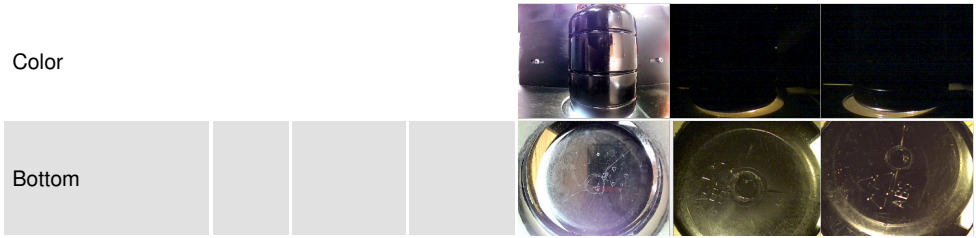

GRAPHS

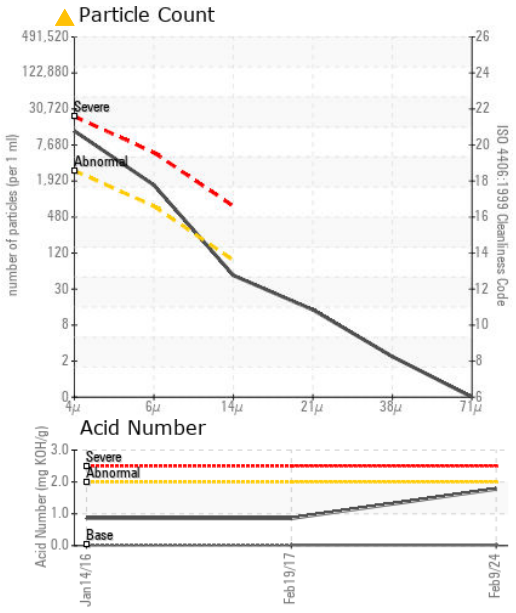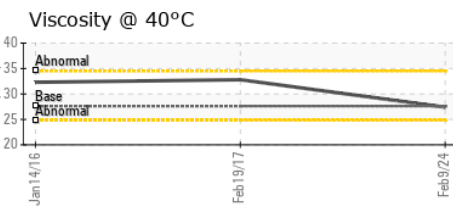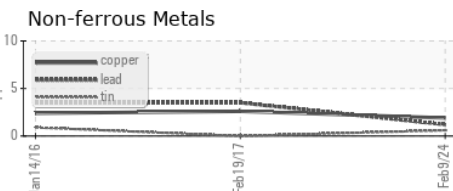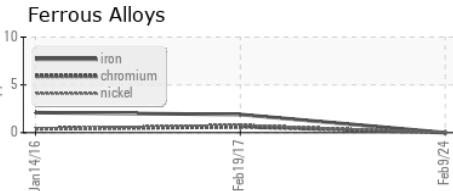

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0903667 **Received** : 23 Feb 2024
Lab Number : **06099121** **Tested** : 29 Feb 2024
Unique Number : 10897351 **Diagnosed** : 29 Feb 2024 - Jonathan Hester
Test Package : IND 2

ALLVAC - MACHINE SHOP
 2020 ASHCRAFT AVE
 MONROE, NC
 US 28110
 Contact: mark eilerman
 mark.eilerman@atimaterials.com
 T: (704)292-4051
 F: (704)282-0665

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)