


OIL ANALYSIS REPORT

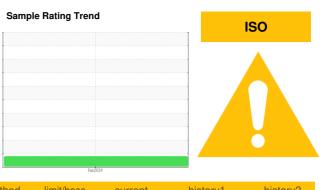

KAESER AIRCENTER SM 10 8663992 (S/N 2097)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Iron ppm ASTM D5185m >50 <1	story2
Machine Age hrs Client Info 2286 Oil Age hrs Client Info Changed	story2
Oil Age hrs Client Info 2286 Sample Status Client Info Changed WEAR METALS method limit/base current history1 hi Iron ppm ASTM D5185m >50 <1	story2
Oil Changed Client Info Changed Sample Status Image Image Current history1 Image Image Image	story2
Sample Status Image ABNORMAL WEAR METALS method limit/base current history1 history	story2
WEAR METALS method limit/base current history1 hi Iron ppm ASTM D5185m >50 <1	story2
Iron ppm ASTM D5185m >50 <1 Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >3 0 Silver ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 <1	story2
Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >3 0 Titanium ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 <1	
Nickel ppm ASTM D5185m >3 0 Titanium ppm ASTM D5185m >3 0 Silver ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 <1	
Initanium ppm ASTM D5185m >3 0 Silver ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 <1	
Silver ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 <1	
Aluminum ppm ASTM D5185m >10 <1 Lead ppm ASTM D5185m >50 5 Copper ppm ASTM D5185m >50 5 Tin ppm ASTM D5185m >10 <1	
Aluminum ppm ASTM D5185m >10 <1 Lead ppm ASTM D5185m >10 <1	
Lead ppm ASTM D5185m >10 <1 Copper ppm ASTM D5185m >50 5 Tin ppm ASTM D5185m >10 <1	
Copper ppm ASTM D5185m >50 5 Tin ppm ASTM D5185m >10 <1	
Tin ppm ASTM D5185m >10 <1 Vanadium ppm ASTM D5185m 0 0 Cadmium ppm ASTM D5185m 0 0 ADDITIVES method limit/base current history1 hi Boron ppm ASTM D5185m 0 0 Barium ppm ASTM D5185m 0 0 0 Manganese ppm ASTM D5185m 0 0 0 Magnesium ppm ASTM D5185m 0 2 Magnesium ppm ASTM D5185m 0 2 Calcium ppm ASTM D5185m 0 2 Sulfur ppm ASTM D5185m 0 21 Sulfur ppm ASTM D5	
VanadiumppmASTM D5185m0CadmiumppmASTM D5185m00ADDITIVESmethodlimit/basecurrenthistory1hiBoronppmASTM D5185m00BariumppmASTM D5185m9021MolybdenumppmASTM D5185m00ManganeseppmASTM D5185m10066MagnesiumppmASTM D5185m02CalciumppmASTM D5185m02PhosphorusppmASTM D5185m02SulfurppmASTM D5185m2350018480SulfurppmASTM D5185m>252SodiumppmASTM D5185m>2011SulfurppmASTM D5185m>2011SulfurppmASTM D5185m>2011PotassiumppmASTM D5185m>20111Water%ASTM D5185m>20135FLUID CLEANLINESSmethodlimit/basecurrenthistory1hiParticles >4µmASTM D76476119	
Cadmium ppm ASTM D5185m 0 ADDITIVES method limit/base current history1 hi <tore< th=""> Boron ppm ASTM D5185m 0 0 Barium ppm ASTM D5185m 90 21 Molybdenum ppm ASTM D5185m 90 21 Manganese ppm ASTM D5185m 0 0 Magnesium ppm ASTM D5185m 0 2 Calcium ppm ASTM D5185m 0 2 Magnesium ppm ASTM D5185m 0 2 Calcium ppm ASTM D5185m 0 21 Sulfur ppm ASTM D5185m 23500 18480 Soliun ppm ASTM D5185m >25 2</tore<>	
Boron ppm ASTM D5185m 0 0 Barium ppm ASTM D5185m 90 21 Molybdenum ppm ASTM D5185m 0 0 Manganese ppm ASTM D5185m 0 0 Magnesium ppm ASTM D5185m 100 66 Calcium ppm ASTM D5185m 0 2 Phosphorus ppm ASTM D5185m 0 2 Zinc ppm ASTM D5185m 0 2 Sulfur ppm ASTM D5185m 0 <1	
Barium ppm ASTM D5185m 90 21 Molybdenum ppm ASTM D5185m 0 0 Manganese ppm ASTM D5185m 0 0 Magnesium ppm ASTM D5185m 100 666 Calcium ppm ASTM D5185m 0 2 Calcium ppm ASTM D5185m 0 2 Phosphorus ppm ASTM D5185m 0 2 Sulfur ppm ASTM D5185m 0 <1 Sulfur ppm ASTM D5185m 23500 18480 Solicon ppm ASTM D5185m >25 2 Sodium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05	story2
Molybdenum ppm ASTM D5185m 0 0 Manganese ppm ASTM D5185m 0 <1	
Manganese ppm ASTM D5185m <1 Magnesium ppm ASTM D5185m 100 66 Calcium ppm ASTM D5185m 0 2 Calcium ppm ASTM D5185m 0 2 Phosphorus ppm ASTM D5185m 0 2 Zinc ppm ASTM D5185m 0 <1	
Magnesium ppm ASTM D5185m 100 66 Calcium ppm ASTM D5185m 0 2 Phosphorus ppm ASTM D5185m 0 2 Zinc ppm ASTM D5185m 0 2 Sulfur ppm ASTM D5185m 0 <1	
Calcium ppm ASTM D5185m 0 2 Phosphorus ppm ASTM D5185m 0 2 Zinc ppm ASTM D5185m 0 2 Sulfur ppm ASTM D5185m 0 <1	
Phosphorus ppm ASTM D5185m 0 2 Zinc ppm ASTM D5185m 0 <1 Sulfur ppm ASTM D5185m 23500 18480 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m >25 2 Sodium ppm ASTM D5185m >25 2 Potassium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05 0.013 FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	
Zinc ppm ASTM D5185m 0 <1 Sulfur ppm ASTM D5185m 23500 18480 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m >25 2 Sodium ppm ASTM D5185m >25 2 Potassium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05 0.013 ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	
Sulfur ppm ASTM D5185m 23500 18480 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m >25 2 Sodium ppm ASTM D5185m >25 2 Potassium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05 0.013 ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	
CONTAMINANTSmethodlimit/basecurrenthistory1hiSiliconppmASTM D5185m>252SodiumppmASTM D5185m16PotassiumppmASTM D5185m>2011Water%ASTM D6304>0.050.013ppm WaterppmASTM D6304>500135FLUID CLEANLINESSmethodlimit/basecurrenthistory1hiParticles >4µmASTM D76476119	
Silicon ppm ASTM D5185m >25 2 Sodium ppm ASTM D5185m 16 Potassium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05 0.013 ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	
Sodium ppm ASTM D5185m 16 Potassium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05 0.013 ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	story2
Potassium ppm ASTM D5185m >20 11 Water % ASTM D6304 >0.05 0.013 ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4μm ASTM D7647 6119	
Water % ASTM D6304 >0.05 0.013 ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	
ppm Water ppm ASTM D6304 >500 135 FLUID CLEANLINESS method limit/base current history1 hi Particles >4μm ASTM D7647 6119	
FLUID CLEANLINESS method limit/base current history1 hi Particles >4µm ASTM D7647 6119	
Particles >4μm ASTM D7647 6119	
Particles >6μm ASTM D7647 >1300 ▲ 2653	story2
	story2
Particles >14μm ASTM D7647 >80 76	story2
Particles >21μm ASTM D7647 >20 15	story2
Particles >38μm ASTM D7647 >4 2	story2
Particles >71μm ASTM D7647 >3 0	<mark>story2</mark>
Oil Cleanliness ISO 4406 (c) >/17/13 ▲ 20/19/13	story2
FLUID DEGRADATION method limit/base current history1 hi	story2
Acid Number (AN) mg KOH/g ASTM D8045 1.0 0.36	story2



Built for a lifetime

71 6

-= 5k

of particles 3k

ê 2k

0

12000

1000

800 (maa)

600 Water 400

200

1.20

(B/H0.9 E0.72

Ê 0.4

Poid 0.2

0.00

1000

600 Water (

4000

200

60

55

<u>ှ</u> 5(

-₹3 45

40


35


h20/

Se

Se

eh20/74



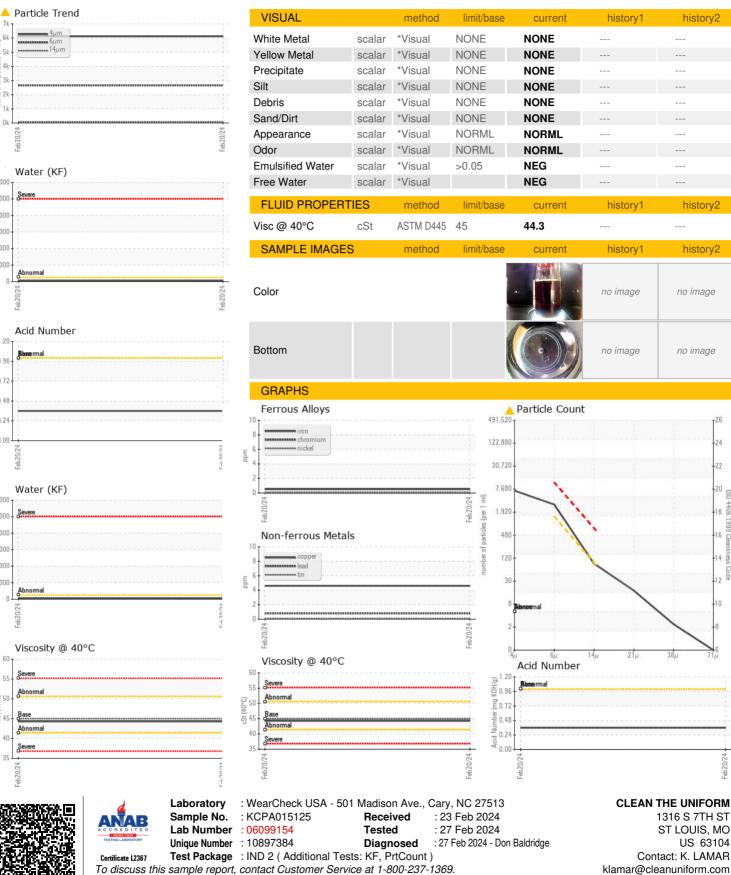

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 63104

T:

F:

history2

history

history2

no image

no imade

4406

:1999 Cle

14