


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

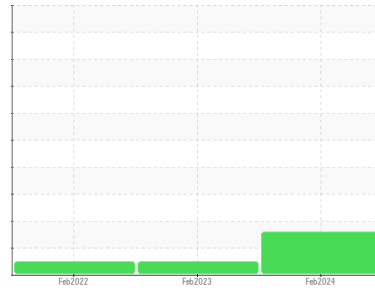

Machine Id
7283032 (S/N 1060)

Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

▲ **Recommendation**

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ **Contamination**

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KCPA015190	KCP55942	KCP38587
Sample Date	Client Info	19 Feb 2024	10 Feb 2023	11 Feb 2022
Machine Age	hrs	5285	3975	1706
Oil Age	hrs	4000	2300	1706
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	0	<1	<1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >10	<1	<1	<1
Lead	ppm	ASTM D5185m >10	<1	<1	0
Copper	ppm	ASTM D5185m >50	4	2	2
Tin	ppm	ASTM D5185m >10	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m 90	0	4	4
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m 90	30	58	80
Calcium	ppm	ASTM D5185m 2	0	2	2
Phosphorus	ppm	ASTM D5185m	<1	3	4
Zinc	ppm	ASTM D5185m	14	8	1
Sulfur	ppm	ASTM D5185m	18126	19711	16305

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<1	1	0
Sodium	ppm	ASTM D5185m	11	20	13
Potassium	ppm	ASTM D5185m >20	6	6	11
Water	%	ASTM D6304 >0.05	0.009	0.019	0.020
ppm Water	ppm	ASTM D6304 >500	97	192.7	203.6






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	3330	2996	7514
Particles >6µm	ASTM D7647 >1300	▲ 1818	795	1021
Particles >14µm	ASTM D7647 >80	▲ 365	45	67
Particles >21µm	ASTM D7647 >20	▲ 85	7	15
Particles >38µm	ASTM D7647 >4	1	0	1
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 19/18/16	19/17/13	17/13

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.36	0.32	0.37

OIL ANALYSIS REPORT

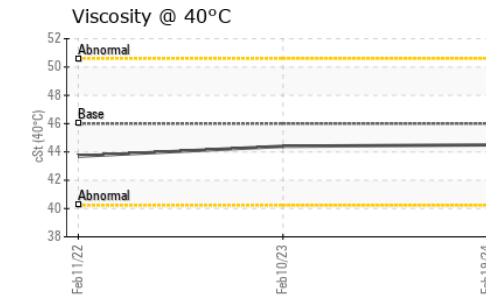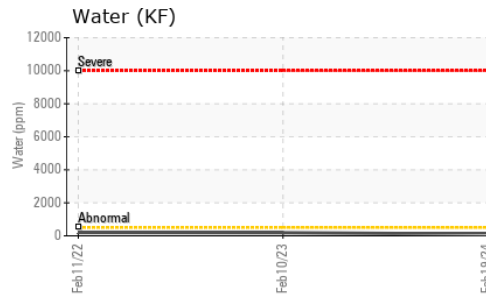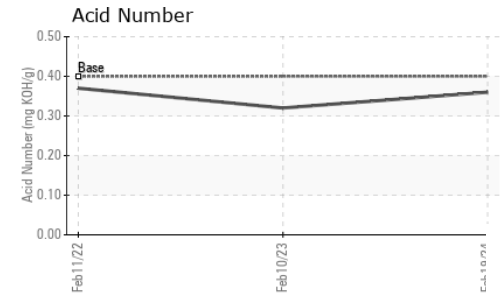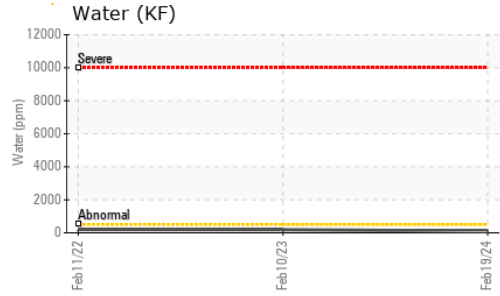
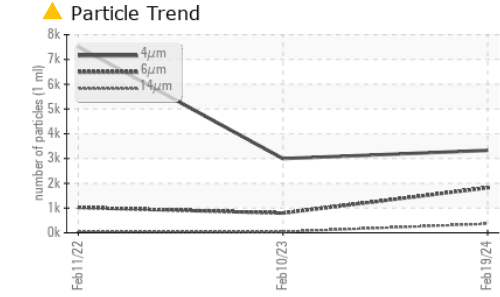


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.5	44.4	43.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

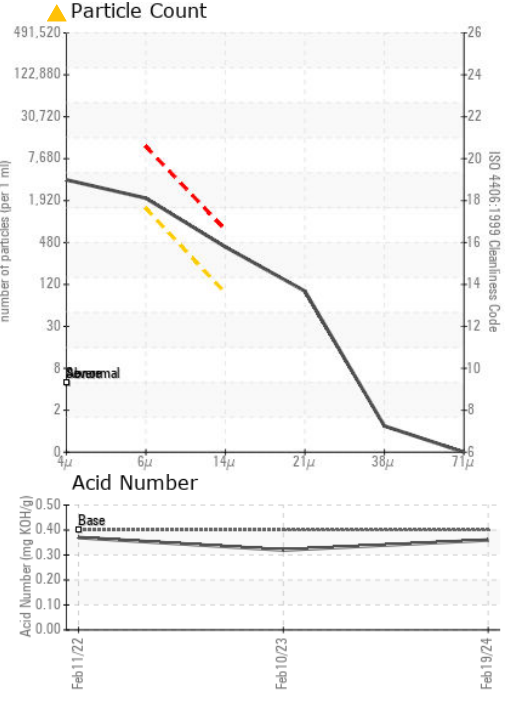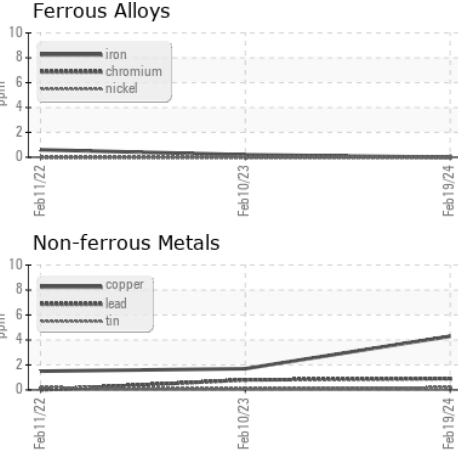

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA015190 **Received** : 23 Feb 2024
Lab Number : 06099155 **Tested** : 27 Feb 2024
Unique Number : 10897385 **Diagnosed** : 27 Feb 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

LODGE MANUFACTURING COMPANY
 204 E 5TH ST
 SOUTH PITTSBURG, TN
 US 37380
 Contact: G. HEFFLEY
 gheffley@lodgecastiron.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)