




# OIL ANALYSIS REPORT

Sample Rating Trend

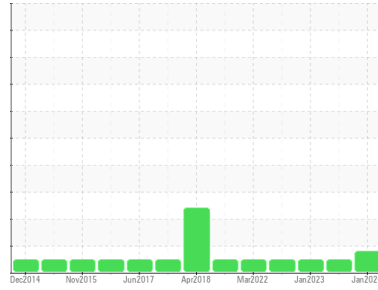

**WEAR**



Area  
**MACHINE SHOP**  
 Machine Id  
**0-5938-0000**

Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The chromium level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0867039</b>   | WC0792324   | WC0770094   |
| Sample Date   | Client Info |             | <b>28 Jan 2024</b> | 16 Apr 2023 | 17 Jan 2023 |
| Machine Age   | hrs         | Client Info | <b>8937</b>        | 8453        | 8249        |
| Oil Age       | hrs         | Client Info | <b>8937</b>        | 0           | 8249        |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>ABNORMAL</b>    | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>66</b>    | 19       | 55       |
| Chromium | ppm    | ASTM D5185m >20  | <b>▲ 20</b>  | 6        | 12       |
| Nickel   | ppm    | ASTM D5185m >4   | <b>1</b>     | 1        | 0        |
| Titanium | ppm    | ASTM D5185m      | <b>2</b>     | 2        | <1       |
| Silver   | ppm    | ASTM D5185m >3   | <b>&lt;1</b> | <1       | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>5</b>     | 2        | 3        |
| Lead     | ppm    | ASTM D5185m >40  | <b>3</b>     | 1        | 2        |
| Copper   | ppm    | ASTM D5185m >330 | <b>42</b>    | 8        | 58       |
| Tin      | ppm    | ASTM D5185m >15  | <b>1</b>     | <1       | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 1        | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 250  | <b>3</b>     | 6        | <1       |
| Barium     | ppm    | ASTM D5185m 10   | <b>5</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 100  | <b>100</b>   | 66       | 86       |
| Manganese  | ppm    | ASTM D5185m      | <b>1</b>     | 2        | <1       |
| Magnesium  | ppm    | ASTM D5185m 450  | <b>19</b>    | 22       | 13       |
| Calcium    | ppm    | ASTM D5185m 3000 | <b>4743</b>  | 3069     | 3478     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1486</b>  | 998      | 1090     |
| Zinc       | ppm    | ASTM D5185m 1350 | <b>1864</b>  | 1276     | 1359     |
| Sulfur     | ppm    | ASTM D5185m 4250 | <b>25466</b> | 18018    | 15942    |

## CONTAMINANTS

|           | method | limit/base       | current   | history1 | history2 |
|-----------|--------|------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25  | <b>10</b> | 5        | 6        |
| Sodium    | ppm    | ASTM D5185m >158 | <b>4</b>  | 3        | 4        |
| Potassium | ppm    | ASTM D5185m >20  | <b>4</b>  | 4        | 2        |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>2.2</b>  | 0.8      | 2.2      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>11.7</b> | 7.1      | 11.5     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>35.1</b> | 25.3     | 36.1     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>20.5</b> | 16.3     | 22.3     |
| Base Number (BN) | mg KOH/g | ASTM D2896 8.5  | <b>8.57</b> | 13.07    | 7.41     |




# OIL ANALYSIS REPORT


## ▲ Ferrous Alloys

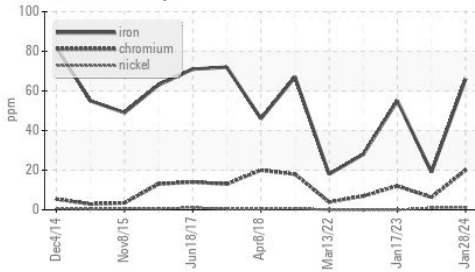

## Base Number

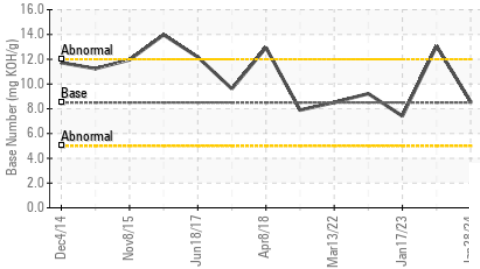

## Viscosity @ 100°C

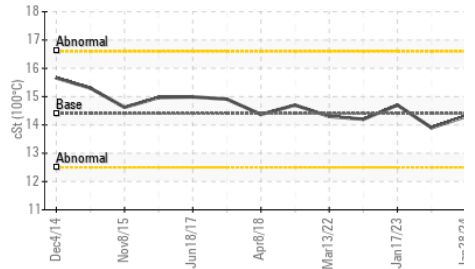


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | 14.3     | 13.9     |

## GRAPHS


### ▲ Ferrous Alloys

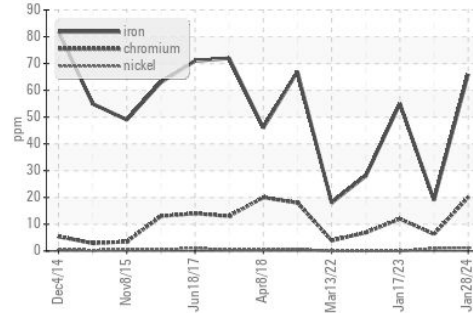


### Non-ferrous Metals

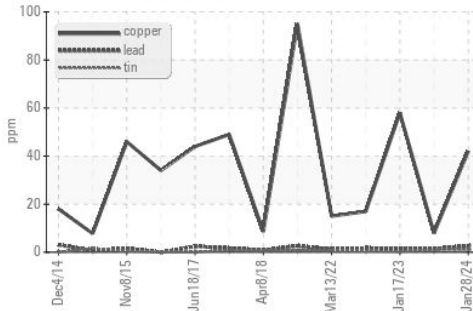

### Viscosity @ 100°C

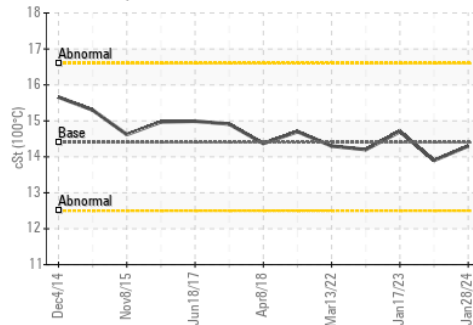

### Base Number

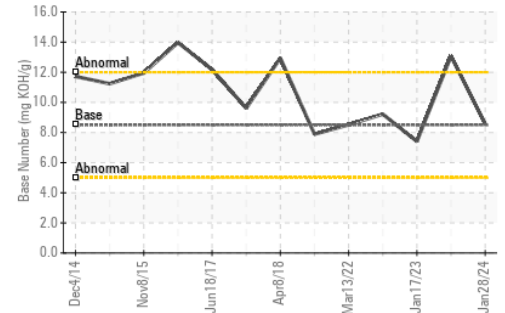

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0867039  
 Lab Number : 06099304  
 Unique Number : 10897534  
 Test Package : IND 2

**ALLVAC - MACHINE SHOP**  
 2020 ASHCRAFT AVE  
 MONROE, NC  
 US 28110  
 Contact: mark eilerman  
 mark.eilerman@atimaterials.com  
 T: (704)292-4051  
 F: (704)282-0665

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)