




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/3/EG - LOADER**  
 Machine Id  
**50.25L [OKLAHOMA^3^EG - LOADER]**  
 Component  
**Transmission (Manual)**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

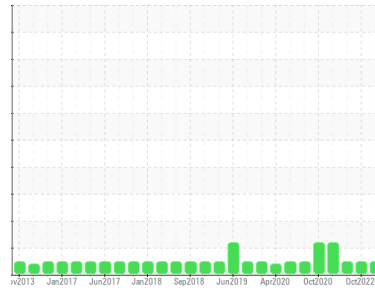

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0873968</b>	WC0746327	WC0606271
Sample Date	Client Info		<b>02 Feb 2024</b>	27 Oct 2022	30 Jul 2021
Machine Age	hrs	Client Info	<b>785</b>	21310	18509
Oil Age	hrs	Client Info	<b>293</b>	2801	1470
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>8</b>	9	13
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>7	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	2	0
Lead	ppm	ASTM D5185m	>45	<b>3</b>	4	4
Copper	ppm	ASTM D5185m	>225	<b>13</b>	16	24
Tin	ppm	ASTM D5185m	>10	<b>1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>6</b>	23	40
Barium	ppm	ASTM D5185m		<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>12</b>	20	13
Calcium	ppm	ASTM D5185m		<b>2603</b>	3231	3157
Phosphorus	ppm	ASTM D5185m		<b>886</b>	977	1042
Zinc	ppm	ASTM D5185m		<b>1165</b>	1202	1150
Sulfur	ppm	ASTM D5185m		<b>6468</b>	4922	4589

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>125	<b>6</b>	8	4
Sodium	ppm	ASTM D5185m		<b>2</b>	1	<1
Potassium	ppm	ASTM D5185m	>20	<b>16</b>	0	<1

## VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



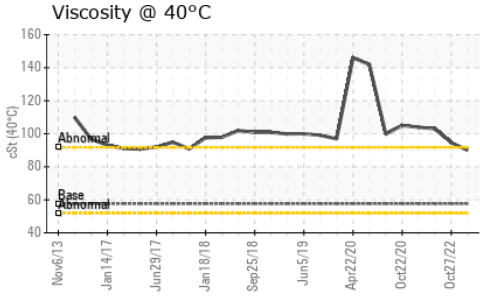


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.6	<b>90.0</b>	94.6	103

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

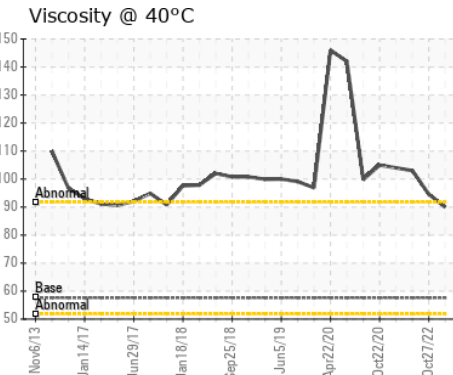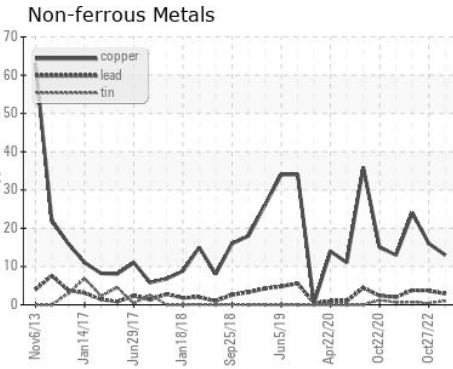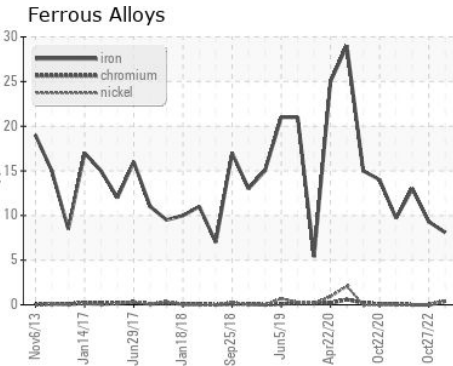

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0873968  
**Lab Number** : **06099496**  
**Unique Number** : 10897726  
**Test Package** : CONST  
**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Wes Davis

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)