




OIL ANALYSIS REPORT

Sample Rating Trend

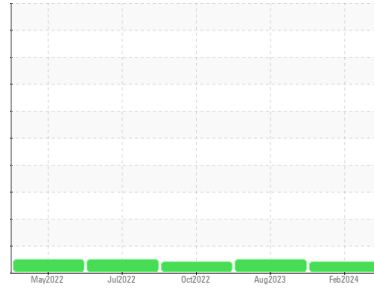

VISCOSITY



Machine Id
CR6621

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 5W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0833337	WC0556223	WC0746675
Sample Date	Client Info		16 Feb 2024	14 Aug 2023	04 Oct 2022
Machine Age	hrs	Client Info	6382	5846	5279
Oil Age	hrs	Client Info	534	567	138
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	2	2	2
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	3	<1	2
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	2	1	<1
Tin	ppm	ASTM D5185m >15	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	79	26	28
Barium	ppm	ASTM D5185m 10	34	0	0
Molybdenum	ppm	ASTM D5185m 100	4	61	56
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	753	968	821
Calcium	ppm	ASTM D5185m 3000	1051	1258	1227
Phosphorus	ppm	ASTM D5185m 1150	676	1109	1023
Zinc	ppm	ASTM D5185m 1350	820	1315	1233
Sulfur	ppm	ASTM D5185m 4250	2360	3964	3494

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	5	5
Sodium	ppm	ASTM D5185m >44	1	2	1
Potassium	ppm	ASTM D5185m >20	2	0	<1
Fuel	%	ASTM D3524 >5	0.5	<1.0	0.7

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	5.6	6.0	6.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.9	17.8	19.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.1	13.9	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.7	9.3	10.1







OIL ANALYSIS REPORT

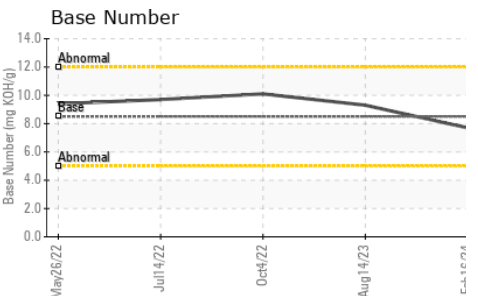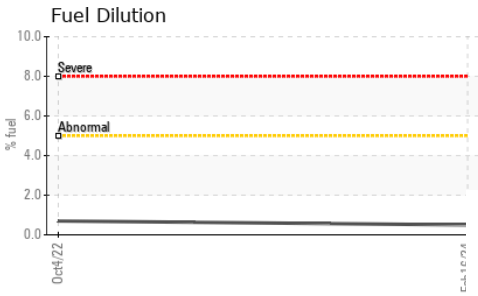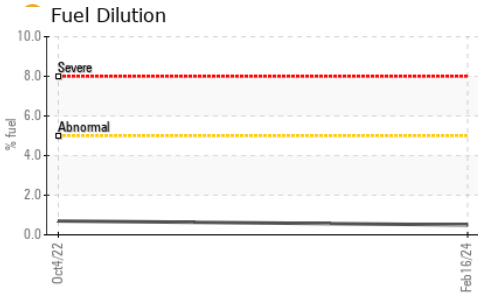

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4 ● 12.1	13.8	11.9 ●

GRAPHS

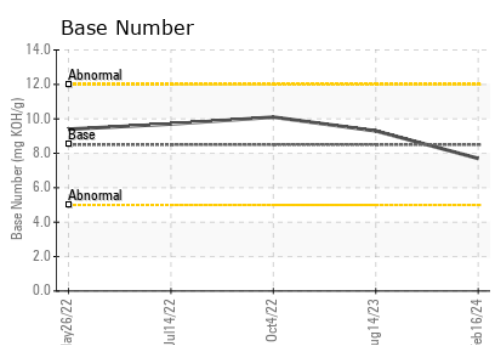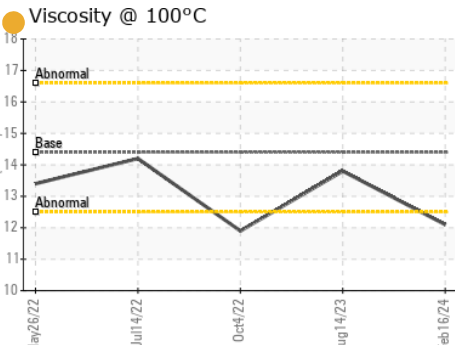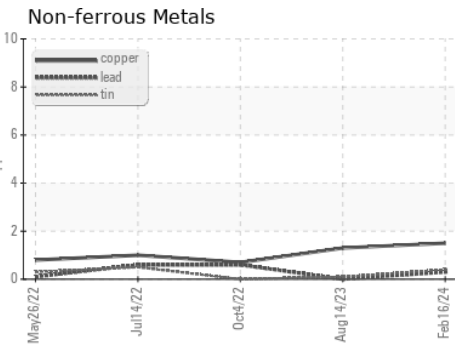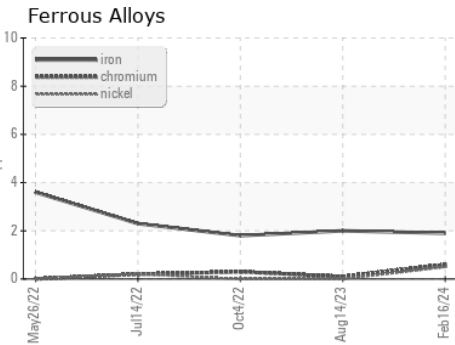

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0833337 **Received** : 26 Feb 2024
Lab Number : 06099909 **Tested** : 28 Feb 2024
Unique Number : 10898139 **Diagnosed** : 28 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

BUCKNER - WILLIS
 18123 HWY 75 NORTH
 WILLIS, TX
 US 77378
 Contact: JOHN HAWKINS
 johnh@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: