




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

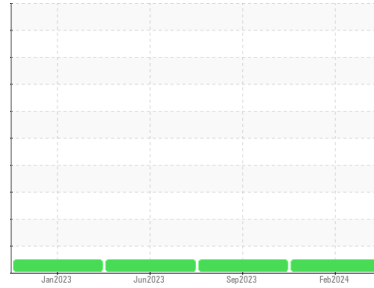

Machine Id  
**8313041**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL0034870</b>	IL06019348	IL05911752
Sample Date	Client Info			<b>16 Feb 2024</b>	05 Sep 2023	27 Jun 2023
Machine Age	mls	Client Info		<b>130579</b>	129638	106531
Oil Age	mls	Client Info		<b>0</b>	40000	40000
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>19</b>	10	37
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	3
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	0	1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	3	14
Lead	ppm	ASTM D5185m	>40	<b>2</b>	1	5
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	5
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>23</b>	24	16
Barium	ppm	ASTM D5185m	10	<b>34</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>42</b>	41	48
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m	450	<b>439</b>	477	472
Calcium	ppm	ASTM D5185m	3000	<b>1401</b>	1654	1619
Phosphorus	ppm	ASTM D5185m	1150	<b>656</b>	766	697
Zinc	ppm	ASTM D5185m	1350	<b>836</b>	872	913
Sulfur	ppm	ASTM D5185m	4250	<b>2371</b>	2296	2297



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>12</b>	8	14
Sodium	ppm	ASTM D5185m		<b>3</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	5	28

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	8.4	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	22.4	23.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.6</b>	21.0	24.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.4</b>	8.9	6.7







# OIL ANALYSIS REPORT

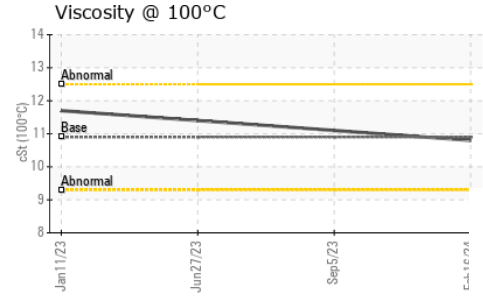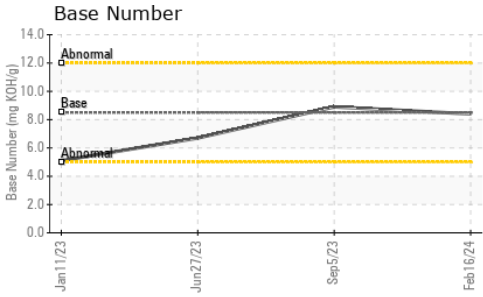

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>10.8</b>	11.1	11.4

### GRAPHS

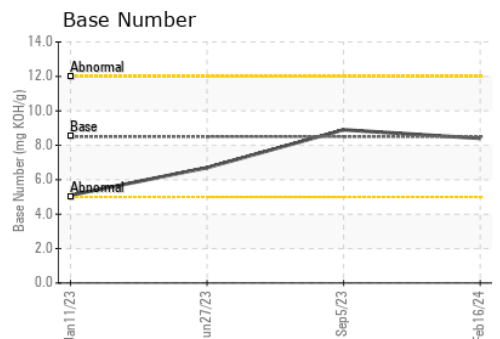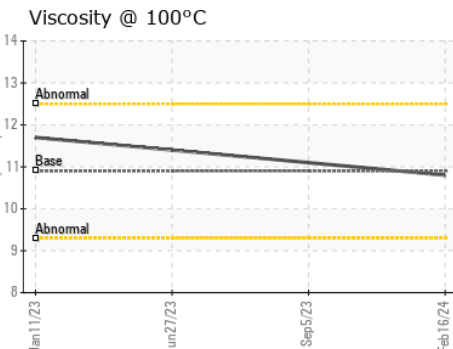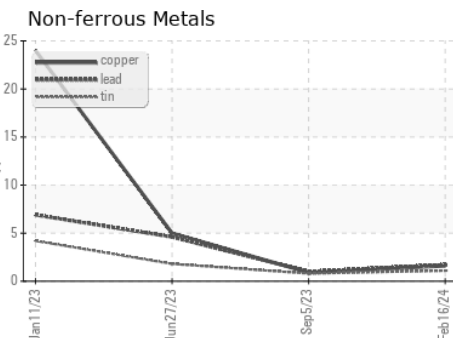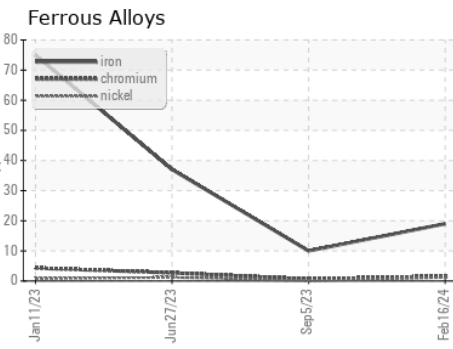

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0034870  
**Lab Number** : **06099914**  
**Unique Number** : 10898144  
**Test Package** : FLEET  
**Received** : 26 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Don Baldrige

**IDEALRELEASE OF ATLANTA - FULTON**  
 4675 BAKERS FERRY ROAD  
 ATLANTA, GA  
 US 30331  
 Contact: DAVID JOHNS  
 davidjohns@idealease.com  
 T: (404)699-5571  
 F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)