



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
BEFORE GA GUN 60 (S/N GUN060-PREGA)

Component
Hydraulic System

Fluid
BRAYCO 717 (16 GAL)

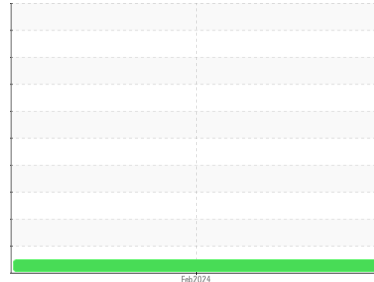

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0909329 | --- | --- |
| Sample Date | Client Info | | 21 Feb 2024 | --- | --- |
| Machine Age | hrs | Client Info | 0 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|----------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Chromium | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Tin | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m | 0 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 673 | --- | --- |
| Zinc | ppm | ASTM D5185m | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 109 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >15 | 0 | --- | --- |
| Sodium | ppm | ASTM D5185m | <1 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 0 | --- | --- |
| Water | % | ASTM D6304 >0.05 | NEG | --- | --- |

FLUID CLEANLINESS





| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 245 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | 37 | --- | --- |
| Particles >14µm | ASTM D7647 | >160 | 2 | --- | --- |
| Particles >21µm | ASTM D7647 | >40 | 1 | --- | --- |
| Particles >38µm | ASTM D7647 | >10 | 0 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 15/12/9 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|--------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.032 | --- | --- |



OIL ANALYSIS REPORT

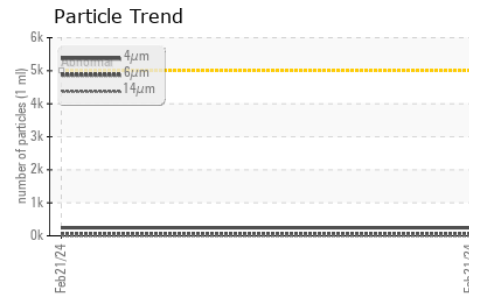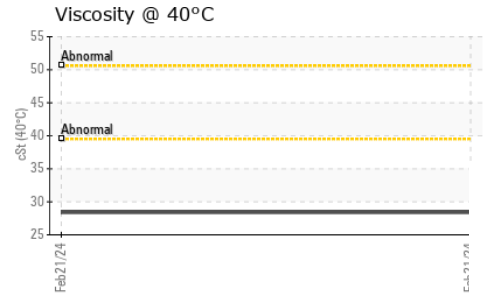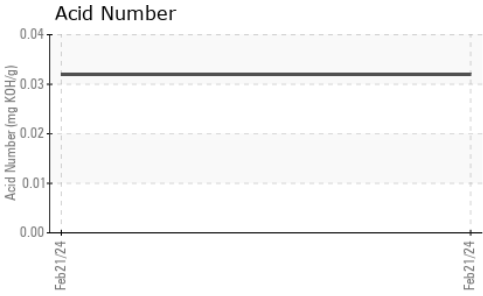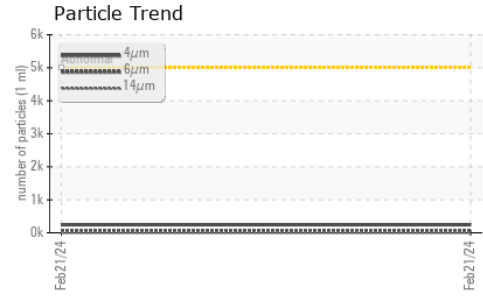






| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 28.4 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | |
|--------|--|----------|----------|
| Color | | no image | no image |
| Bottom | | no image | no image |

GRAPHS

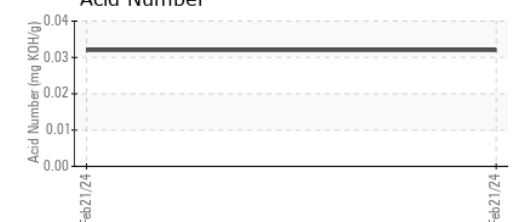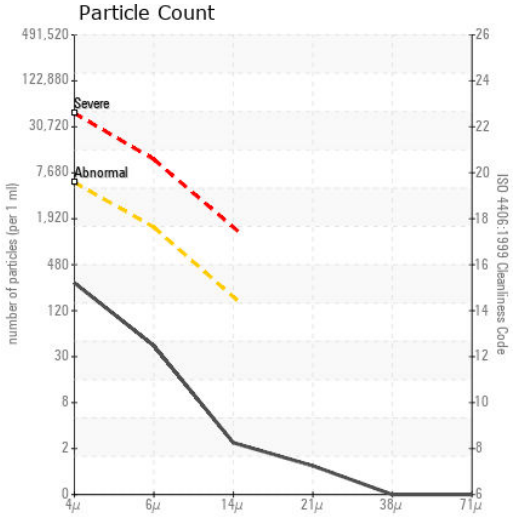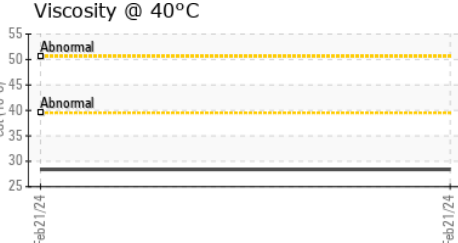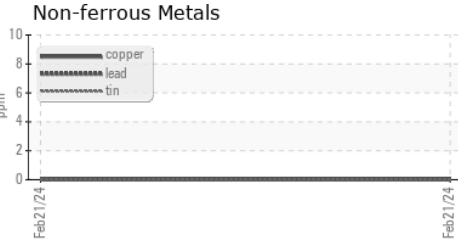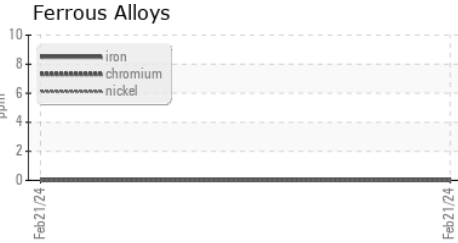

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0909329 **Received** : 26 Feb 2024
Lab Number : 06100092 **Tested** : 27 Feb 2024
Unique Number : 10898322 **Diagnosed** : 27 Feb 2024 - Angela Borella
Test Package : PLANT

BAE SYSTEMS
 163 ROCHESTER DR
 LOUISVILLE, KY
 US 40214
 Contact: JOHN MITCHELL
 john.d.mitchell@baesystems.com
 T: (502)364-5131
 F: (502)364-5973

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)