


OIL ANALYSIS REPORT

Sample Rating Trend



KAESER ASD 30 5523135 (S/N 1226)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | Feb2017 | 0et2019 | Oct2020 Oct2021 | Feb 2024 | |
|-----------------|--------|--------------|------------|-----------------|----------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCP54522 | KCP41806 | KCP20773 |
| Sample Date | | Client Info | | 15 Feb 2024 | 28 Oct 2021 | 29 Oct 2020 |
| Machine Age | hrs | Client Info | | 10168 | 7122 | 6053 |
| Oil Age | hrs | Client Info | | 0 | 459 | 2900 |
| Oil Changed | | Client Info | | Not Changd | Changed | Changed |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 0 | 1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >10 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >50 | <1 | 5 | 6 |
| Tin | ppm | ASTM D5185m | >10 | 0 | <1 | <1 |
| Antimony | ppm | ASTM D5185m | | | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 21 | <1 |
| Barium | ppm | ASTM D5185m | 90 | <1 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 90 | 60 | 54 | 52 |
| Calcium | ppm | ASTM D5185m | 2 | 0 | 0 | 1 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 0 | 4 |
| Zinc | ppm | ASTM D5185m | | 1 | 37 | 64 |
| Sulfur | ppm | ASTM D5185m | | 16329 | 17901 | 15484 |
| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | 0 | <1 |
| Sodium | ppm | ASTM D5185m | | 20 | 2 | 20 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 1 | 11 |
| Water | % | ASTM D6304 | >0.05 | 0.009 | △ 0.410 | 0.038 |
| ppm Water | ppm | ASTM D6304 | >500 | 95 | ▲ 4100 | 384.4 |
| FLUID CLEANLIN | NESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | | | |
| Particles >6µm | | ASTM D7647 | >1300 | | | |
| Particles >14µm | | ASTM D7647 | >80 | | | |
| Particles >21µm | | ASTM D7647 | >20 | | | |
| Particles >38µm | | ASTM D7647 | >4 | | | |
| Particles >71µm | | ASTM D7647 | >3 | | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| | | | | | | |


Acid Number (AN)




OIL ANALYSIS REPORT








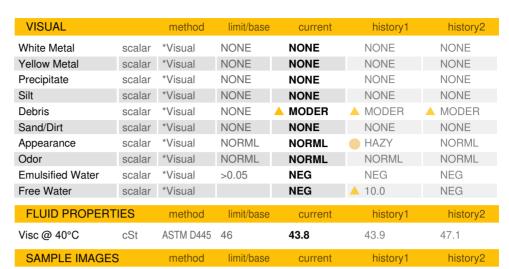



GRAPHS


Color

Bottom













Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: KCP54522 : 06100128 **Unique Number** : 10898358

Received **Tested**

: 28 Feb 2024 Diagnosed

: 28 Feb 2024 - Don Baldridge

: 26 Feb 2024

BOSTON SCIENTIFIC 500 COMMANDER SHEA BLVD QUINCY, MA US 02171

Contact:

T: F:

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)